

GLYPH

a super regular RISC architecture

Michael Clark

April 3, 2025 DRAFT

Contents

1. Architecture	2
1.1. Introduction	2
1.2. Instruction format	3
1.2.1. instruction templates	3
1.2.2. size encoding	4
1.2.3. 16-bit instructions	4
1.3. Constant stream	5
1.4. Register file	6
2. Instructions	7
2.1. 16-bit opcodes	7
2.1.1. break	7
2.1.2. j	7
2.1.3. b	7
2.1.4. ibj	8
2.1.5. jalib	8
2.1.6. jtlib	8
2.1.7. lib.i64	8
2.1.8. li.i64	9
2.1.9. addi.i64	9
2.1.10. srli.i64	9
2.1.11. srai.i64	9
2.1.12. slli.i64	10
2.1.13. addib.i64	10
2.1.14. load.i64	10
2.1.15. loadib.i64	10
2.1.16. cmp.i64	11
2.1.17. subib.i64	11
2.1.18. store.i64	11
2.1.19. storeib.i64	12
2.1.20. logic.i64	12
2.1.21. pin.i64	12
2.1.22. and.i64	13
2.1.23. or.i64	13
2.1.24. xor.i64	13
2.1.25. sub.i64	13
2.1.26. srl.i64	14

Contents

2.1.27. sra.i64	14
2.1.28. sll.i64	14
2.1.29. add.i64	14
2.1.30. mul.i64	15
2.1.31. div.i64	15
2.1.32. illegal	15
A. Appendix	16
A.1. 16-bit opcodes	17

1. Architecture

1.1. Introduction

glyph is a super regular RISC architecture that encodes constants in a secondary constant stream accessed via an immediate base register. the immediate base register branches like the program counter and the call instructions sets (pc, ib) together for procedure calls and returns.

glyph uses relative addresses in its link register which is different to typical RISC architectures. glyph needs to do this for the branch instruction to fit (pc, ib) into the link register for compatibility. glyph achieves this by packing together two 32-bit relative (pc, ib) displacements in an $i32x2$ vector.

immediate blocks can be linked together using relative displacements and switched using the constant branch instruction detailed below. immediate blocks, unlike typical RISC architectures, mean that most relocations are word sized like CISC architectures, and can use C-style structure packing and alignment rules.

this list outlines some differentiating elements of the super regular RISC architecture:

- variable length instruction format supporting 16, 32, 64, and 128-bit instructions.
- 16-bit compressed instruction packets can access 8x64-bit registers.
- (pc, ib) is a special program counter and immediate base register address vector.
- link register contains packed $i32x2$ relative address vector to function entry.
- `ibj` *immediate-block-jump* adds a relative address to the immediate base register.
- `lib` *load-immediate-block* uses unsigned displacement to access constants.
- `jlib` *jump-and-link-immediate-block* or *call* links address vector and adds constants to (pc, ib) and is used to branch the program counter and immediate base register at the same time for calling procedures.
- `jtlib` *jump-to-link-immediate-block* or *ret* subtracts link vector from and adds constants to (pc, ib) and is used to branch the program counter and immediate base register at the same time for returning from called procedures.
- `pin` *pack-indirect* packs two absolute addresses as relative address vector from (pc, ib) and is used for calling absolute addresses such as virtual functions.

1. Architecture

1.2. Instruction format

glyph has a variable length instruction format supporting 16, 32, 64, and 128-bit instruction packets. the instruction packet has been designed to use a *super regular* scheme, whereby successive instruction packets extend the fields in the previous packet.

1.2.1. instruction templates

the variable length instruction format has a single base format where fields in the template instruction form are extended by successive instruction packets.

15	7	6	2	1	0
<i>operand</i> _[8:0]		<i>opcode</i> _[4:0]		<i>sz</i> _[1:0]	

Figure 1.1.: 16-bit instruction template.

15	7	6	2	1	0
<i>operand</i> _[8:0]		<i>opcode</i> _[4:0]		<i>sz</i> _[1:0]	
<i>operand</i> _[17:9]		<i>opcode</i> _[9:5]		<i>sz</i> _[3:2]	

Figure 1.2.: 32-bit instruction template.

15	7	6	2	1	0
<i>operand</i> _[8:0]		<i>opcode</i> _[4:0]		<i>sz</i> _[1:0]	
<i>operand</i> _[17:9]		<i>opcode</i> _[9:5]		<i>sz</i> _[3:2]	
<i>operand</i> _[26:18]		<i>opcode</i> _[14:10]		<i>sz</i> _[5:4]	
<i>operand</i> _[35:27]		<i>opcode</i> _[19:15]		<i>sz</i> _[7:6]	

Figure 1.3.: 64-bit instruction template.

15	7	6	2	1	0
<i>operand</i> _[8:0]		<i>opcode</i> _[4:0]		<i>sz</i> _[1:0]	
<i>operand</i> _[17:9]		<i>opcode</i> _[9:5]		<i>sz</i> _[3:2]	
<i>operand</i> _[26:18]		<i>opcode</i> _[14:10]		<i>sz</i> _[5:4]	
<i>operand</i> _[35:27]		<i>opcode</i> _[19:15]		<i>sz</i> _[7:6]	
<i>operand</i> _[44:36]		<i>opcode</i> _[24:20]		<i>sz</i> _[9:8]	
<i>operand</i> _[53:45]		<i>opcode</i> _[29:25]		<i>sz</i> _[11:10]	
<i>operand</i> _[62:54]		<i>opcode</i> _[34:30]		<i>sz</i> _[13:12]	
<i>operand</i> _[71:63]		<i>opcode</i> _[39:35]		<i>sz</i> _[15:14]	

Figure 1.4.: 128-bit instruction template.

1. Architecture

1.2.2. size encoding

the variable length instruction format has a *2-bit* size field in a fixed position in every 16-bit instruction packet, somewhat inspired by LEB128, to reduce the complexity of variable length instruction size decoding.

Instruction Size	Size Fields
16-bit	{00}
32-bit	{01,11}
64-bit	{10,11,11,11}
128-bit	{11,11,11,11,11,11,11,11}

Table 1.1.: Variable-length instruction size fields

1.2.3. 16-bit instructions

the 16-bit instructions forms are super regular in that operand and opcode bits do not overlap and the number and complexity of the formats is reduced so that vectorized instruction decoding is easier in software. the scheme is designed so that *1-bit* of coding space in the larger packet can be used to extend register sizes for the 16-bit ops.

15	7	6	2	1	0
<i>imm</i> _[5:0]			<i>opcode</i> _[4:0]	00	

Figure 1.5.: 16-bit large immediate.

15	13	12	7	6	2	1	0
<i>rc</i> _[2:0]		<i>imm</i> _[5:0]		<i>opcode</i> _[4:0]		00	

Figure 1.6.: 16-bit one operand with immediate.

15	13	12	10	9	7	6	2	1	0
<i>rc</i> _[2:0]		<i>rb</i> _[2:0]		<i>imm</i> _[2:0]		<i>opcode</i> _[4:0]		00	

Figure 1.7.: 16-bit two operand with immediate.

15	13	12	10	9	7	6	2	1	0
<i>rc</i> _[2:0]		<i>rb</i> _[2:0]		<i>ra</i> _[2:0]		<i>opcode</i> _[4:0]		00	

Figure 1.8.: 16-bit three operand.

1.3. Constant stream

glyph separates the instruction stream into two streams, one with instructions and one with constants. the instruction stream is addressed with the *program counter* (*pc*) and the constant stream is addressed with the *immediate base register* (*ib*).

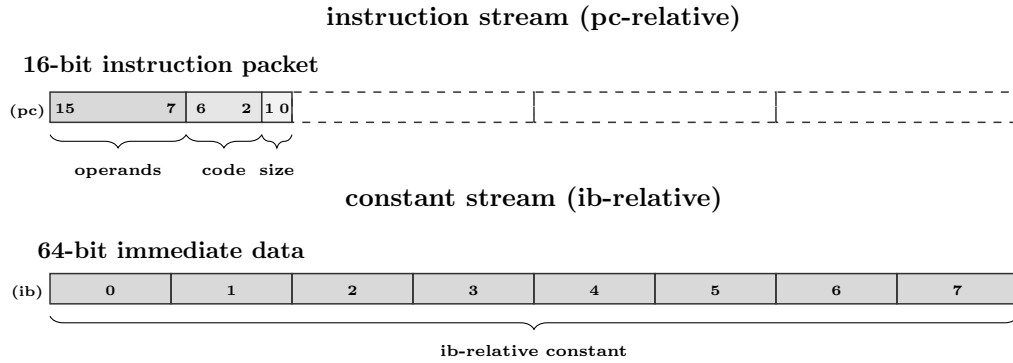


Figure 1.9.: program counter and immediate base register.

the instruction and constant streams can branch at the same time using special call and return instructions; *jump-and-link-immediate-block*, *jump-to-link-immediate-block*, and *pack-indirect* which add and subtract relative address vectors to (pc, ib) , the program counter and the immediate base register.

immediate blocks are 64-byte aligned blocks addressed by the *immediate base register* which contain eight 64-bit constants. immediate blocks can be navigated by branching the constant stream independently using the *immediate-block-jump* instruction. return from procedure restores (pc, ib) using a link register containing a packed *i32x2* relative address vector to support backward compatibility with a single link register.

the instruction forms only use bonded register slots for immediate operands and they do not overlap opcode bits. the use of immediate blocks means large immediate constants can all be accessed with short references encoded inside of register slots.

1.4. Register file

the glyph register file is extensible due to the variable length instruction format and supports a different number of registers depending on the instruction size.

- 16-bit instruction packet can access $8 \times 64\text{-bit}$ registers with up to 3 operands.
- 32-bit instruction packet can access $64 \times 64\text{-bit}$ registers with up to 3 operands.
- 64-bit instruction packet can access $64 \times 64\text{-bit}$ registers with up to 6 operands.

the register state accessible by the 16-bit instruction packet is comprised of:

- 64-bit program counter register (aligned to 2 bytes).
- 64-bit immediate base register (aligned to 64 bytes).
- $8 \times 64\text{-bit}$ general purpose registers.
- $1 \times 1\text{-bit}$ predicate register.

the following diagram shows the register state accessible by the 16-bit instruction packet:

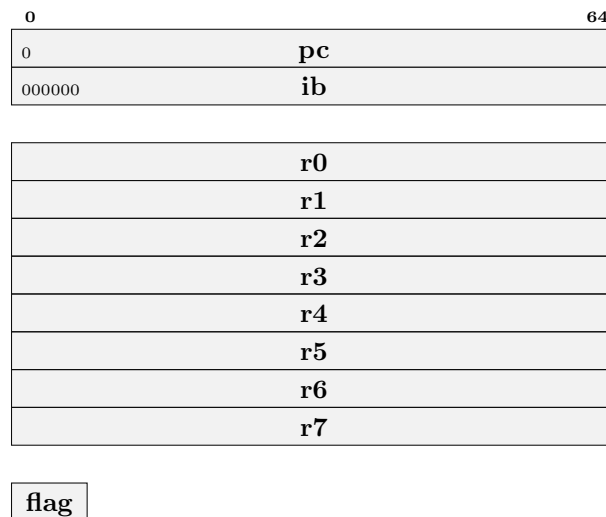


Figure 1.10.: 64-bit register state accessible by 16-bit instruction packet.

2. Instructions

2.1. 16-bit opcodes

2.1.1. break

15	7	6	2	1	0
<i>imm9</i>			<i>opcode</i>	<i>size</i>	
uimm			00000	00	

break uimm9

The *break* instruction causes a trap to the debugger. The program counter and trap cause are saved to privileged registers for the operating system to dispatch to a debugger.

2.1.2. j

15	7	6	2	1	0
<i>imm9</i>			<i>opcode</i>	<i>size</i>	
simm			00001	00	

j simm9

The *j* or *jump* instruction is an unconditional branch instruction that adds a relative immediate address to the program counter. The resulting address is $pc + \text{simm9} + 2$.

```
pc += simm9 * 2 + 2
```

2.1.3. b

15	7	6	2	1	0
<i>imm9</i>			<i>opcode</i>	<i>size</i>	
simm			00010	00	

b simm9

The *b* or *branch* instruction is a conditional branch instruction that adds a relative immediate address to the program counter, if the *flag* register has been set by a compare instruction. The resulting address is $pc + \text{simm9} + 2$.

```
if flag:
    pc += simm9 * 2 + 2
```

2. Instructions

2.1.4. ibj

15	7	6	2	1	0
<i>imm9</i>			<i>opcode</i>		<i>size</i>
simm		00011		00	

ibj *simm9*

the *ibj* or *immediate-block-jump* instruction adds a 64-bit relative address to the immediate base register.

```
ib += simm9 * 64
```

2.1.5. jalib

15	13	12	7	6	2	1	0
<i>rc</i>		<i>imm6</i>			<i>opcode</i>		<i>size</i>
rc		uimm		00100		00	

jalib *rc*, *ib32x2(uimm6*8)*

the *jalib* or *jump-and-link-immediate-block* instruction loads a 64-bit constant addressed by $ib + uimm6 * 8$ containing a *i32x2* relative address vector, adds it to (pc, ib) , then saves the relative address vector to the *rc* register.

```
tmp = (i32x2)[ib + uimm6 * 8]
{rpc,rib} = (i32x2)tmp
pc += rpc + 2
ib += rib
r[rc] = tmp
```

2.1.6. jtlib

15	13	12	7	6	2	1	0
<i>rc</i>		<i>imm6</i>			<i>opcode</i>		<i>size</i>
rc		uimm		00101		00	

jtlib *rc*, *ib32x2(uimm6*8)*

the *jtlib* or *jump-to-link-immediate-block* instruction loads a 64-bit constant addressed by $ib + uimm6 * 8$ containing a *i32x2* relative address vector, subtracts the *i32x2* relative address vector in the *rc* register from it, then adds it to (pc, ib) .

```
{rpc,rib} = (i32x2)r[rc]
{dpc,dib} = (i32x2)[ib + uimm6 * 8]
pc += dpc - rpc
ib += dib - rib
```

2. Instructions

2.1.7. lib.i64

15	13	12	7	6	2	1	0
<i>rc</i>	<i>imm6</i>			<i>opcode</i>	<i>size</i>		
rc	uimm			00110	00		

lib.i64 rc, ib64(uimm6*8)

the *lib* or *load-immediate-block* instruction loads a 64-bit constant addressed by *ib* + *uimm6* * 8 then saves it to the *rc* register.

$$r[rc] = (i64)[ib + uimm6 * 8]$$

2.1.8. li.i64

15	13	12	7	6	2	1	0
<i>rc</i>	<i>imm6</i>			<i>opcode</i>	<i>size</i>		
rc	simm			00111	00		

li.i64 rc, simm6

the *li* or *load-immediate* instruction sign-extends *simm6* then saves it to the *rc* register.

$$r[rc] = simm6$$

2.1.9. addi.i64

15	13	12	7	6	2	1	0
<i>rc</i>	<i>imm6</i>			<i>opcode</i>	<i>size</i>		
rc	simm			01000	00		

addi.i64 rc, simm6

the *addi* or *add-immediate* instruction sign-extends *simm6* then adds it to the *rc* register.

$$r[rc] = r[rc] + simm6$$

2.1.10. srli.i64

15	13	12	7	6	2	1	0
<i>rc</i>	<i>imm6</i>			<i>opcode</i>	<i>size</i>		
rc	uimm			01001	00		

srli.i64 rc, uimm6

the *srli* or *shift-right-logical-immediate* instruction performs a logical right shift by *uimm6* bits of the value in the *rc* register. zeros are copied into the right most bits.

$$r[rc] = (u64)r[rc] \gg simm6$$

2. Instructions

2.1.11. srai.i64

15	13	12	7	6	2	1	0
<i>rc</i>	<i>imm6</i>			<i>opcode</i>	<i>size</i>		
rc	uimm			01010	00		

srai.i64 rc, uimm6

the *srai* or *shift-right-arithmetic-immediate* instruction performs an arithmetic right shift by *uimm6* bits of the value in the *rc* register. sign is copied into the right most bits.

$$r[rc] = (i64)r[rc] \gg \text{uimm6}$$

2.1.12. slli.i64

15	13	12	7	6	2	1	0
<i>rc</i>	<i>imm6</i>			<i>opcode</i>	<i>size</i>		
rc	uimm			01011	00		

slli.i64 rc, uimm6

the *slli* or *shift-left-logical-immediate* instruction performs a logical left shift by *uimm6* bits of the value in the *rc* register.

$$r[rc] = r[rc] \ll \text{uimm6}$$

2.1.13. addib.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>	<i>rb</i>	<i>imm3</i>		<i>opcode</i>		<i>size</i>			
rc	rb	uimm		01100		00			

addib.i64 rc, rb, ib64(uimm3*8)

the *addib* or *add-immediate-block* instruction loads a 64-bit constant addressed by *ib* + *uimm3* * 8 then adds it to the *rb* register and saves the result in the *rc* register.

$$r[rc] = r[rb] + (i64)[ib + \text{uimm3} * 8]$$

2.1.14. load.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>	<i>rb</i>	<i>imm3</i>		<i>opcode</i>		<i>size</i>			
rc	rb	uimm		01101		00			

load.i64 rc, uimm3(rb))

the *load* instruction adds *uimm3* * 8 to the *rb* to form an address, then loads a 64-bit value from memory at that address and saves the result in the *rc* register.

$$r[rc] = (i64)[r[rb] + \text{uimm3} * 8]$$

2. Instructions

2.1.15. loadib.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>imm3</i>		<i>opcode</i>		<i>size</i>	
rc		rb		uimm		01110		00	

loadib.i64 rc, ib64(uimm3*8)(rb)

the *loadib* instruction loads a 64-bit constant addressed by $ib + uimm3 * 8$ and adds to the *rb* to form an address, then loads a 64-bit value from memory at that address and saves the result in the *rc* register.

```
r[rc] = (i64)r[rb] + (i64)[ib + uimm3 * 8]
```

2.1.16. cmp.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>imm3</i>		<i>opcode</i>		<i>size</i>	
rc		rb		uimm		01111		00	

cmp.i64 rc, rb, fun3

the *cmp* instruction performs a comparison between the value in *rb* and *rc* then saves the result to the *flag* register. the type of comparison in *fun3* can be one of: 0 → *less than*, 1 → *greater than or equal*, 2 → *equal*, 3 → *not equal*, 4 → *less than (unsigned)*, or 5 → *greater than or equal (unsigned)*.

```
flag = match fun3
| le -> (i64)r[rc] < (i64)r[rb]
| ge -> (i64)r[rc] >= (i64)r[rb]
| eq ->      r[rc] =      r[rb]
| ne ->      r[rc] !=      r[rb]
| leu -> (u64)r[rc] < (u64)r[rb]
| geu -> (u64)r[rc] >= (u64)r[rb]
```

2.1.17. subib.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>imm3</i>		<i>opcode</i>		<i>size</i>	
rc		rb		uimm		10000		00	

subib.i64 rc, rb, ib64(uimm3*8)

the *subib* or *sub-immediate-block* instruction loads a 64-bit constant addressed by $ib + uimm3 * 8$ then subtracts it from the *rb* register and saves the result in the *rc* register.

```
r[rc] = r[rb] - (i64)[ib + uimm3 * 8]
```

2. Instructions

2.1.18. store.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>imm3</i>		<i>opcode</i>		<i>size</i>	
rc		rb		uimm		10001		00	

store.i64 rc, uimm3(rb))

the *store* instruction adds $uimm3 * 8$ to the *rb* register to form an address, then stores to memory at that address a 64-bit value from the *rc* register.

$$(i64)[r[rb] + uimm3 * 8] = r[rc]$$

2.1.19. storeib.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>imm3</i>		<i>opcode</i>		<i>size</i>	
rc		rb		uimm		10010		00	

storeib.i64 rc, ib64(uimm3*8)(rb)

the *storeib* instruction loads a 64-bit constant addressed by $ib + uimm6 * 8$ and adds to the the *rb* register to form an address, then stores to memory at that address a 64-bit value from the *rc* register.

$$(i64)[r[rb] + (i64)[ib + uimm3 * 8]] = r[rc]$$

2.1.20. logic.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>imm3</i>		<i>opcode</i>		<i>size</i>	
rc		rb		uimm		10011		00	

logic.i64 rc, rb, fun3

the *logic* instruction performs a logic operation on the value in the *rb* register then stores the result in the *rc* register. the type of logic operations in *fun3* can be one of: $0 \rightarrow \text{move}$, $1 \rightarrow \text{logical not}$, $2 \rightarrow \text{negate}$, $3 \rightarrow \text{bswap}$, $4 \rightarrow \text{count trailing zeros}$, $5 \rightarrow \text{count leading zeros}$, or $6 \rightarrow \text{count population}$.

```
match fun3
| mov   -> r[rc] = r[rb]
| not   -> r[rc] = ~r[rb]
| neg   -> r[rc] = -r[rb]
| bswap -> r[rc] = bswap64(r[rb])
| ctz   -> r[rc] = ctz64(r[rb])
| clz   -> r[rc] = clz64(r[rb])
| ctpop -> r[rc] = ctpop(r[rb])
```

2. Instructions

2.1.21. pin.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>ra</i>			<i>opcode</i>		<i>size</i>
rc		rb		ra			10100		00

pin.i64 rc, rb, ra

the *pin* or *pack-indirect* instruction packs two absolute addresses as an *i32x2* (*pc,ib*) relative address vector. the register *ra* is subtracted from the *program counter + 2*, and the register *rb* is subtracted from *immediate base register*, and the results are packed into an *i32x2* relative address vector and saved to the register *rc*.

```
rpc = (i32)(pc - r[ra] + 2)
rib = (i32)(ib - r[rb]    )
r[rc] = (i32x2){rpc,rib}
```

2.1.22. and.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>ra</i>			<i>opcode</i>		<i>size</i>
rc		rb		ra			10101		00

and.i64 rc, rb, ra

the *and* instruction performs a *logical-and* of the register *rb* and the register *ra* and saves the result in the register *rc*.

```
r[rc] = r[rb] & r[ra]
```

2.1.23. or.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>ra</i>			<i>opcode</i>		<i>size</i>
rc		rb		ra			10110		00

or.i64 rc, rb, ra

the *or* instruction performs a *logical-or* of the register *rb* and the register *ra* and saves the result in the register *rc*.

```
r[rc] = r[rb] | r[ra]
```

2.1.24. xor.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>ra</i>			<i>opcode</i>		<i>size</i>
rc		rb		ra			10111		00

xor.i64 rc, rb, ra

the *xor* instruction performs a *logical-exclusive-or* of the register *rb* and the register *ra* and saves the result in the register *rc*.

```
r[rc] = r[rb] ^ r[ra]
```

2. Instructions

2.1.25. sub.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>ra</i>			<i>opcode</i>		<i>size</i>
rc		rb		ra			11000		00

sub.i64 rc, rb, ra

the *sub* instruction subtracts the *ra* register from the *rb* register and saves the result in the *rc* register.

$$r[rc] = r[rb] - r[ra]$$

2.1.26. srl.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>ra</i>			<i>opcode</i>		<i>size</i>
rc		rb		ra			11001		00

srl.i64 rc, rb, ra

the *srl* or *shift-right-logical* instruction performs a logical right shift of the value in the *rb* register by the number of bits in register *ra* then saves the result in the *rc* register. zeros are copied into the right most bits.

$$r[rc] = (u64)r[rb] \gg r[ra]$$

2.1.27. sra.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>ra</i>			<i>opcode</i>		<i>size</i>
rc		rb		ra			11010		00

sra.i64 rc, rb, ra

the *sra* or *shift-right-arithmetic* instruction performs an arithmetic right shift of the value in the *rb* register by the number of bits in register *ra* then saves the result in the *rc* register. sign is copied into the right most bits.

$$r[rc] = (i64)r[rb] \gg r[ra]$$

2.1.28. sll.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>		<i>rb</i>		<i>ra</i>			<i>opcode</i>		<i>size</i>
rc		rb		ra			11011		00

sll.i64 rc, rb, ra

the *sll* or *shift-left-logical* instruction performs a logical left shift of the value in the *rb* register by the number of bits in register *ra* then saves the result in the *rc* register.

$$r[rc] = r[rb] \ll r[ra]$$

2. Instructions

2.1.29. add.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>	<i>rb</i>	<i>ra</i>	<i>opcode</i>				<i>size</i>		
rc	rb	ra	11100				00		

add.i64 rc, rb, ra

the *add* instruction adds the *rb* register to the *ra* register and saves the result in the *rc* register.

$$r[rc] = r[rb] + r[ra]$$

2.1.30. mul.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>	<i>rb</i>	<i>ra</i>	<i>opcode</i>				<i>size</i>		
rc	rb	ra	11101				00		

mul.i64 rc, rb, ra

the *mul* instruction performs signed multiplication of the *rb* register with the *ra* register and saves the result in the *rc* register.

$$r[rc] = r[rb] * r[ra]$$

2.1.31. div.i64

15	13	12	10	9	7	6	2	1	0
<i>rc</i>	<i>rb</i>	<i>ra</i>	<i>opcode</i>				<i>size</i>		
rc	rb	ra	11110				00		

div.i64 rc, rb, ra

the *div* instruction performs signed division of the *rb* register by the *ra* register and saves the result in the *rc* register. division by zero causes a divide by zero exception.

$$r[rc] = r[rb] / r[ra]$$

2.1.32. illegal

15	7	6	2	1	0
<i>imm9</i>		<i>opcode</i>		<i>size</i>	
uimm		11111		00	

illegal uimm9

the *illegal* instruction causes an illegal instruction trap.

A. Appendix

A.1. 16-bit opcodes

15	13	12	10	9	7	6	2	1	0	
uimm						00000	00			break uimm9
simm						00001	00			j simm9
simm						00010	00			b simm9
simm						00011	00			ibj simm9
rc	uimm					00100	00			jalib rc, ib32x2(uimm6*8)
rc	uimm					00101	00			jtlib rc, ib32x2(uimm6*8)
rc	uimm					00110	00			lib.i64 rc, ib64(uimm6*8)
rc	simm					00111	00			li.i64 rc, simm6
rc	simm					01000	00			addi.i64 rc, simm6
rc	uimm					01001	00			srli.i64 rc, uimm6
rc	uimm					01010	00			srai.i64 rc, uimm6
rc	uimm					01011	00			slli.i64 rc, uimm6
rc	rb	uimm				01100	00			addib.i64 rc, rb, ib64(uimm3*8)
rc	rb	uimm				01101	00			load.i64 rc, uimm3(rb))
rc	rb	uimm				01110	00			loadib.i64 rc, ib64(uimm3*8)(rb)
rc	rb	uimm				01111	00			cmp.i64 rc, rb, fun3
rc	rb	uimm				10000	00			subib.i64 rc, rb, ib64(uimm3*8)
rc	rb	uimm				10001	00			store.i64 rc, uimm3(rb))
rc	rb	uimm				10010	00			storeib.i64 rc, ib64(uimm3*8)(rb)
rc	rb	uimm				10011	00			logic.i64 rc, rb, fun3
rc	rb	ra				10100	00			pin.i64 rc, rb, ra
rc	rb	ra				10101	00			and.i64 rc, rb, ra
rc	rb	ra				10110	00			or.i64 rc, rb, ra
rc	rb	ra				10111	00			xor.i64 rc, rb, ra
rc	rb	ra				11000	00			sub.i64 rc, rb, ra
rc	rb	ra				11001	00			srl.i64 rc, rb, ra
rc	rb	ra				11010	00			sra.i64 rc, rb, ra
rc	rb	ra				11011	00			sll.i64 rc, rb, ra
rc	rb	ra				11100	00			add.i64 rc, rb, ra
rc	rb	ra				11101	00			mul.i64 rc, rb, ra
rc	rb	ra				11110	00			div.i64 rc, rb, ra
uimm						11111	00			illegal uimm9