



▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3	N/A	2-1



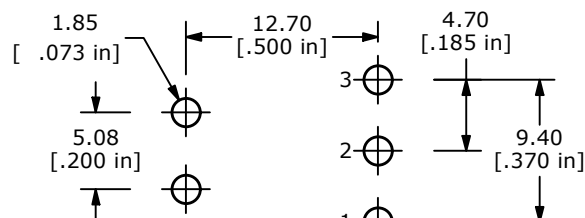


RECOMMENDED PCB LAYOUT



## NOTE:

- 1 . ALL DIMENSIONS IN MM [INCH]
- 2 . GENERAL TOLERANCE: X.X=± 0.4  
X XX=± 0.25
- 3 . TERMINAL NUMBERS FOR REF ONLY
- ▲ 4 . CONTACT MATERIAL: GOLD
- 5 . RATING: 0.4 VOLT-AMPS (VA) MAX. @ 20V MAX. (AC OR DC)
- 6 . ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES  
AT FULL LOAD.
- 7 . INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- 8 . DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- 9 . OPERATING TEMP.: -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

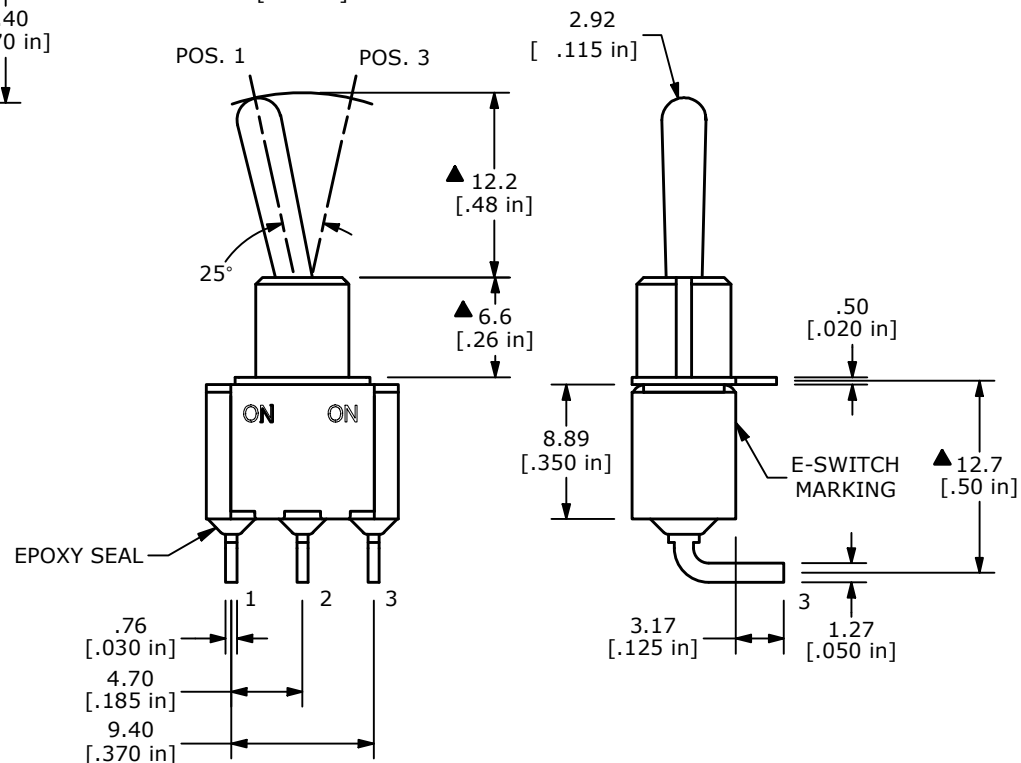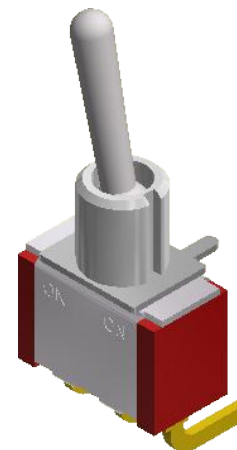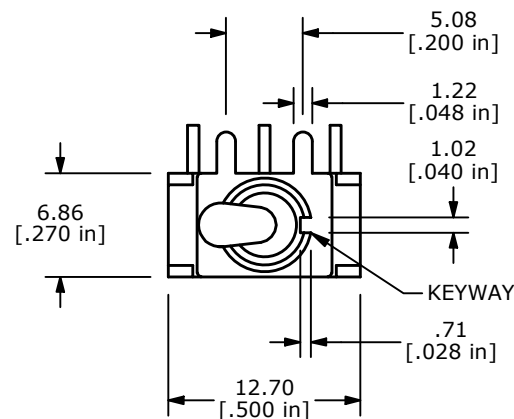

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-10	100 SERIES UPDATE	05/16/2001	MR3	TITLE 100SP1T1B4M6RE				000023880
					SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					2:1	5/31/2001	CJB	T111068	B