Fulcrum cut templates


Print at 100% (“Actual size”, not “Fit to page”). Trace each piece onto corrugated cardboard, or glue the paper on, and cut with a sharp blade against a ruler: a few light passes, not one hard one.



This bar is 5 cm. Measure it; if it isn’t, reprint at 100%.


Base · 52 × 16 cm · cut 1

Too big for paper: measure and cut it directly. Any corrugation direction.

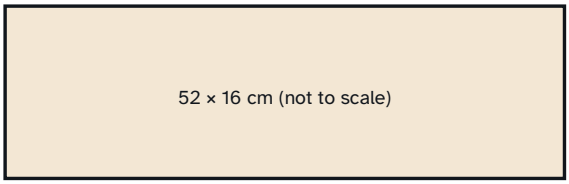



Track · 44 × 7 cm · cut 1


Measure and cut directly. The ridges inside the cardboard must run along the 44 cm length.

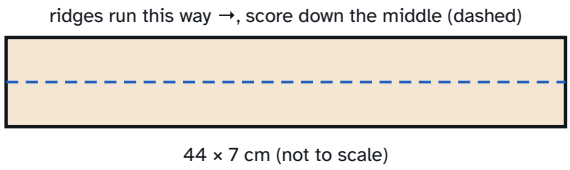


Saddle · cut 4 · each notch hugs the V

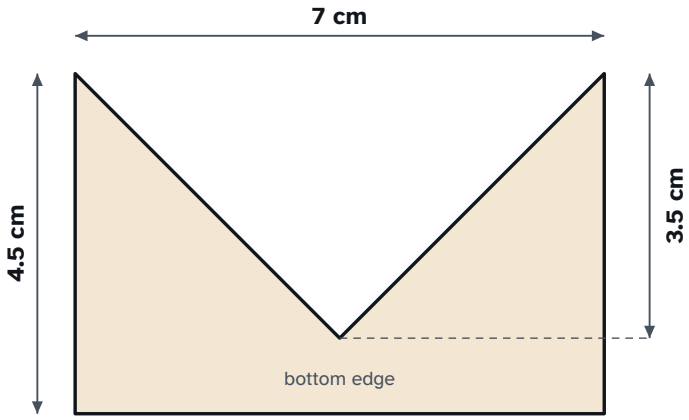

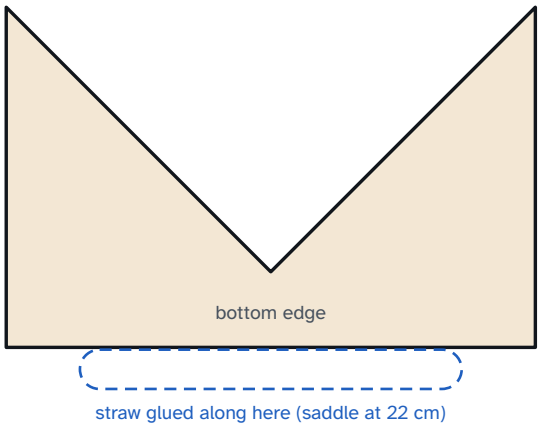

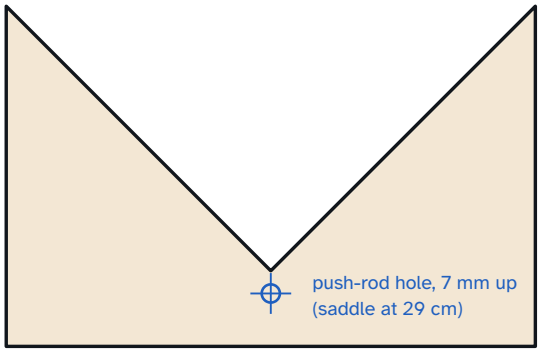

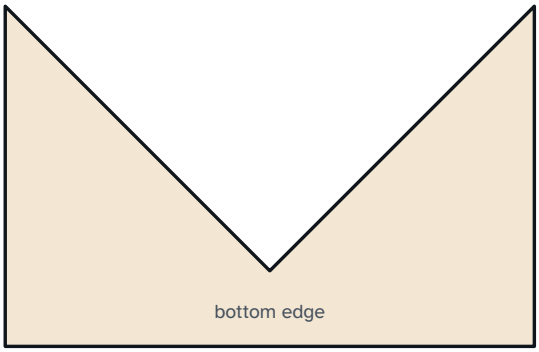

- Saddles go under the track at 5, 22, 29 and 39 cm from the sonar end.
- The one at 22 cm carries the straw; the one at 29 cm gets the push-rod hole.


Towers and braces

Ridges run up and down in the towers. Poke the skewer holes with the skewer itself so they fit snugly.




This bar is 5 cm. Measure it; if it isn't, reprint at 100%.

Tower · trace it twice, cut 2

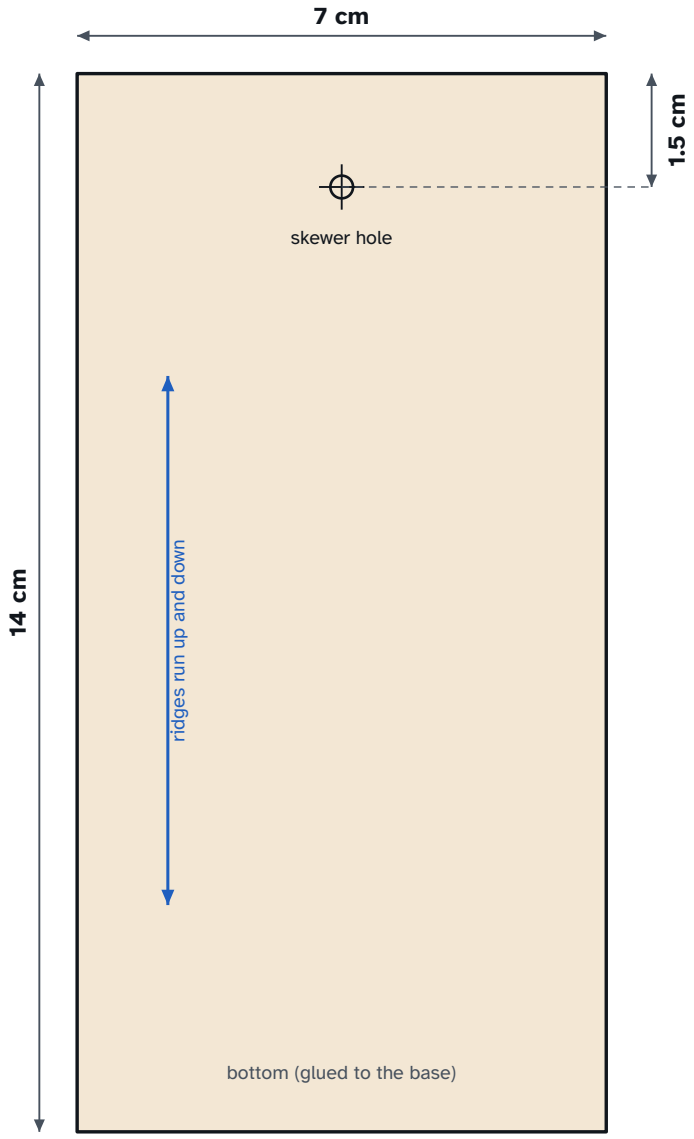

Tower braces · cut this 5 × 9 cm rectangle corner to corner

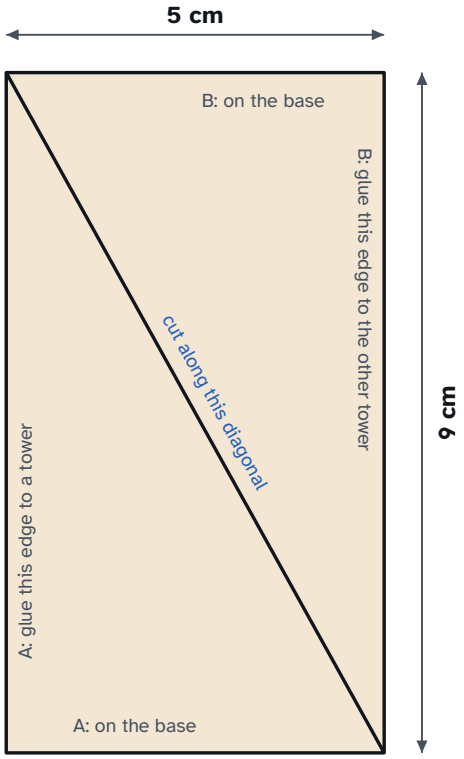


End plates and servo post

The sonar plate closes the sonar end of the track; the far wall closes the other end.




This bar is 5 cm. Measure it; if it isn't, reprint at 100%.


Sonar plate · cut 1

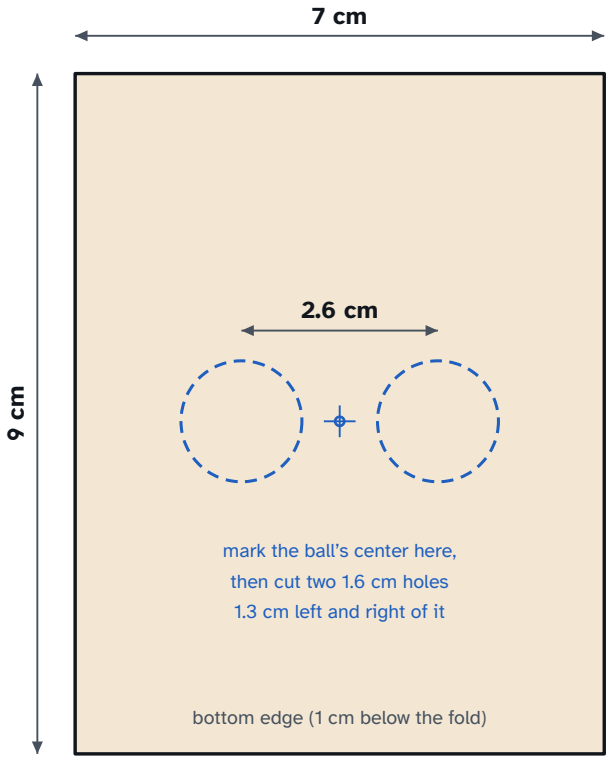

Far wall · cut 1

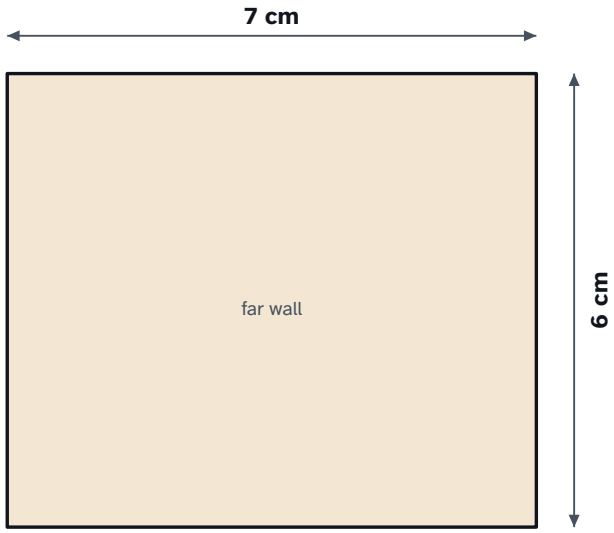

Servo post · cut 1

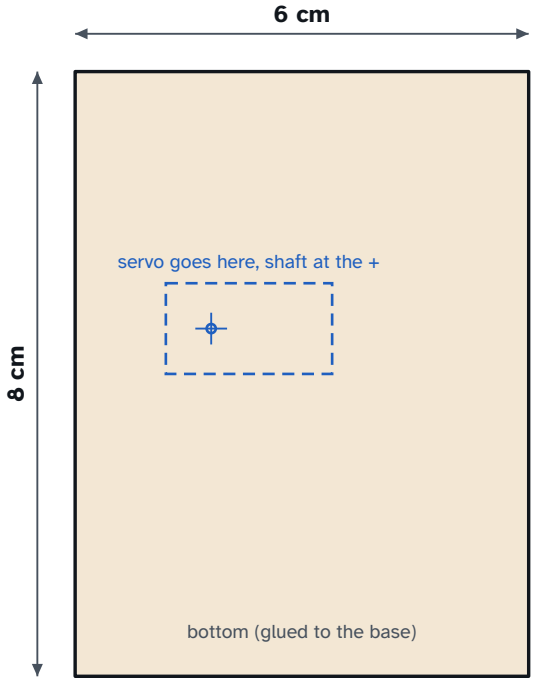

Post brace · cut 1 · right triangle, 4 × 6 cm

