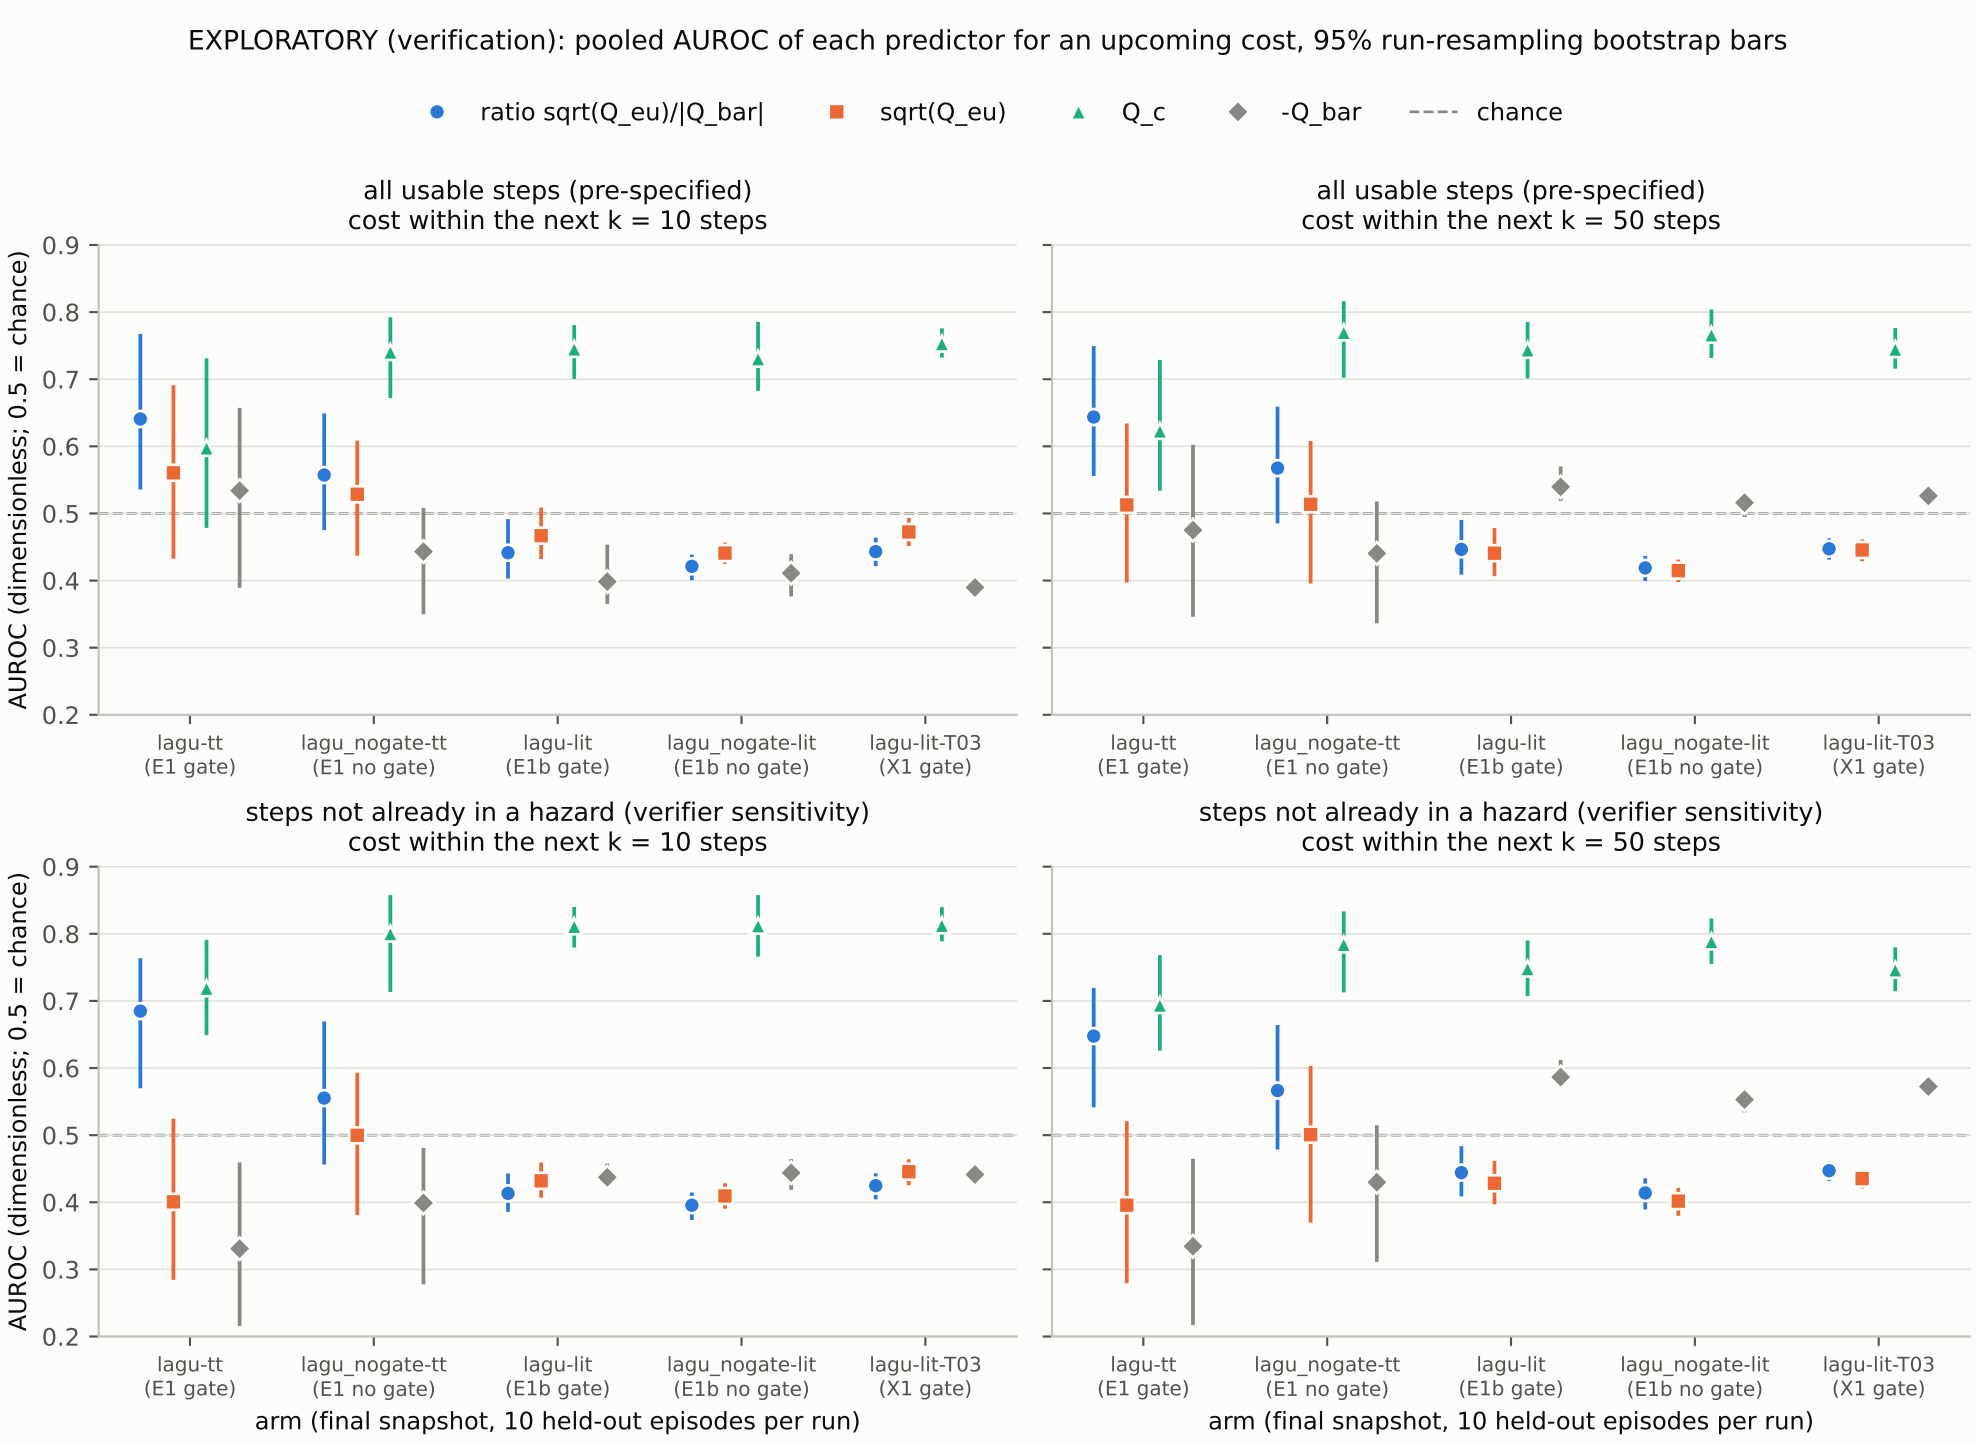
EXPLORATORY (verification): pooled AUROC of each predictor for an upcoming cost, 95% run-resampling bootstrap bars
ratio sqrt(Q_eu)/|Q_bar|
sqrt(Q_eu)
Q_c
-Q_bar
chance
all usable steps (pre-specified)
cost within the next k = 10 steps
all usable steps (pre-specified)
cost within the next k = 50 steps
steps not already in a hazard (verifier sensitivity)
cost within the next k = 10 steps
steps not already in a hazard (verifier sensitivity)
cost within the next k = 50 steps
AUROC (dimensionless; 0.5 = chance)
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
lagu-tt (E1 gate)
lagu_nogate-tt (E1 no gate)
lagu-lit (E1b gate)
lagu_nogate-lit (E1b no gate)
lagu-lit-T03 (X1 gate)
arm (final snapshot, 10 held-out episodes per run)