SWITCHMODE™ Power Rectifiers

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state–of–the–art devices have the following features:

- Ultrafast 25, 50 and 75 Nanosecond Recovery Times
- 175°C Operating Junction Temperature
- Low Forward Voltage
- Low Leakage Current
- High Temperature Glass Passivated Junction
- Reverse Voltage to 600 Volts

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16″ from case
- Shipped in plastic bags, 1000 per bag
- Available Tape and Reeled, 5000 per reel, by adding a “RL” suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: U120, U140, U160



MUR120
MUR140
MUR160

MUR120, MUR140 and MUR160 are Motorola Preferred Devices

ULTRAFAST RECTIFIERS
1.0 AMPERE
200–400–600 VOLTS



CASE 59–04
PLASTIC

MAXIMUM RATINGS

Rating	Symbol	MUR 120	MUR 140	MUR 160	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	400	600	Volts
Average Rectified Forward Current (Square Wave Mounting Method #3 Per Note 1)	$I_{F(AV)}$	1.0 @ T_A = 130°C	1.0 @ T_A = 120°C		Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, single phase, 60 Hz)	I_{FSM}	35			Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	– 65 to +175			°C

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	See Note 1	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 1.0 Amp, T_J = 150°C) (i_F = 1.0 Amp, T_J = 25°C)	v_F	 0.710 0.875	 1.05 1.25	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 150°C) (Rated dc Voltage, T_J = 25°C)	i_R	 50 2.0	 150 5.0	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1.0 Amp, I_{REC} = 0.25 A)	t_{rr}	 35 25	 75 50	ns
Maximum Forward Recovery Time (I_F = 1.0 A, di/dt = 100 A/μs, I_{REC} to 1.0 V)	t_{fr}	25	50	ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

SWITCHMODE is a trademark of Motorola, Inc.

Preferred devices are Motorola recommended choices for future use and best overall value.

MUR120

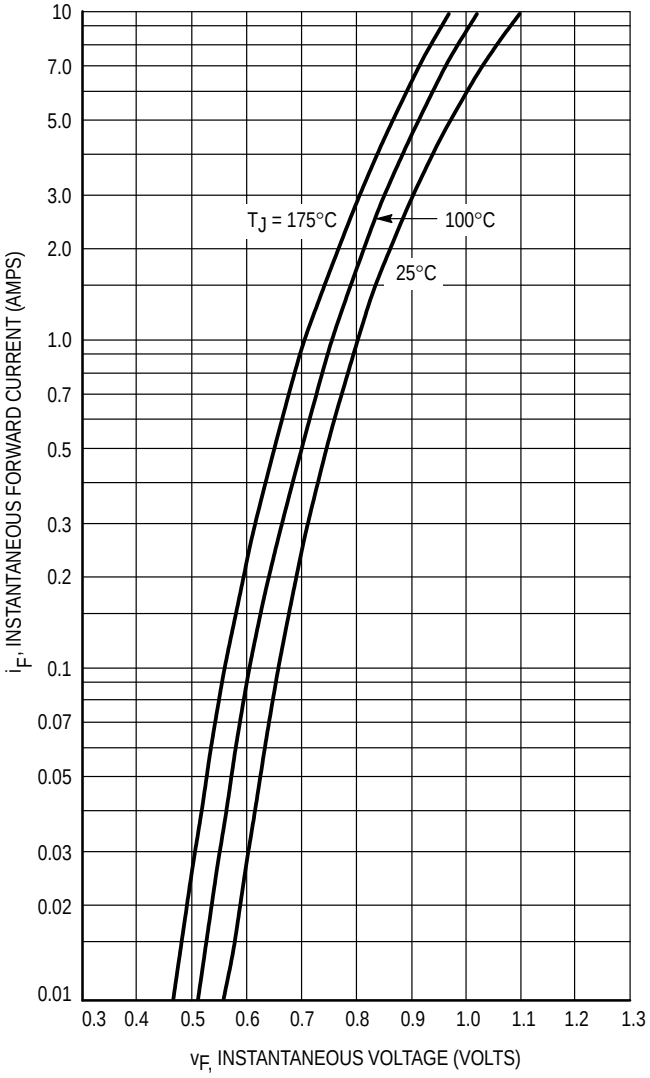

Figure 1. Typical Forward Voltage

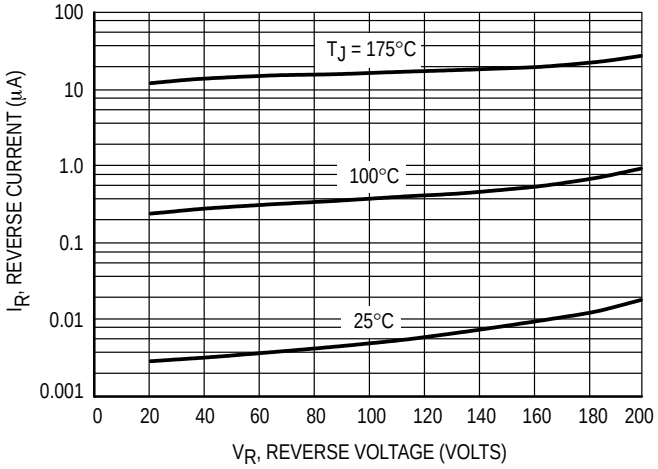

Figure 2. Typical Reverse Current*

* The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R.

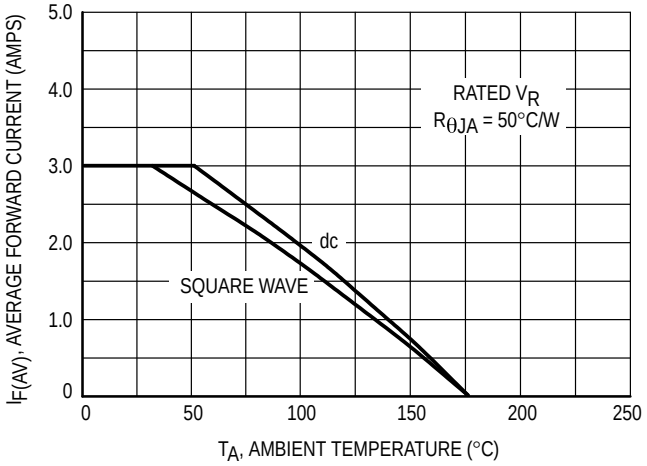

Figure 3. Current Derating (Mounting Method #3 Per Note 1)

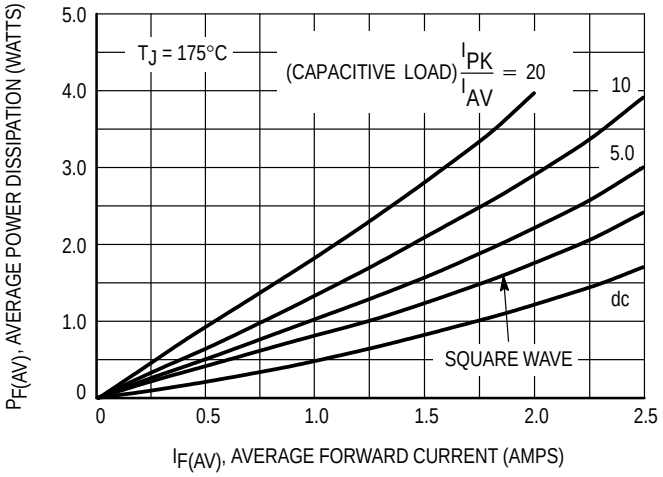

Figure 4. Power Dissipation

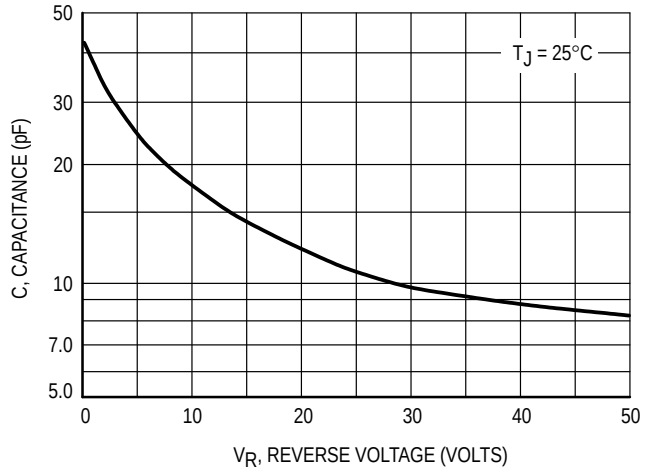

Figure 5. Typical Capacitance

MUR140, MUR160

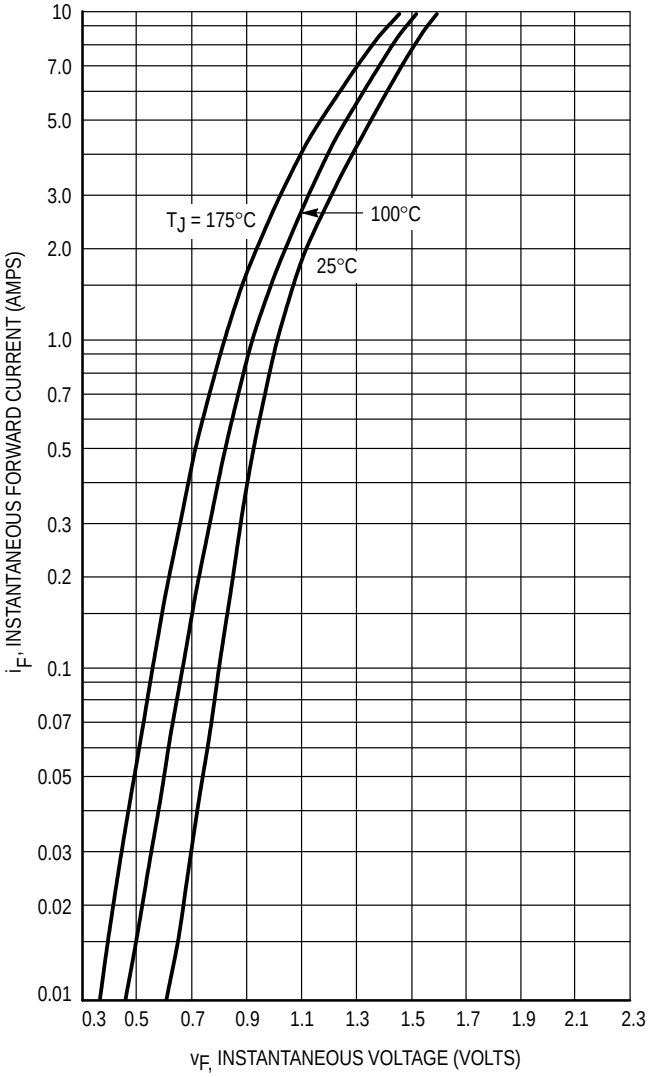

Figure 6. Typical Forward Voltage

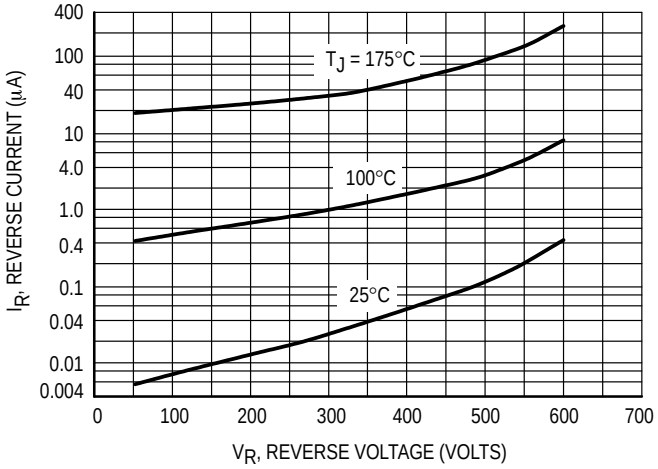

Figure 7. Typical Reverse Current*

* The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R.

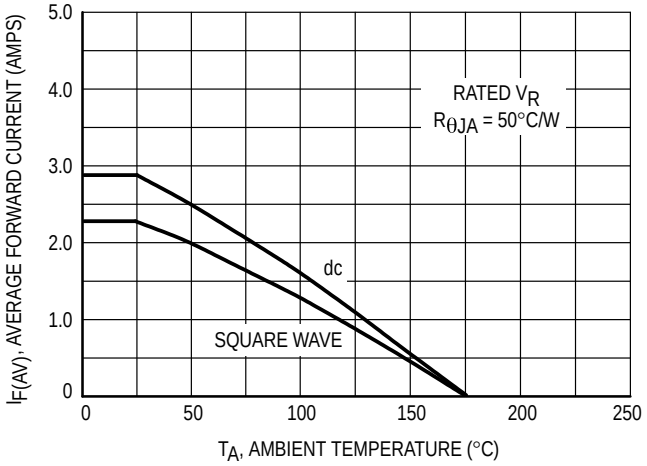

Figure 8. Current Derating (Mounting Method #3 Per Note 1)

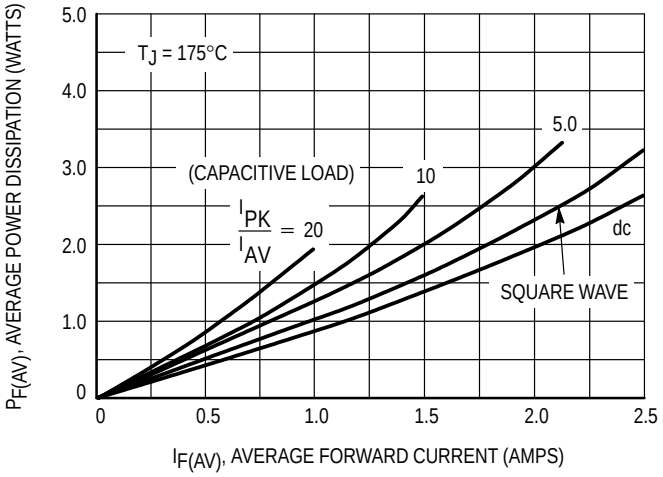

Figure 9. Power Dissipation

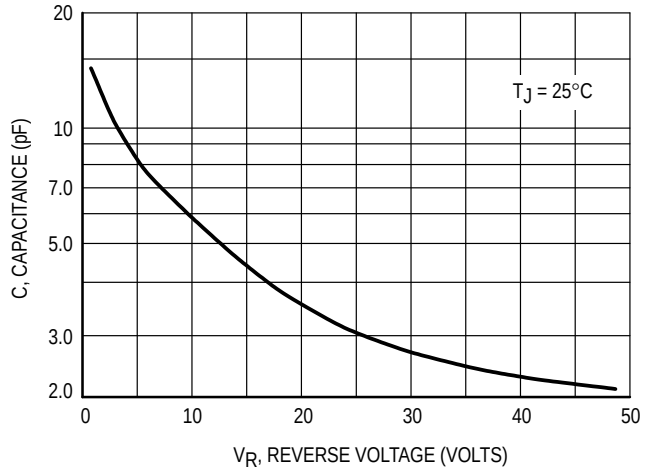

Figure 10. Typical Capacitance

NOTE 1 — AMBIENT MOUNTING DATA

Data shown for thermal resistance junction to ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.

TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

Mounting Method		Lead Length, L			Units
		1/8	1/4	1/2	
1	$R_{\theta JA}$	52	65	72	°C/W
2		67	80	87	°C/W
3		50			°C/W

MOUNTING METHOD 1

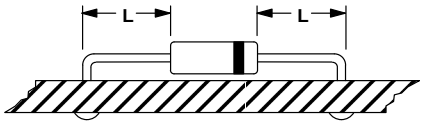

MOUNTING METHOD 2

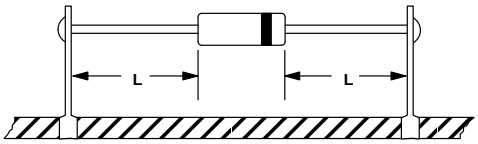

Vector Pin Mounting

MOUNTING METHOD 3

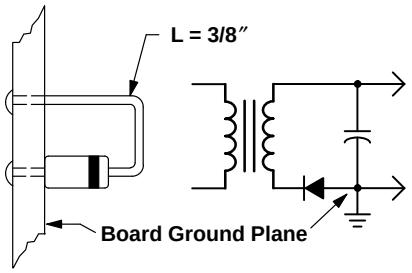

P.C. Board with
1–1/2″ X 1–1/2″ Copper Surface

PACKAGE DIMENSIONS

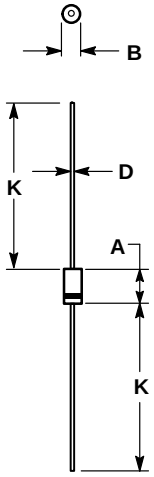

NOTES:
1. ALL RULES AND NOTES ASSOCIATED WITH JEDEC DO–41 OUTLINE SHALL APPLY.
2. POLARITY DENOTED BY CATHODE BAND.
3. LEAD DIAMETER NOT CONTROLLED WITHIN F DIMENSION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	5.97	6.60	0.235	0.260
B	2.79	3.05	0.110	0.120
D	0.76	0.86	0.030	0.034
K	27.94	—	1.100	—

CASE 59–04
ISSUE M

How to reach us:

USA / EUROPE / Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 1–303–675–2140 or 1–800–441–2447

JAPAN: Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4–32–1,
Nishi–Gotanda, Shinagawa–ku, Tokyo 141, Japan. 81–3–5487–8488

Customer Focus Center: 1–800–521–6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1–602–244–6609
Motorola Fax Back System – US & Canada ONLY 1–800–774–1848
– http://sps.motorola.com/mfax/

ASIA / PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298

HOME PAGE: http://motorola.com/sps/