
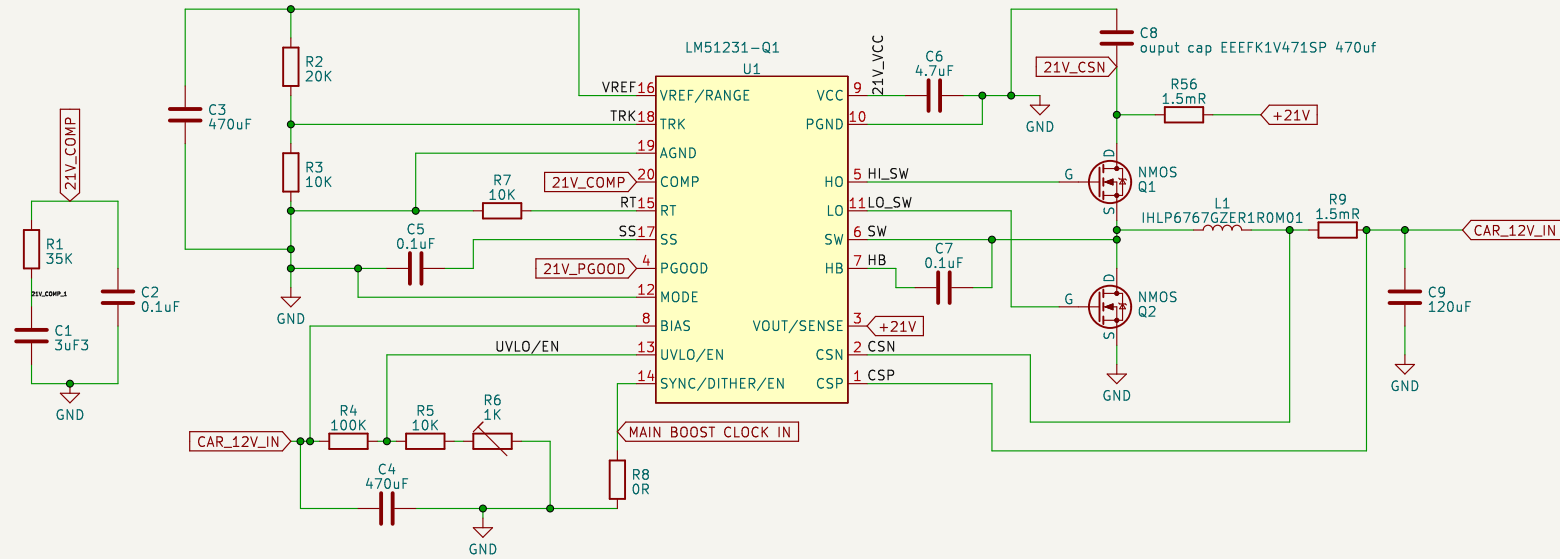


2mhz switching freq

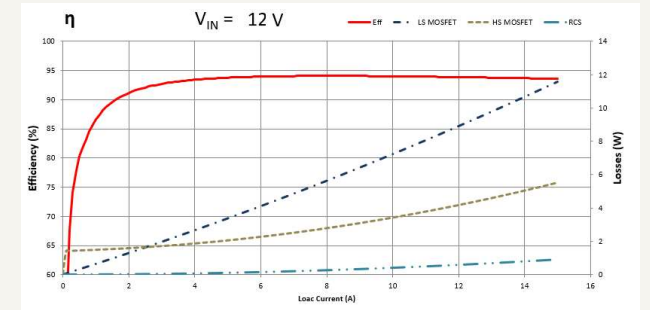


Sheet: /12-21V INPUT BOOST CONVERTER/
File: untitled.kicad_sch

Title:


Size: A4
KiCad E.D.A. kicad 7.0.2

Date:

Rev:
Id: 2/14

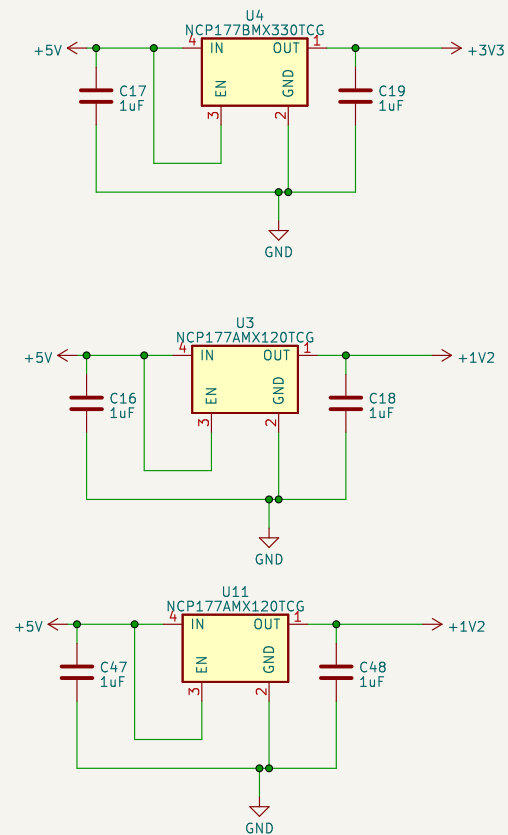

Rev:
Id: 3/14

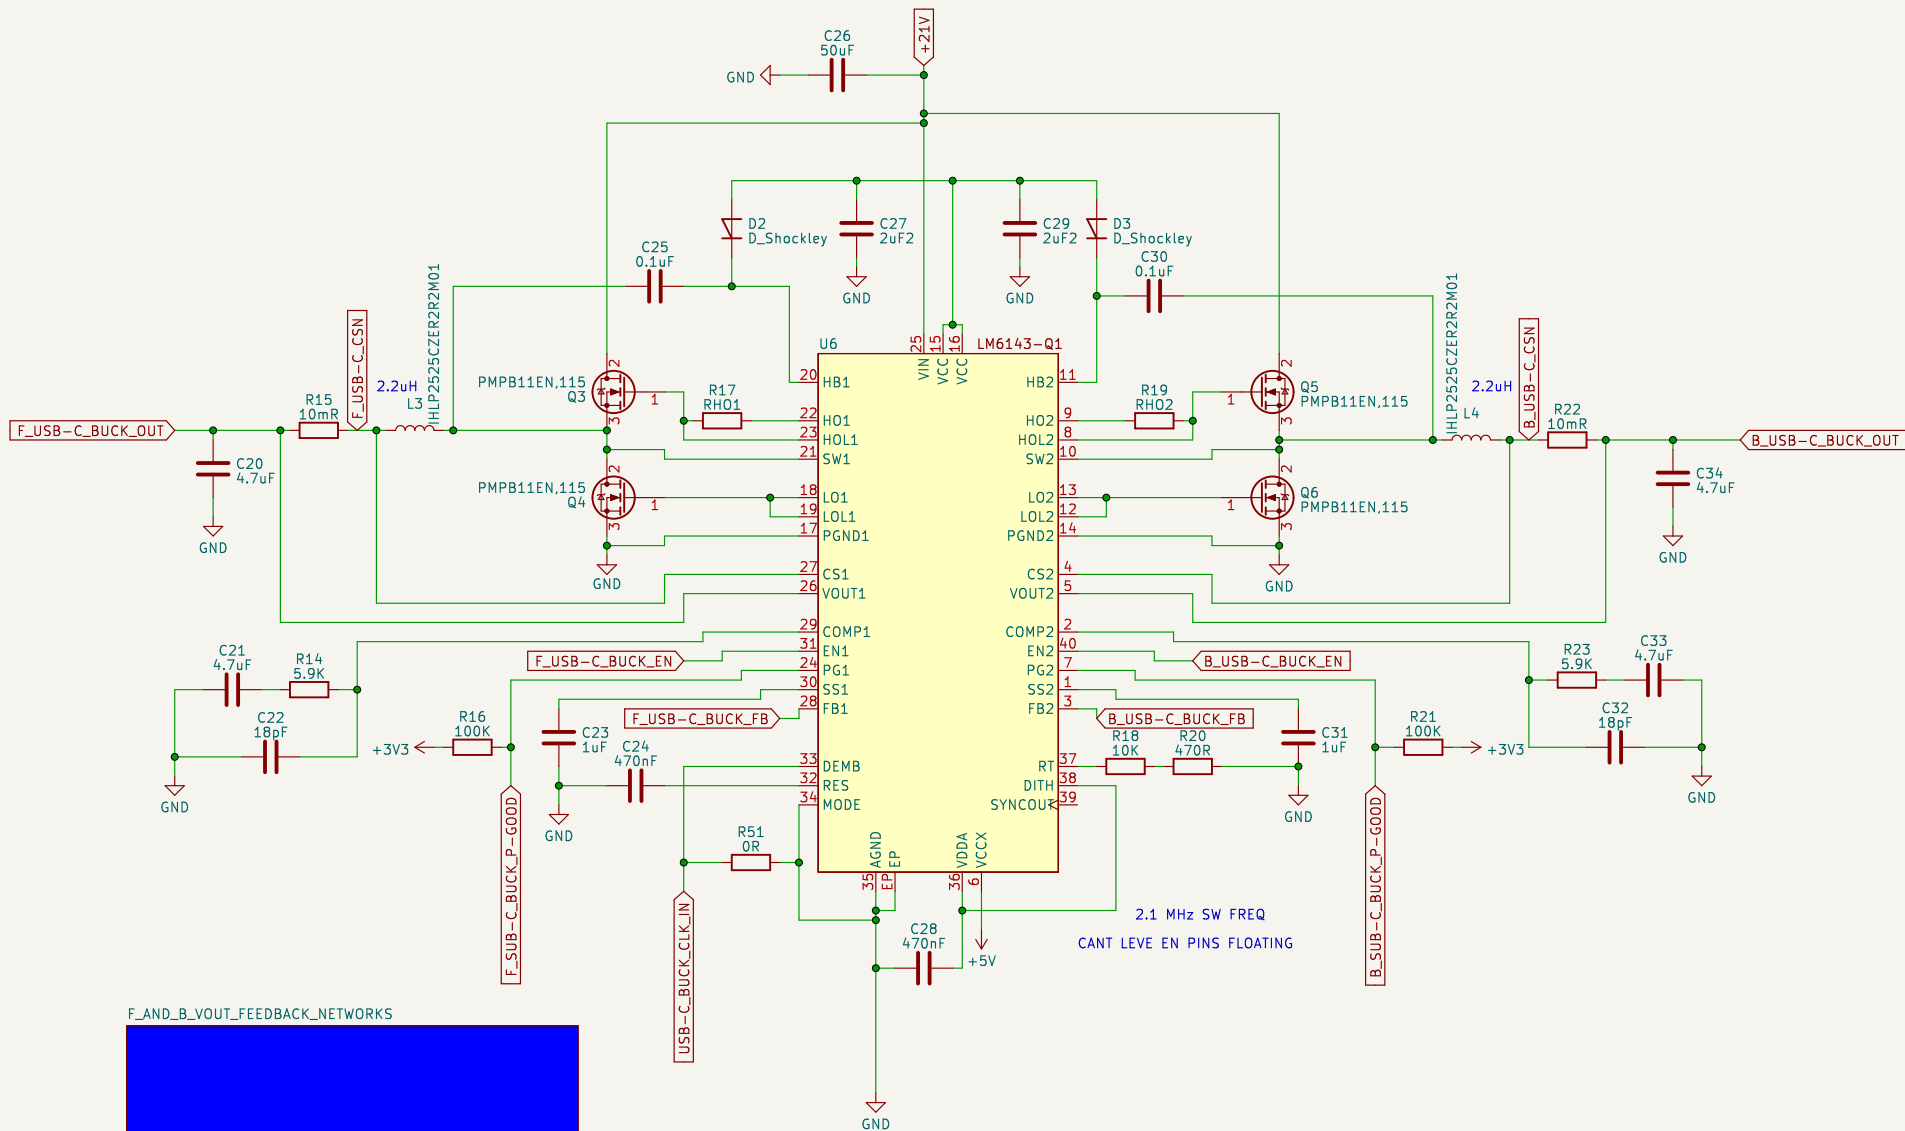

F_AND_B_VOUT_FEEDBACK_NETWORKS

File: F_AND_B_VOUT_FEEDBACK_NETWORKS.kicad_sch

Sheet: /USB-C_POWER/
File: FRONT USB-C POWER.kicad_sch

Title:

Size: A4


Date:

KiCad E.D.A. kicad 7.0.2


Rev:

Id: 4/14

FRONT USB-C BUCK SELECTABLE FEEDBACK NETWORK

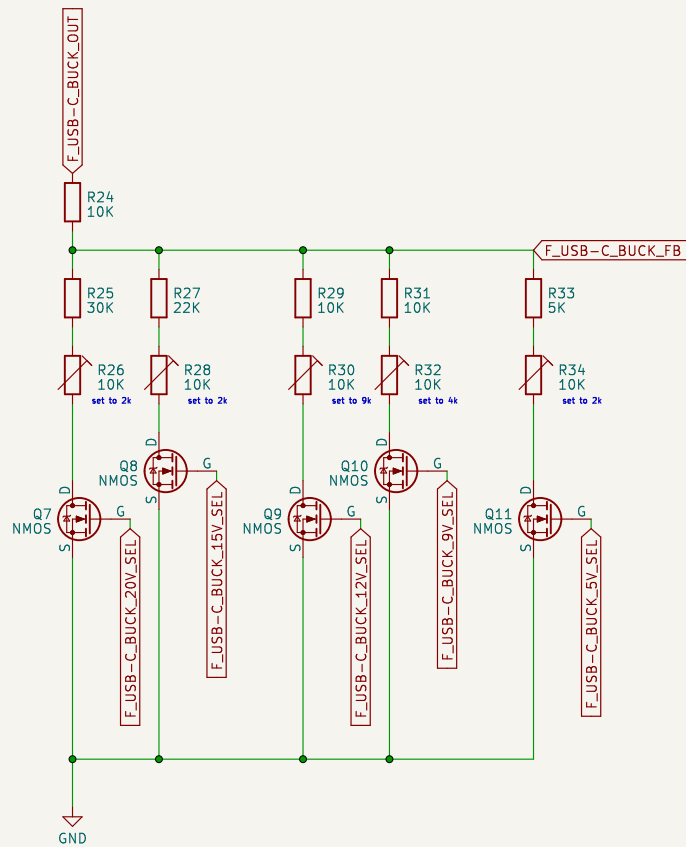

BACK USB-C BUCK SELECTABLE FEEDBACK NETWORK

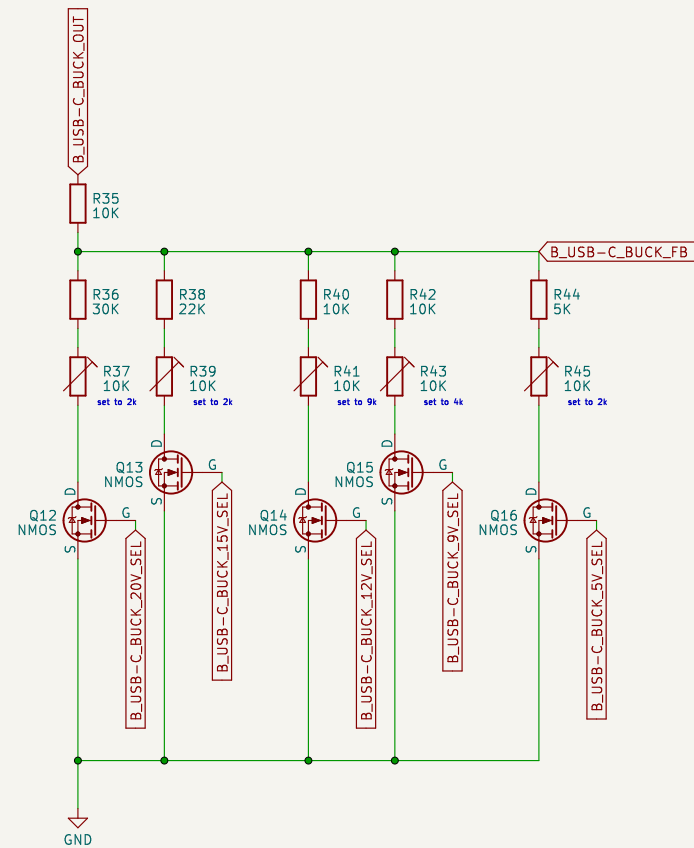

Sheet: /USB-C_POWER/F_AND_B_VOUT_FEEDBACK_NETWORKS/
File: F_AND_B_VOUT_FEEDBACK_NETWORKS.kicad_sch

Title:







Size: A4

Date:

KiCad E.D.A. kicad 7.0.2

Rev:

Id: 5/14

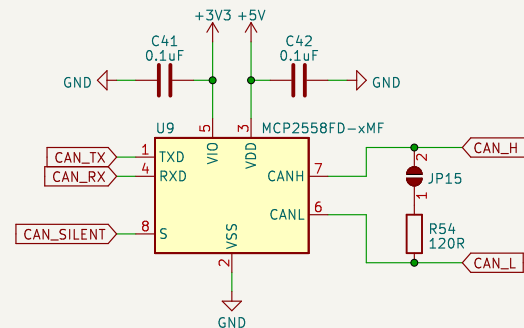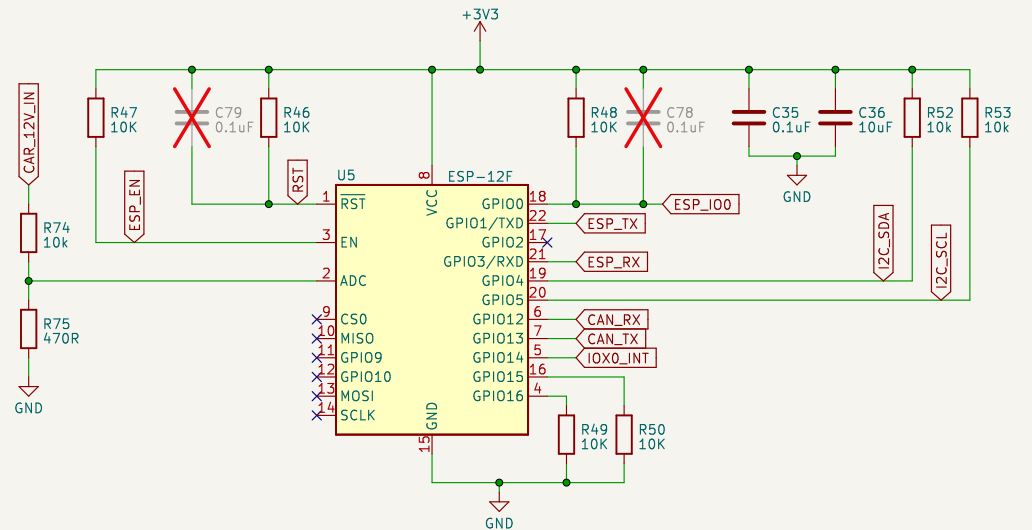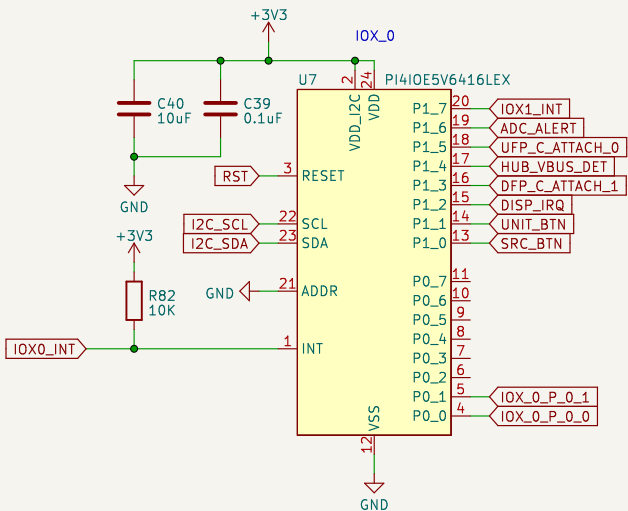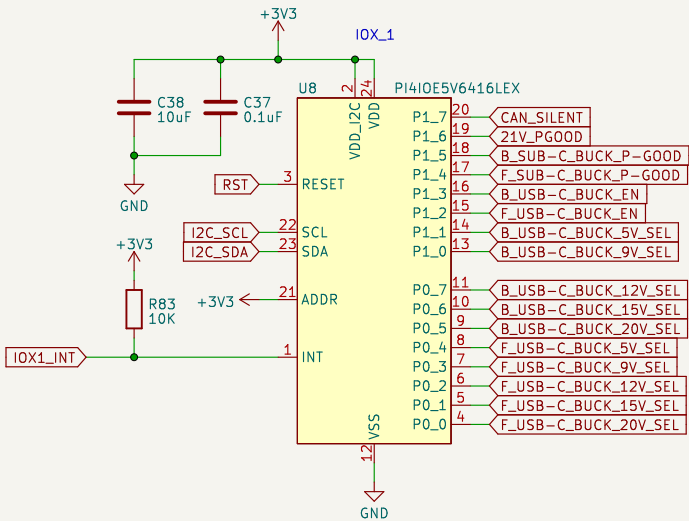

I THINK THE I2C PULLUPS SHOULD BE 2K2 BUT THE USB HUB SPECS THEM FOR 10K AND SAYS ITL HANG IF IT DOESNT SEE 10K SO I HOPE THIS ALLOWS THE BUS TO OPERATE PROPERLY



Sheet: /ESP-12F/
File: ESP-12F.kicad_sch


Title:


Size: A4
KiCad E.D.A. kicad 7.0.2

Date:

Rev:
Id: 6/14

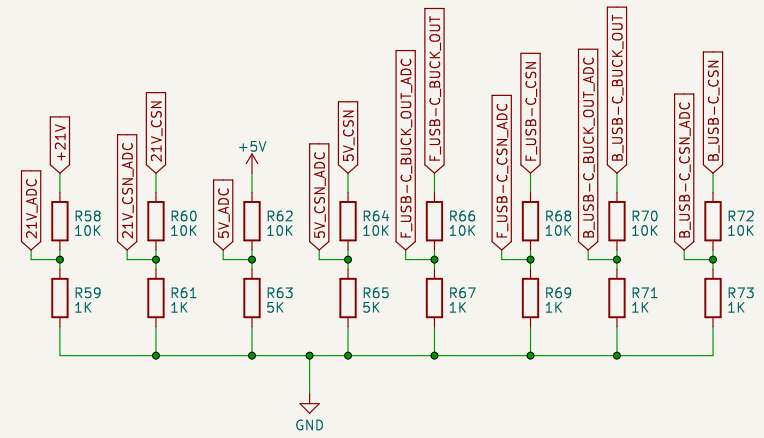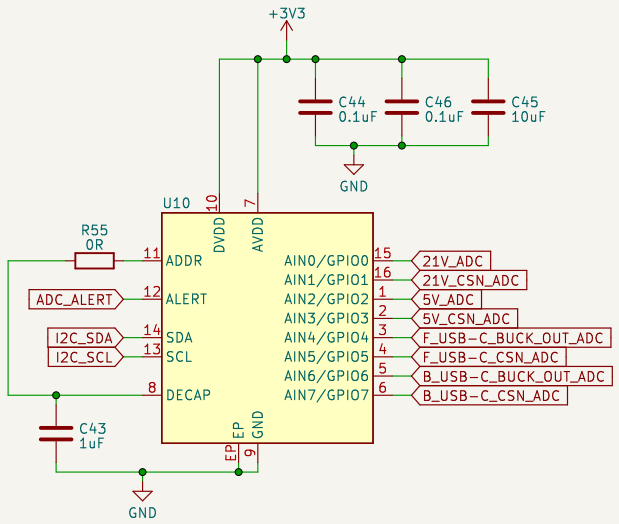

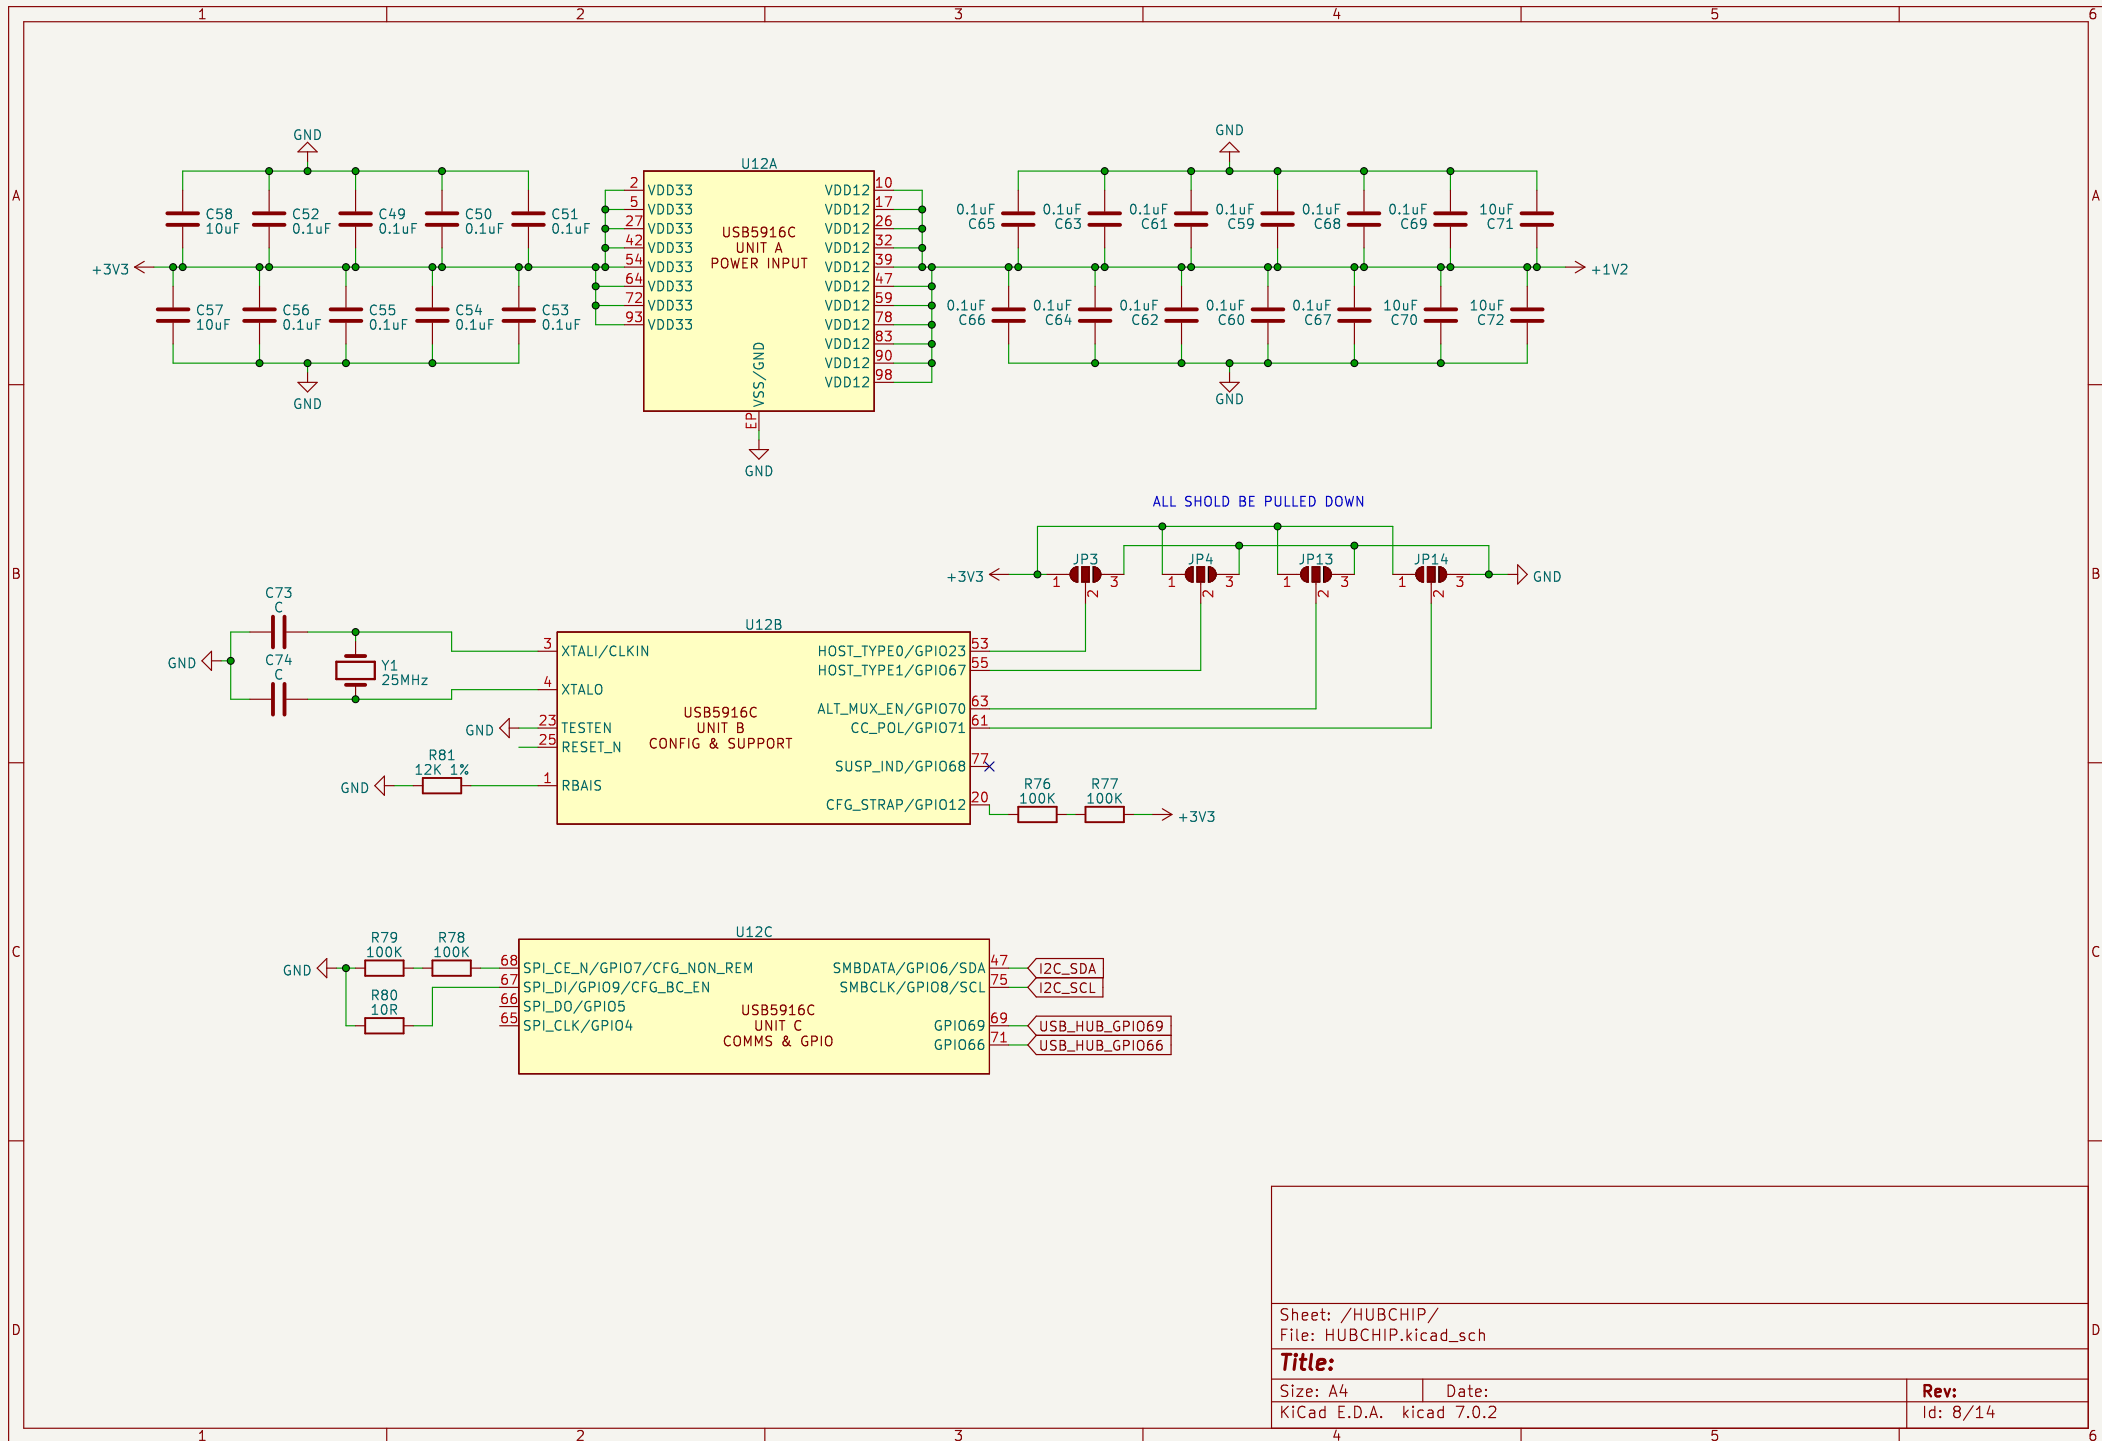

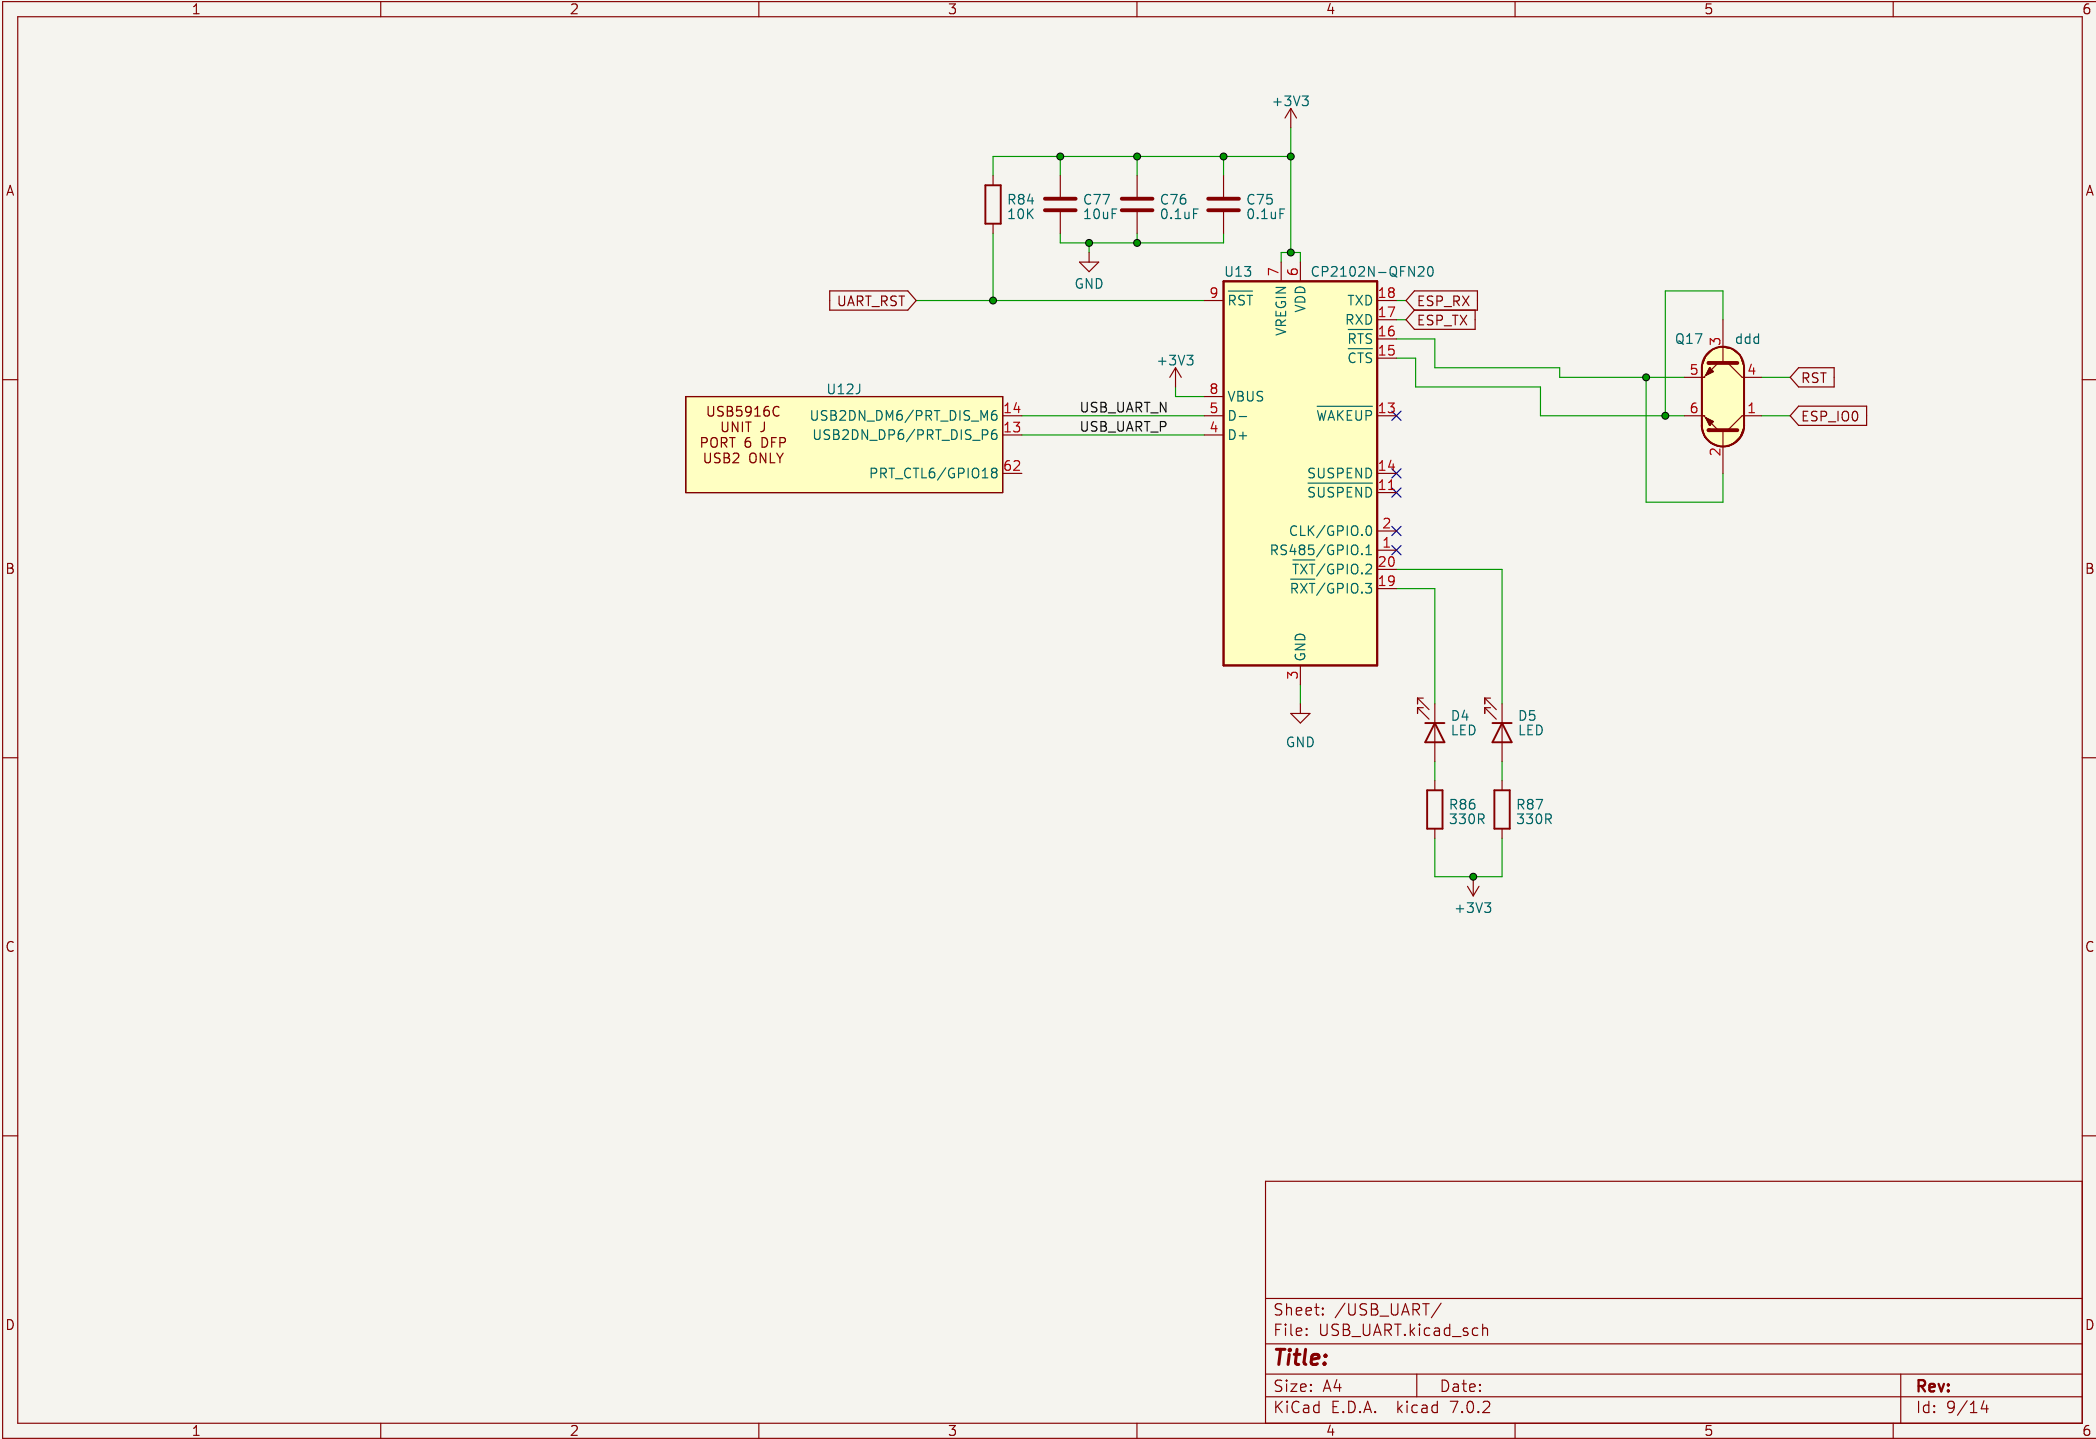


Sheet: /USB_UART/
File: USB_UART.kicad_sch

Title:

Size: A4
KiCad E.D.A. kicad 7.0.2

Date:

Rev:
Id: 9/14

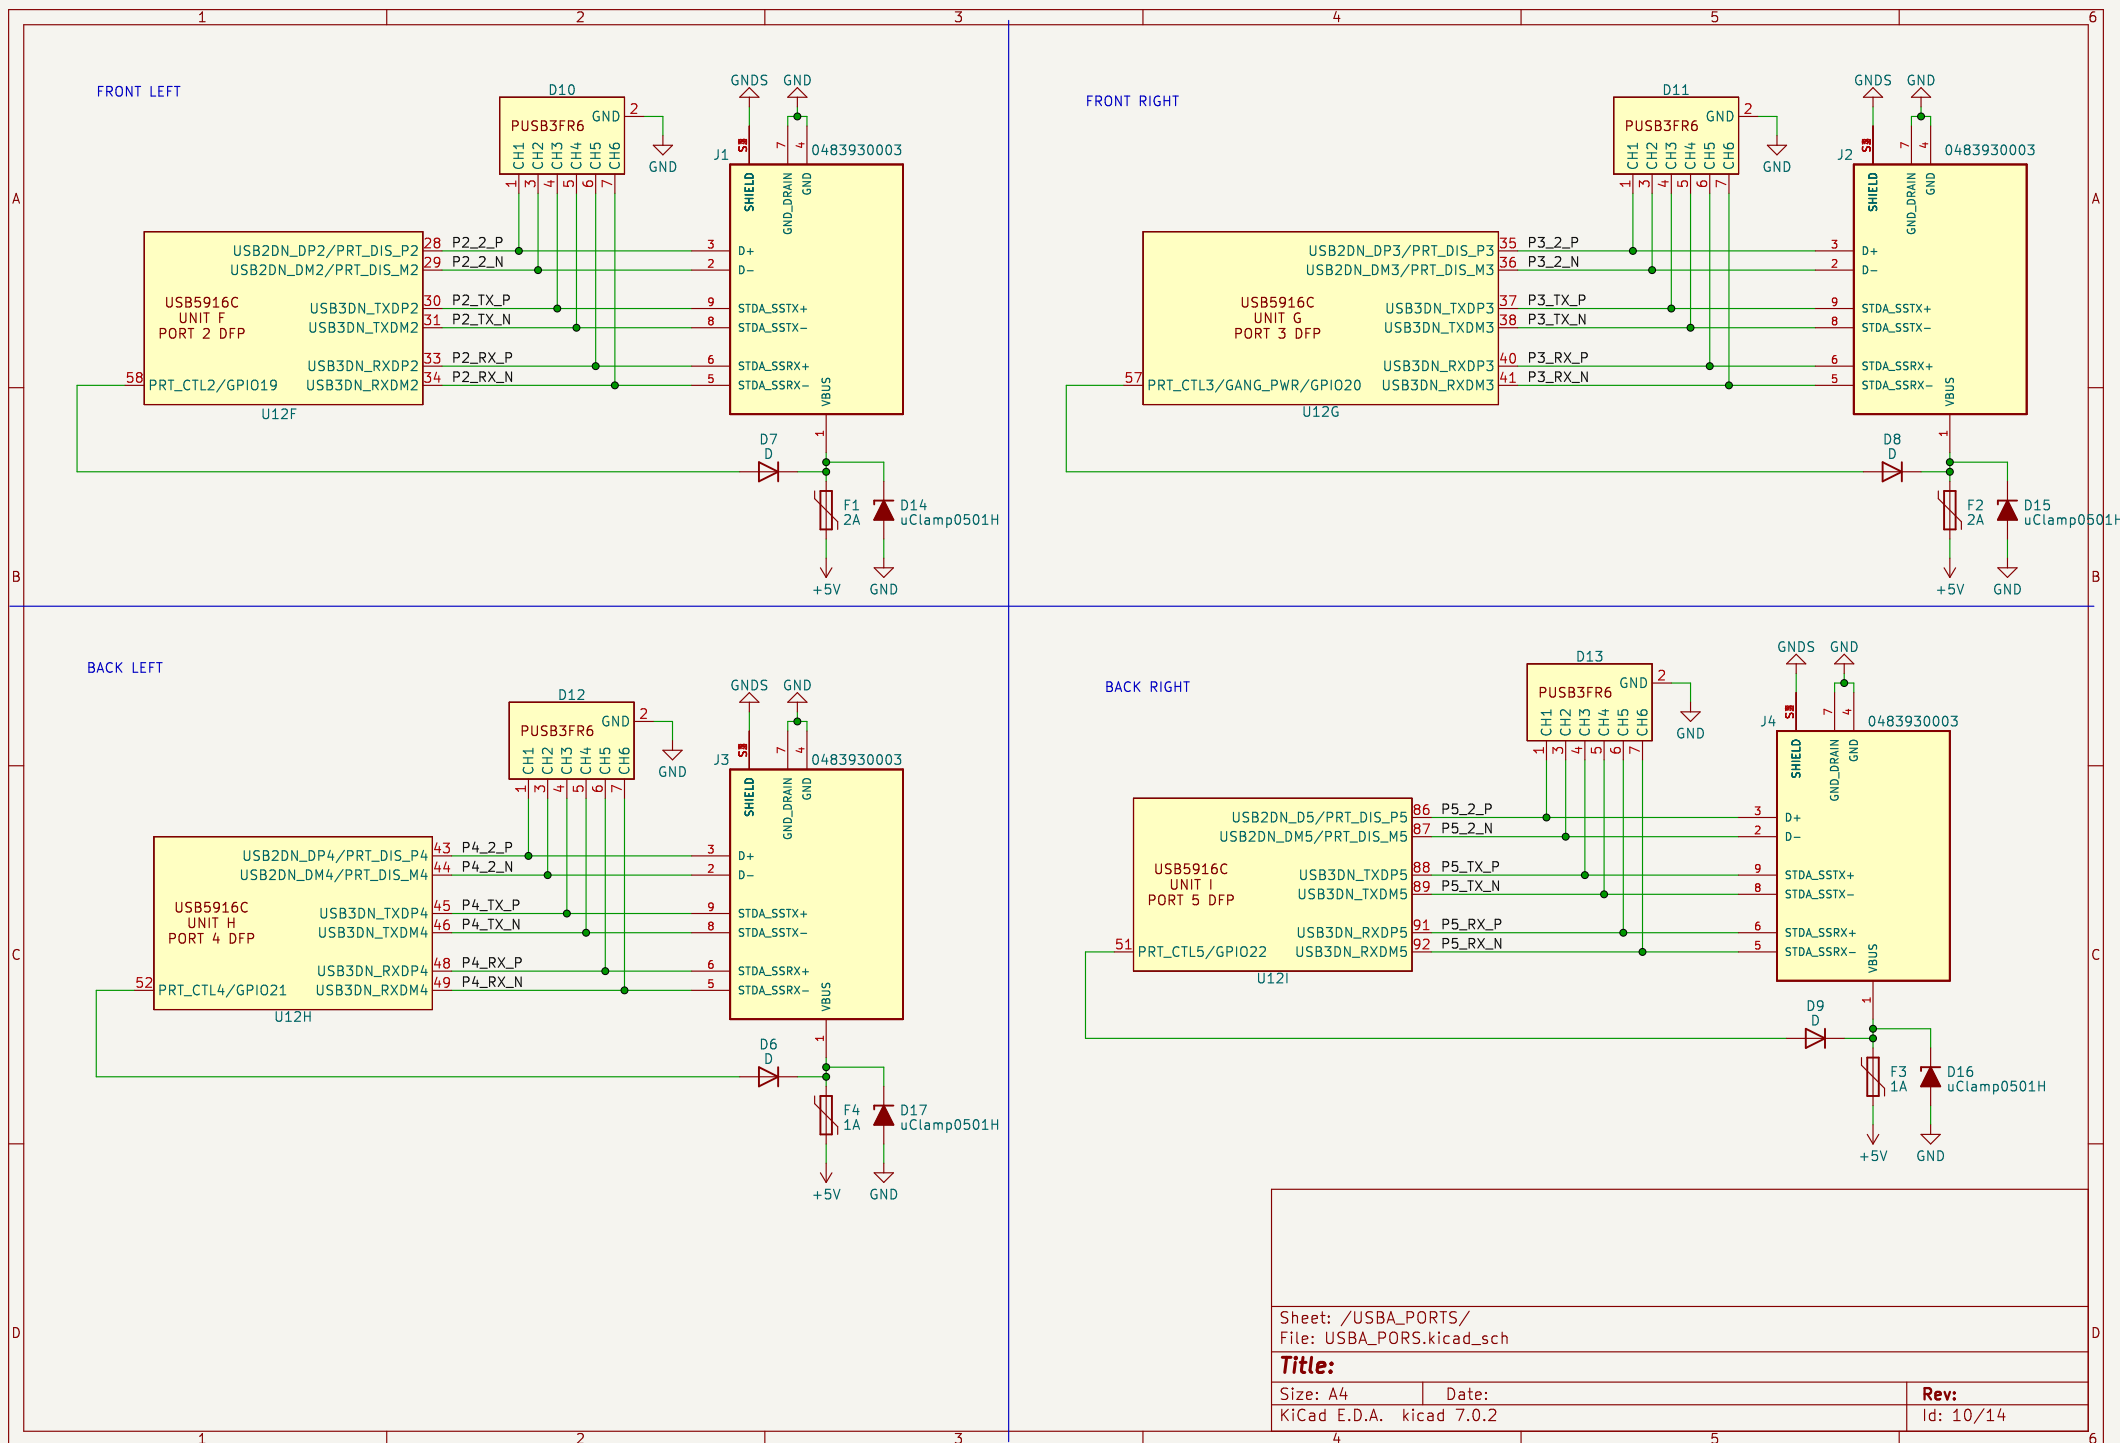

Sheet: /USBA_PORTS/
File: USBA_PORS.kicad_sch


Title:


Size: A4
KiCad E.D.A. kicad 7.0.2





Date:

Rev:

Id: 10/14

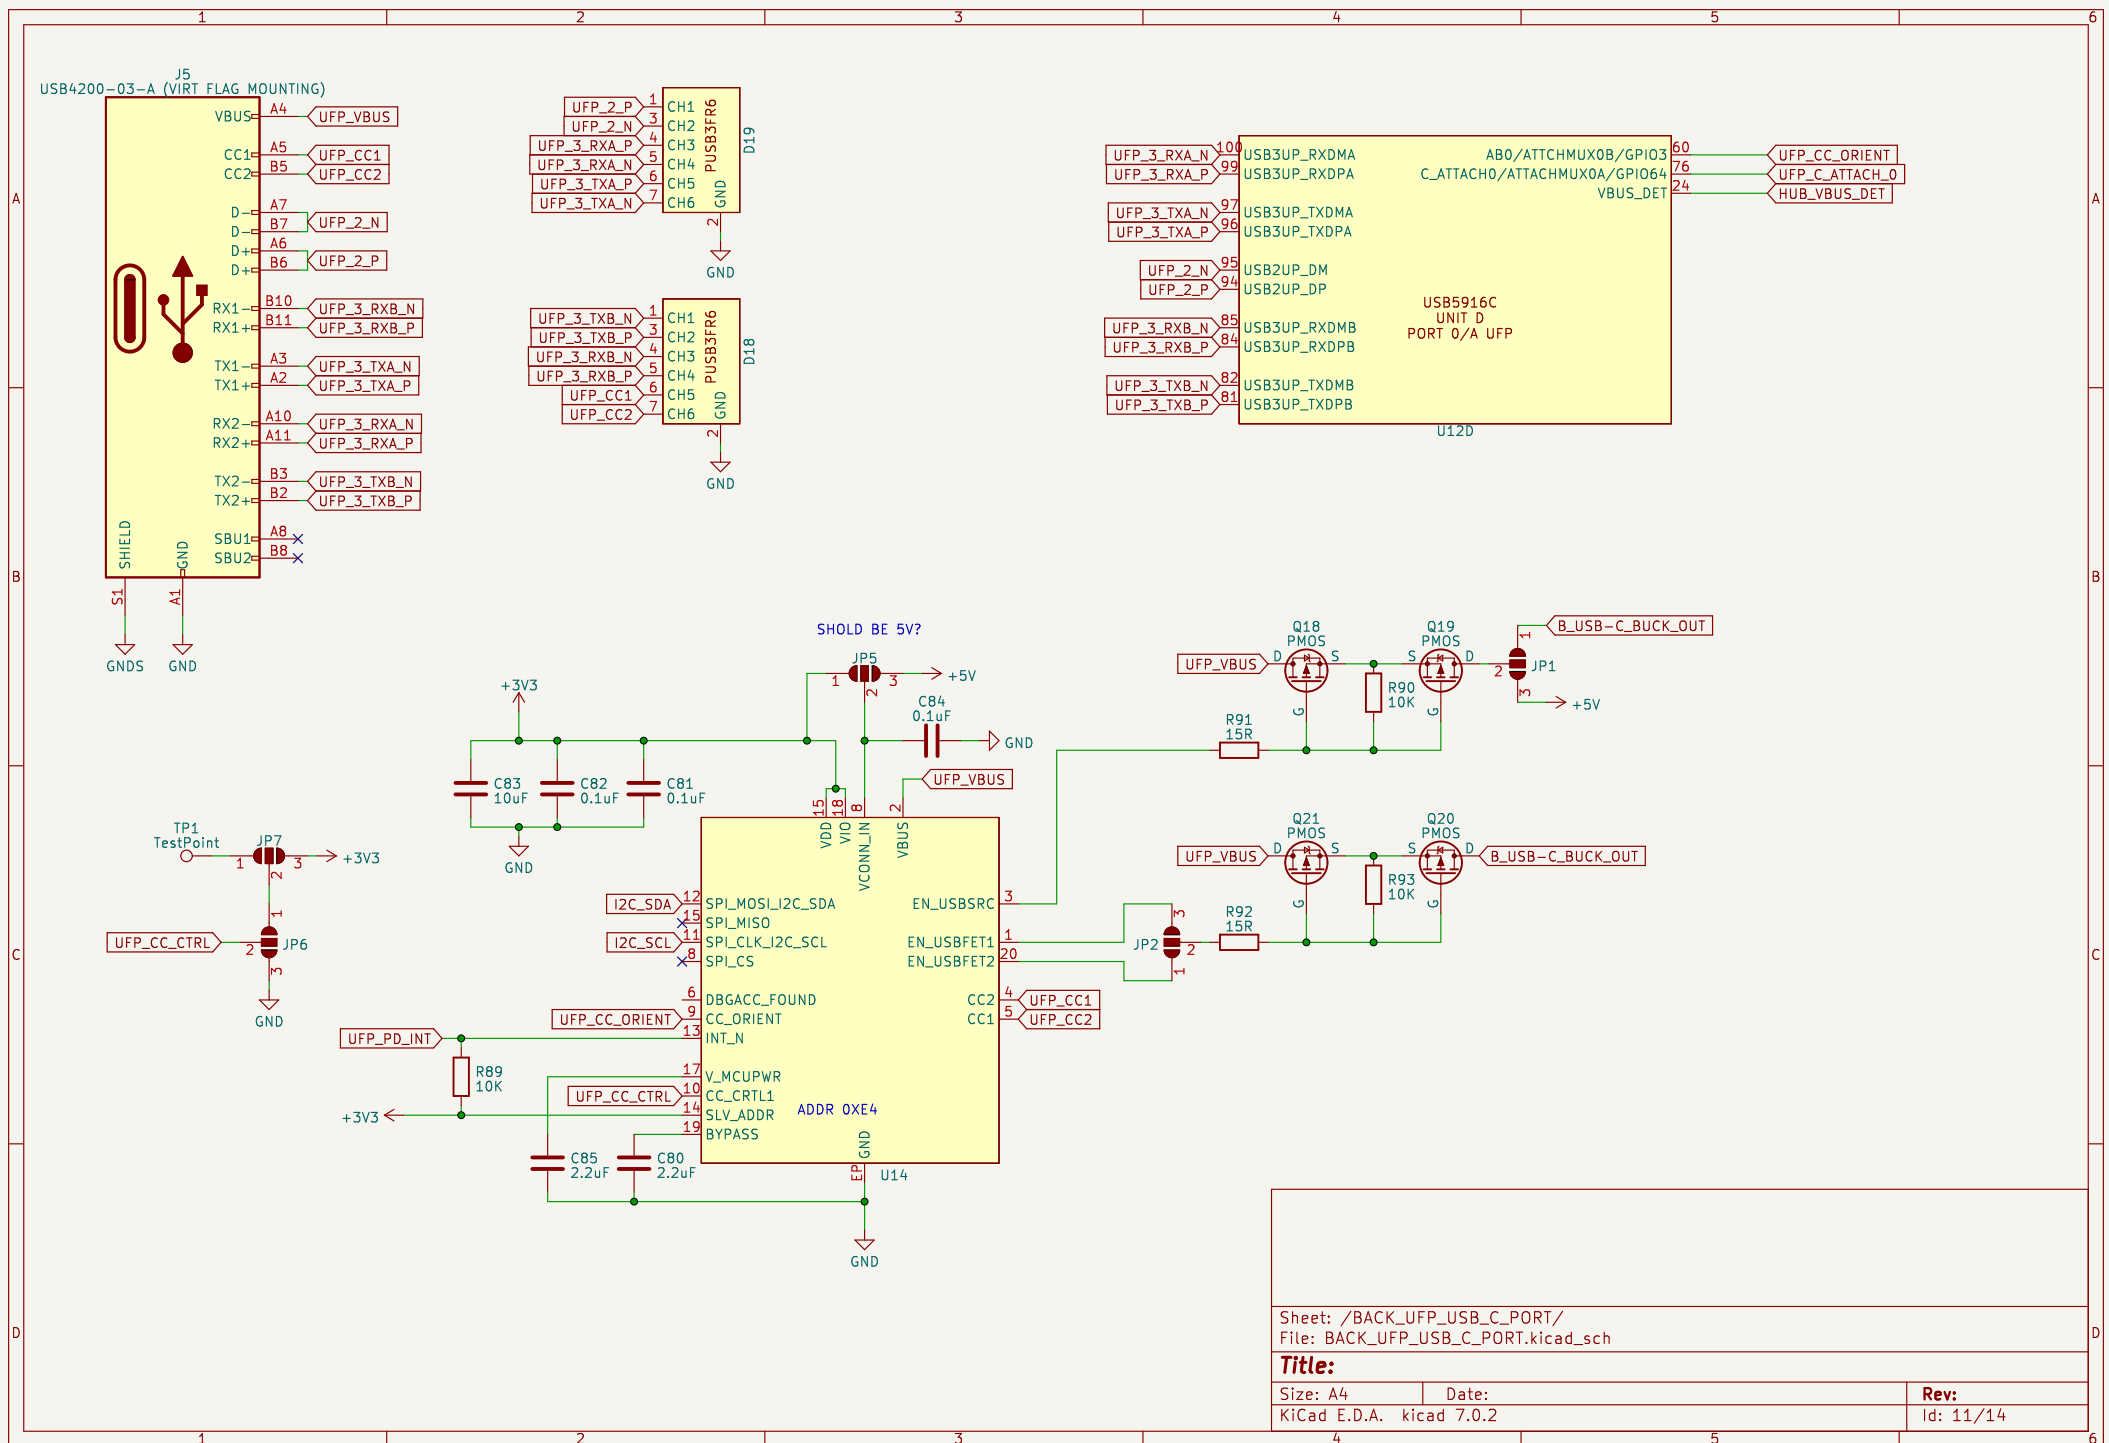

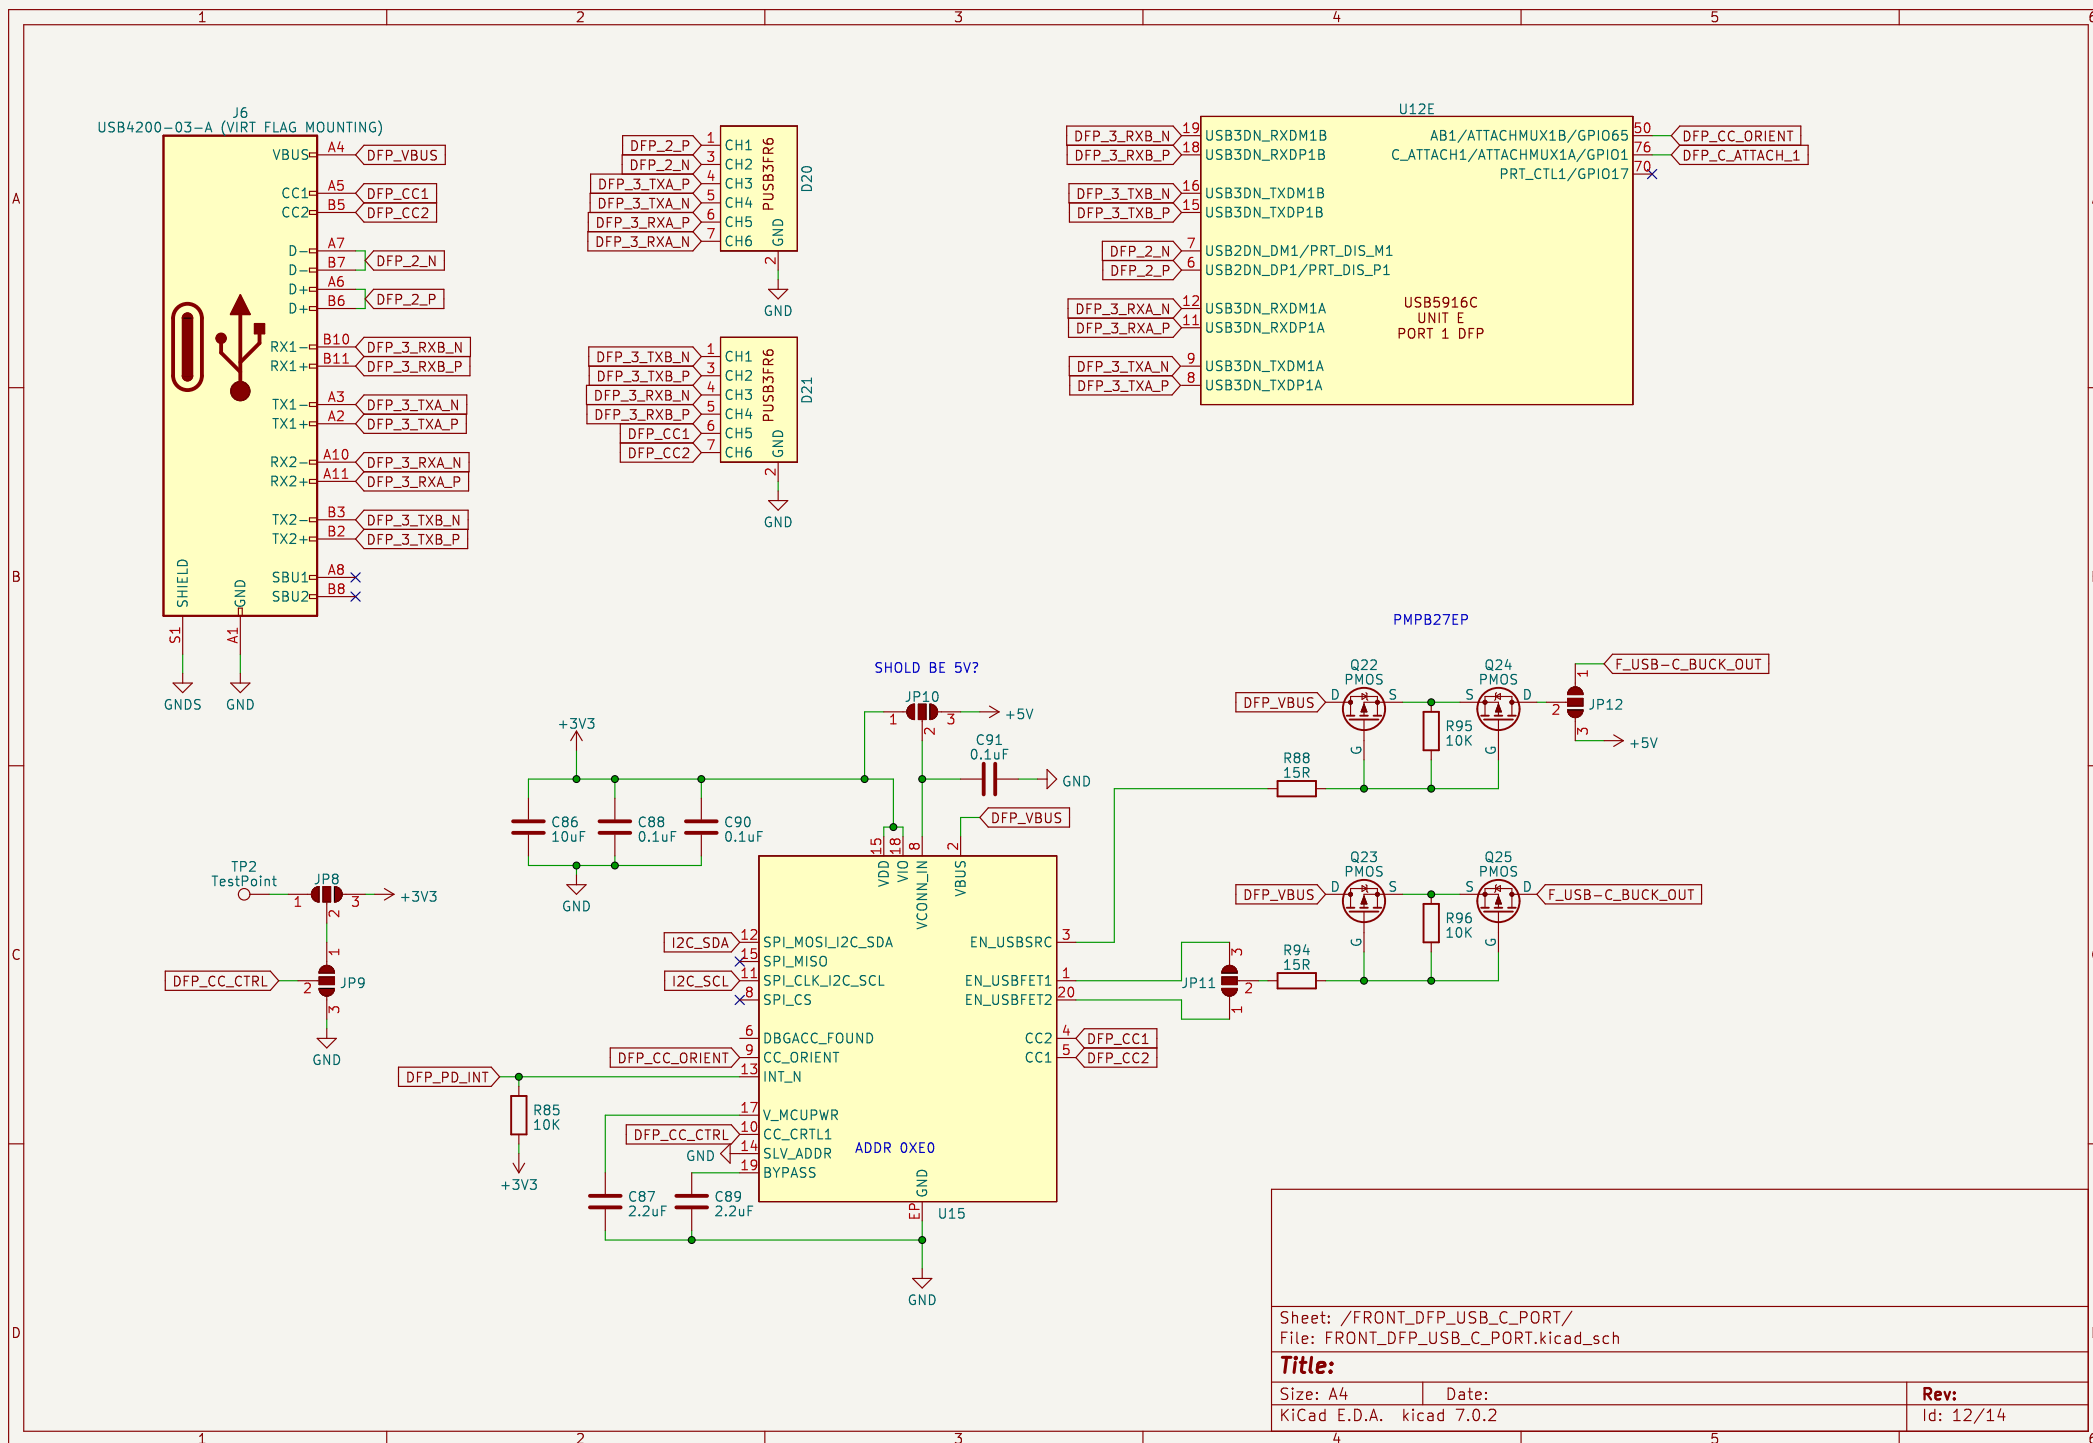

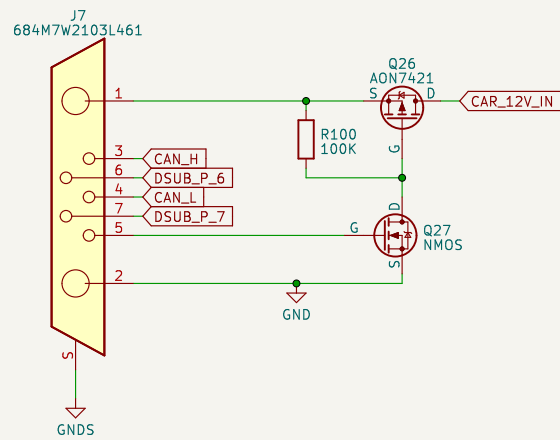

Sheet: /CAR_12V_IN/
File: CAR_12V_IN.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. kicad 7.0.2

Rev:

Id: 14/14