中国建材 | 中复神鹰

TECHNICAL DATA SHEET

Zhongfu Shenying Carbon Fiber

SYT49S-24K



TECHNICAL DATA SHEET

SYT49S-24K	Metric		English		Test Method	Note
Tensile Strength	4900	MPa	710	Ksi	GB/T 3362	Inspection standards can be implemented according to customer requirements
Elastic Modulus	240	GPa	34.8	Msi	GB/T 3362	
Elongation at Break	1.8	%	1.8	%	GB/T 3362	
Density	1.80	g/cm³	0.065	lbs/in³	GB/T 30019	
Linear Density	1600	g/km	3724	ft/lbs	GB/T 3362	
Sizing Type	Epoxy					
Twist	Never twisted					


APPLICATION FIELD

The SYT49S-24K carbon fibers applications involve aerospace, wind turbine blade, carbon/carbon composites, pressure vessel, leisure sports, Architecture & bridge, rail transit, automobile industry, carbon core cable, electronic product, medical and other fields.

PACKAGING

The table below summarizes the standard packaging;
other bobbin sizes can be supplied to satisfy special needs.

Filament Count	Bobbin (Net weight kg)	Bobbin Size(mm)					Spools Per case	Case (Net weight kg)
		a	b	c	d	e		
24K	4	76	82	280	160	250	6	36
Box size： 630×420×305mm								

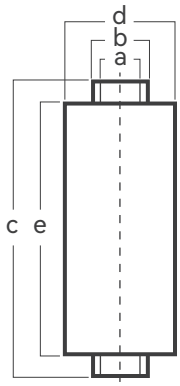

STORAGE

The product should be stored in a dry, cool and ventilated warehouse, away from fire and heat sources, moisture-proof, and the stacking layer should not exceed the stacking layer limit indicated on the packaging. Under the correct storage conditions, the shelf life of the product is 2 years. After the expiration date, it can continue to be used after passing the inspection.

Notice: There is a difference in product model names between general and special application fields which shall prevail in accordance with the actual situation. the values in the table are for reference only, not guaranteed ones, technical parameters and packaging specifications are subject to change without prior notice, please consult our company for details.

TDS Rev.2025-2: Updated January 14, 2025