


Measurement: Gain / Phase

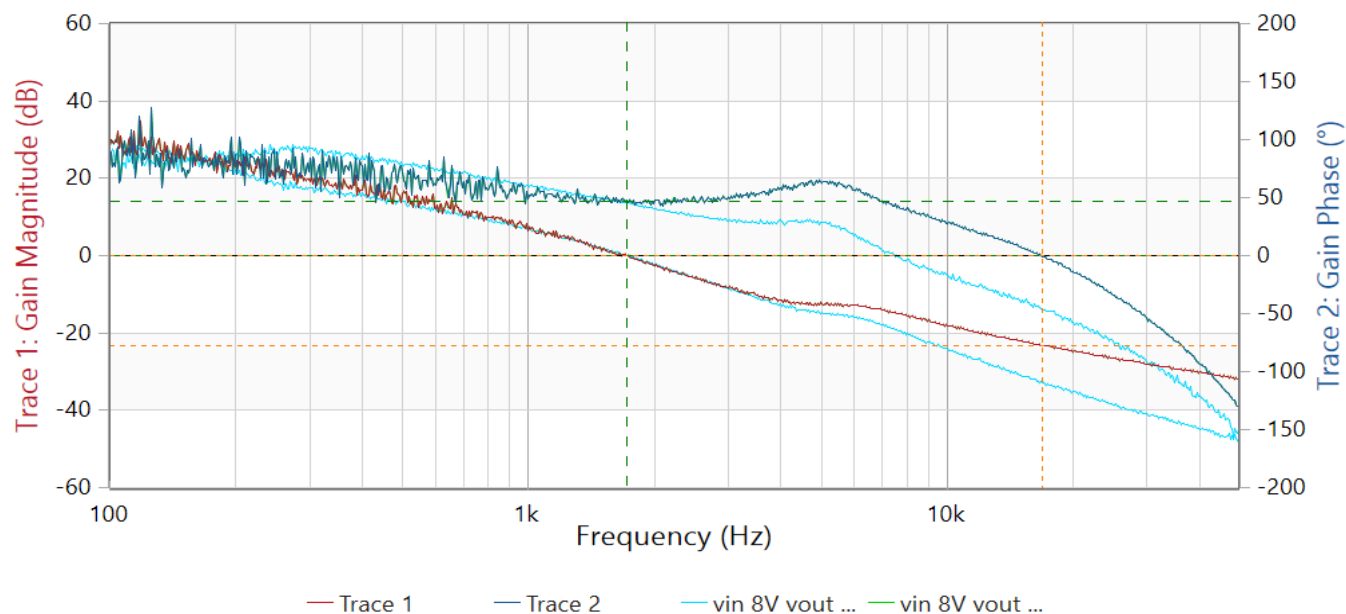

	Cursor 1	Cursor 2	Delta C2-C1
Frequency	1.726 kHz	16.955 kHz	15.229 kHz
Trace 1	Magnitude (dB)	Magnitude (dB)	Magnitude (dB)
Measurement	15.172 mdB	-23.219 dB	-23.234 dB
Trace 2	Phase (°)	Phase (°)	Phase (°)
Measurement	46.713 °	-512.733 m°	-47.226 °

Sweep

Start frequency:	100 Hz
Stop frequency:	50 kHz
Center frequency:	25.05 kHz
Span:	49.9 kHz
Sweep mode:	Logarithmic
Numer of points:	801

Hardware setup

Device type:	Bode100R1
Serial number:	LG275C
Receiver bandwidth:	100 Hz
Reference level	-6 dBm
DUT settling time:	0 ms

Calibration

	Full-Range	User-Range
Gain	Active	-

Termination

	Channel 1	Channel 2
Gain	1 MΩ	1 MΩ

Attenuator setting

	Channel 1	Channel 2
Transmission	0 dB	0 dB

Probe factor

	Channel 1	Channel 2
Gain	10: 1	10: 1