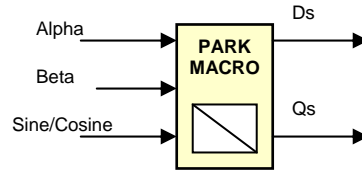| PARK	*Park Variable Transformation*

Description   This transformation converts vectors in balanced 2-phase orthogonal stationary system into orthogonal rotating reference frame.

Availability   This IQ module is available in one interface format:

1) The C interface version

Module Properties   **Type:** Target Independent, Application Independent

Target Devices: 28x Fixed Point or Piccolo

C Version File Names: park.h

IQmath library files for C: IQmathLib.h, IQmath.lib

C Interface

Object Definition

The structure of PARK object is defined by following structure definition

```
typedef struct {  _iq Alpha;        // Input: stationary d-axis stator variable
                  _iq Beta;         // Input: stationary q-axis stator variable
                  _iq Angle;        // Input: rotating angle (pu)
                  _iq Ds;           // Output: rotating d-axis stator variable
                  _iq Qs;           // Output: rotating q-axis stator variable
               } PARK;
```

typedef PARK *PARK_handle;

Item	Name	Description	Format[*]	Range(Hex)
Inputs	Alpha	Direct axis(d) component of the transformed signal	GLOBAL_Q	80000000-7FFFFFFF
	Beta	Quadrature axis(q) component of the transformed signal	GLOBAL_Q	80000000-7FFFFFFF
	Angle	Phase angle between stationary and rotating frame	GLOBAL_Q	00000000-7FFFFFFF (0 – 360 degree)
	Sine	Sine of the phase angle between stationary and rotating frame	GLOBAL_Q	80000000-7FFFFFFF
	Cosine	Cosine of the phase angle between stationary and rotating frame	GLOBAL_Q	80000000-7FFFFFFF
Outputs	Ds	Direct axis(D) component of transformed signal in rotating reference frame	GLOBAL_Q	80000000-7FFFFFFF
	Qs	Quadrature axis(Q) component of transformed signal in rotating reference frame	GLOBAL_Q	80000000-7FFFFFFF

[*] GLOBAL_Q valued between 1 and 30 is defined in the IQmathLib.h header file.

Special Constants and Data types

PARK

The module definition is created as a data type. This makes it convenient to instance an interface to the Park variable transformation. To create multiple instances of the module simply declare variables of type PARK.

PARK_handle

User defined Data type of pointer to PARK module

PARK_DEFAULTS

Structure symbolic constant to initialize PARK module. This provides the initial values to the terminal variables as well as method pointers.

Methods

PARK_MACRO(PARK_handle);

This definition implements one method viz., the Park variable transformation computation macro. The input argument to this macro is the module handle.

Module Usage

Instantiation
The following example instances two PARK objects
PARK park1, park2;

Initialization
To Instance pre-initialized objects
PARK park1 = PARK_DEFAULTS;
PARK park2 = PARK_DEFAULTS;

Invoking the computation macro
PARK_MACRO(park1);
PARK_MACRO(park2);

Example
The following pseudo code provides the information about the module usage.

```
main()
{

}

void interrupt periodic_interrupt_isr()
{
        park1.Alpha = ds1;              // Pass inputs to park1
        park1.Beta = qs1;               // Pass inputs to park1
        park1.Angle = ang1;             // Pass inputs to park1

        park2.Alpha = ds2;              // Pass inputs to park2
        park2.Beta = qs2;               // Pass inputs to park2
        park2.Angle = ang2;             // Pass inputs to park2

        PARK_MACRO(park1);              // Call compute macro for park1
        PARK_MACRO(park2);              // Call compute macro for park2

        de1 = park1.Ds;                 // Access the outputs of park1
        qe1 = park1.Qs;                 // Access the outputs of park1

        de2 = park2.Ds;                 // Access the outputs of park2
        qe2 = park2.Qs;                 // Access the outputs of park2

}
```
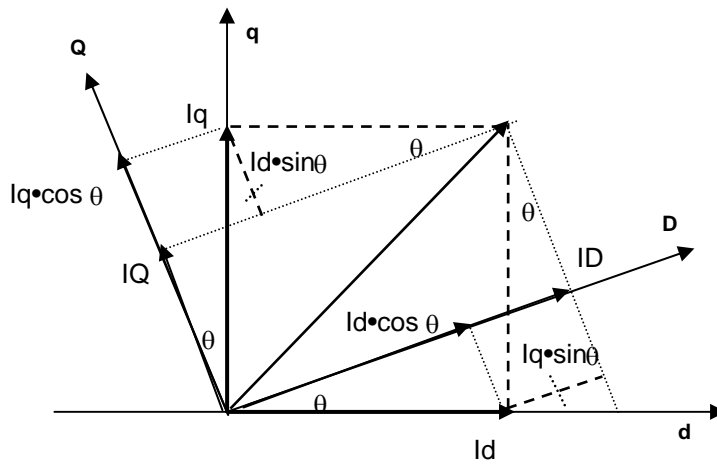
Technical Background

Implements the following equations:

$$\begin{cases} ID = Id \times \cos\theta + Iq \times \sin\theta \\ IQ = -Id \times \sin\theta + Iq \times \cos\theta \end{cases}$$

This transformation converts vectors in 2-phase orthogonal stationary system into the rotating reference frame as shown in figure below:

The instantaneous input quantities are defined by the following equations:

$$\begin{cases} id = I \times \sin(\omega t) \\ iq = I \times \sin(\omega t + \pi/2) \end{cases}$$

Next, Table 1 shows the correspondence of notations between variables used here and variables used in the program (i.e., park.c, park.h). The software module requires that both input and output variables are in per unit values.

	Equation Variables	Program Variables
Inputs	id	Alpha
	iq	Beta
	θ	Angle
	sin	Sine
	cos	Cosine
Outputs	ID	Ds
	IQ	Qs

Table 1: Correspondence of notations