



5161-AX-XXX Common Cathode 5161-BX-XXX Common Anode

## **Specification**

- Display Type: 7 Segment
- Size 0.56 inches (14mm)
- Forward Voltage 2.0V (max 2.5V)
- Reverse Voltage 5V
- Continuous forward Current 20mA
- Peak forward Current 30mA
- Power Dissaption 150mW
- Uniform brightness
- Glow in low voltage
- Low current drive
- Size 0.56 inches (14mm)
- Long life





## **Part Number**



**AS - Common Cathode** 

**BS - Common Anode** 







Drawing no: 5161XX-XXX	OEM Manufacturer : Lelook Displays		Drawn by : WES
Date : 20/04/2017	Sheet No 1 of 3	Ver 2.1 - 2017	Approve : TED




5161-AX-XXX Common Cathode

5161-BX-XXX Common Anode





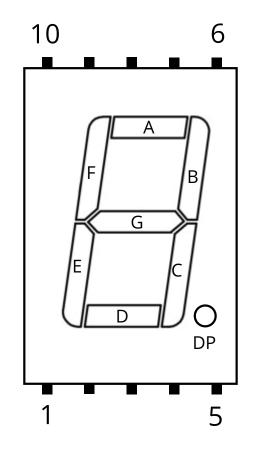


Pin	LED
1	E
2	D
ന	COM
4	C
5	DP
6	В
7	Α
8	COM
9	F
10	G


TOP VIEW


Drawing no: 5161XX-XXX	OEM Manufacturer : Lelook Displays		Drawn by : WES
Date : 20/04/2017	Sheet No 2 of 3	Ver 2.1 - 2017	Approve : TED




## Package Dimensions









Drawing no: 5161XX-XXX	OEM Manufacturer	: Lelook Displays	Drawn by : WES
Date : 20/04/2017	Sheet No 3 of 3	Ver 2.1 - 2017	Approve : TED