



SEVEN SEGMENT 1.5" COMMON CATHODE BLUE

Series: 15011


Size : 1.50-inch

Emitting color : Blue

Mode : Common-Cathode (CC)

Digit : 1-Digit

Category : LED 7-Segment Display

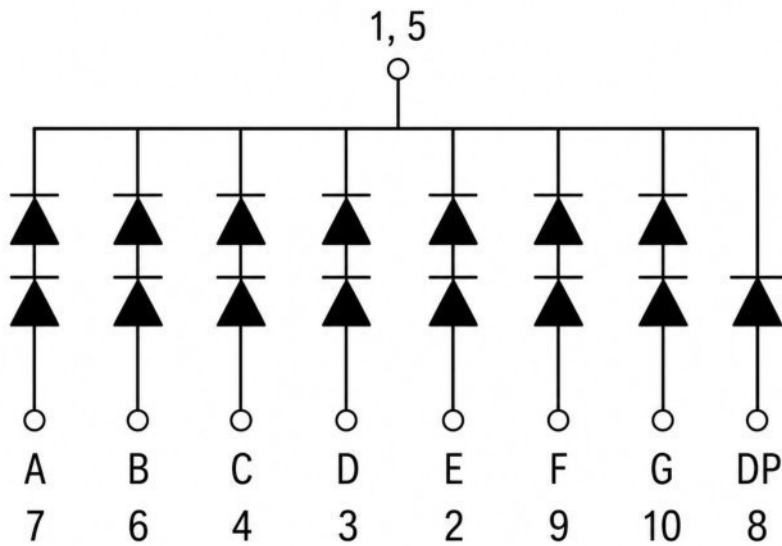

BLUE ELECTRO-OPTICAL PARAMETER

1. Electro-Optical Characteristics (Ta = 25°C)


PARAMETER	SYMBOL	DEVICES (BLUE)		UNIT	TEST CONDITIONS
		TYP	MAX		
Peak Emission Wavelength	λ_p	470	—	nm	IF = 10 mA
Forward Voltage	VF	3.5	—	V	IF = 10 mA
Reverse Current	IR	—	50	μ A	VR = 5 V
Segment To Segment (Dot To Dot) Luminous Intensity Ratio	IV-M	1.5 : 1	—	—	IF = 20 mA



2. Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

PARAMETER	SYMBOL	DEVICES (BLUE)	UNIT
Power Dissipation Per Dice	pad	70	mw
Derating Linear From 25°C Per Dice	—	0.27	$\text{mA}/^\circ\text{C}$
Continuous Forward Current Per Dice	I _{af}	30	mA
Peak Forward Current Per Dice (Duty Cycle 1/10,10KHz)	I _{pf}	100	mA
Reverse Voltage Per Dice	V _r	5	V
Operating Temperature	T _{opr}	-20°C to $+75^\circ\text{C}$	
Storage Temperature	T _{stg}	-20°C to $+85^\circ\text{C}$	
Solder Temperature	—	1.6 Inch Below Seating Place for 5 seconds at 230°C	




3. Electro-Optical Curve

RELATIVE INTENSITY VS WAVELENGTH

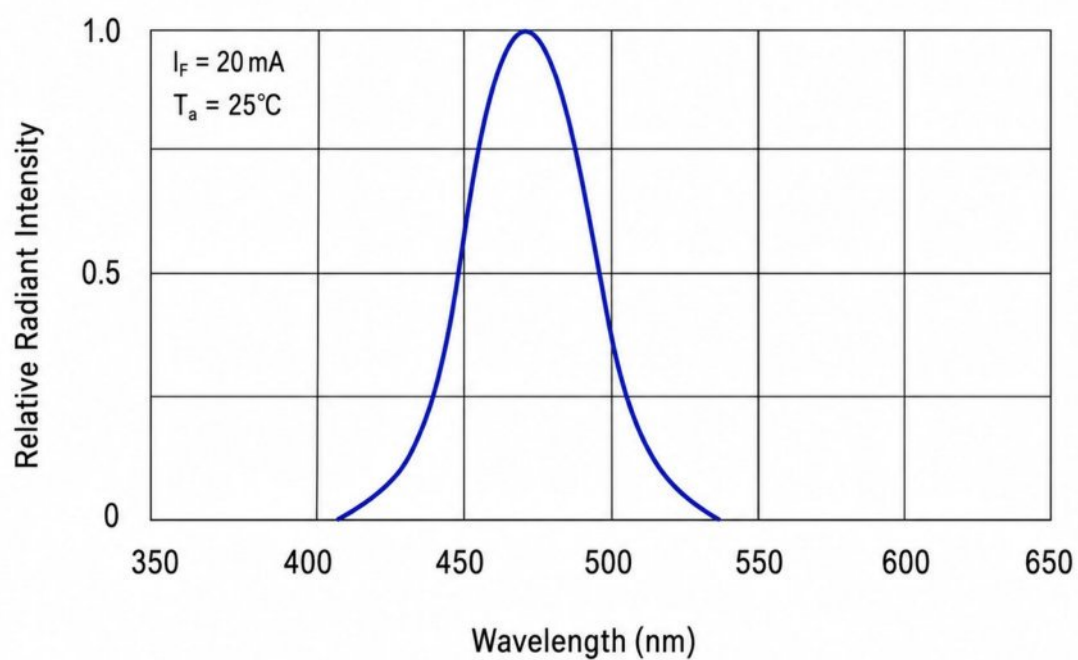

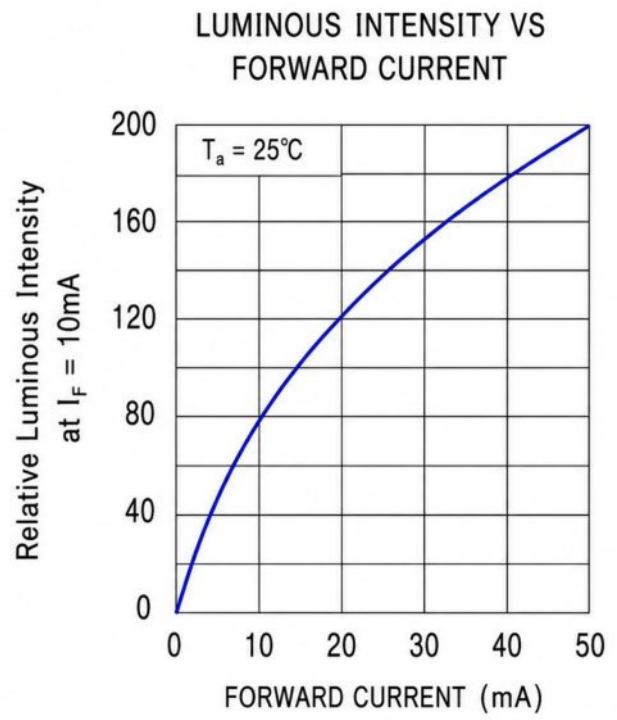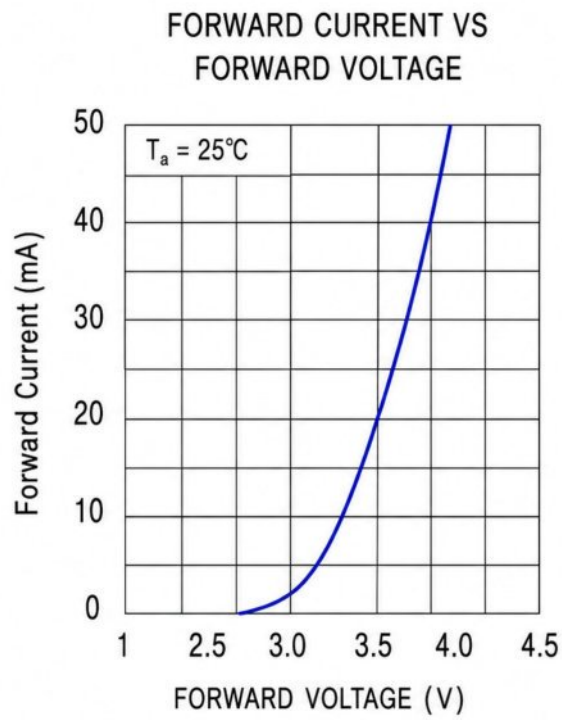

4. Dimensions

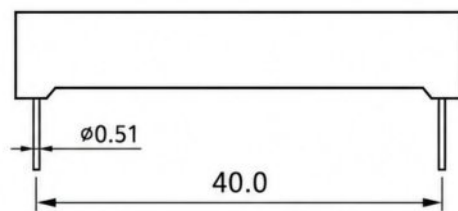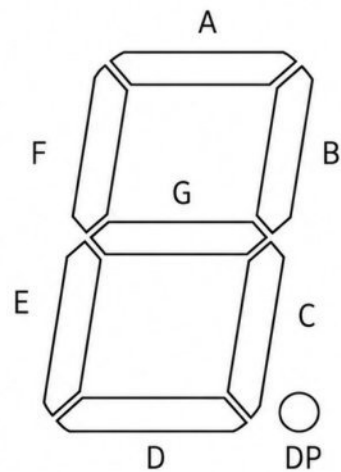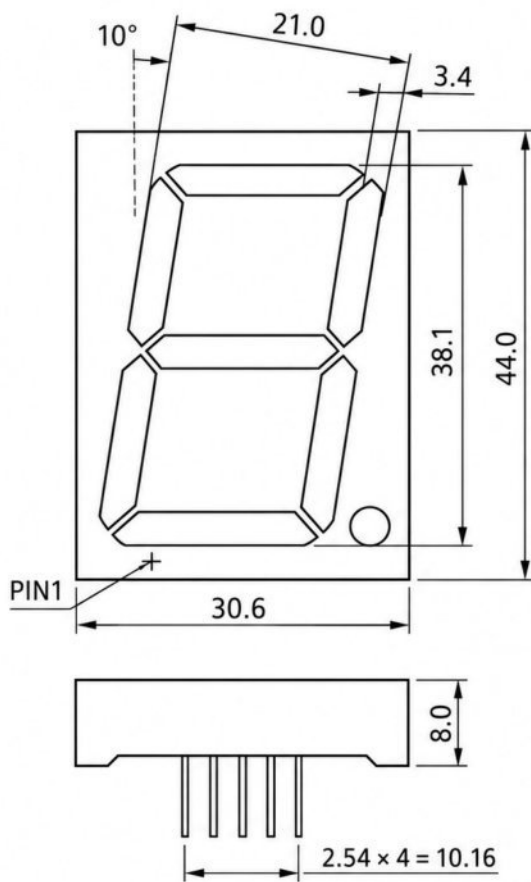

UNIT: mm