


GDPS008

IEC320 C8 AC Connector with Switch

IEC320 C7 and C8 Connector



The C7 (Female) and C8 (Male) connectors are commonly used in small appliances. C7/C8 is a two terminal connector and also known as the Figure-8 connector. The C7 and C8 connectors are typically rated for voltages up to 250 volts AC and currents up to 2.5 amperes and has a pin spacing of 8.6mm.






Part No: GDPS008

额定工作电压、电流Rating:	2.5A 250V
使用温度范围Temperature	-25+70 °C
接触电阻Contact Resistance:	$\leq 50m\Omega$
绝缘电阻Insulation Resistance:	$\geq 100M\Omega$
介电强度Insulation strengthy:	AC250V for 5 Minute
寿命switching Life:	≥ 10000 次
动作力度 Action intensity:	5-40N



DIMENSIONS

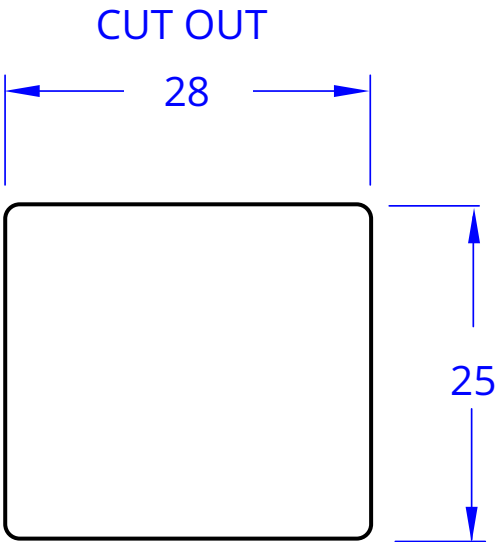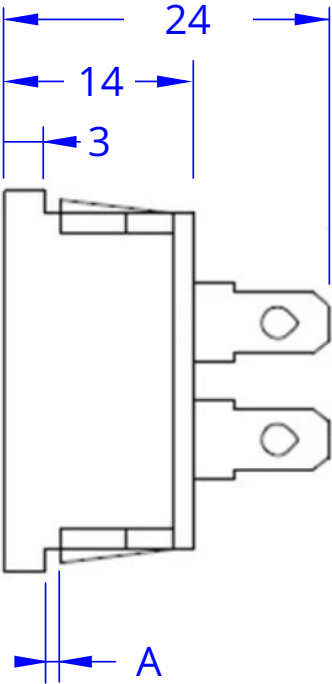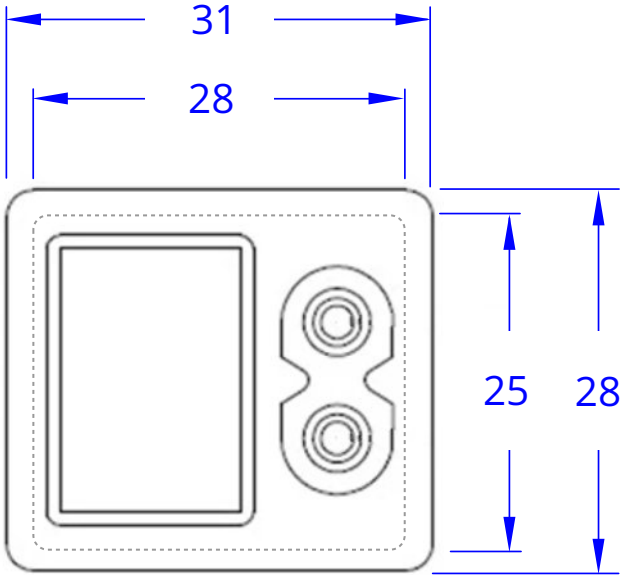

CODE	DIMENSION
A	1.0
	2.0
	3.0

Part No: GDP5008

Date : 23-05-2021
Tolerance +/- 0.5mm

Actual Measured Values

