


KF120 CONNECTOR SERIES

2.54mm PITCH CONNECTOR

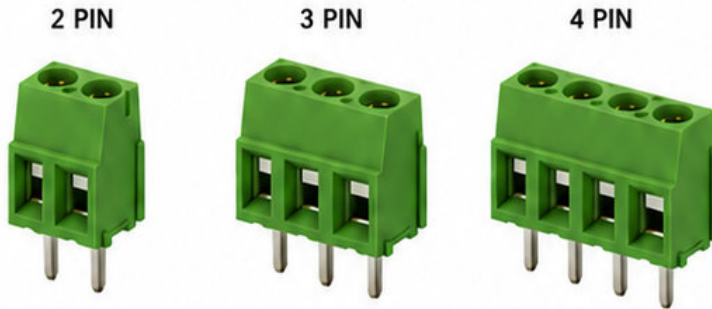

SPECIFICATIONS


Rated Voltage:	100V
Rated Current:	6A
Withstand Voltage:	1000VAC/min
Contact Resistance:	$\leq 20\text{m}\Omega$
Insulation Resistance:	$\geq 1000\text{M}\Omega$
Operating Temperature:	-25°C to +85°C

MATERIAL


Housing:	PA66 UL94V-0
Contact:	Tin-Plated Brass
Pin:	Copper Alloy

MECHANICAL DIMENSIONS (Unit: mm)


FRONT VIEW

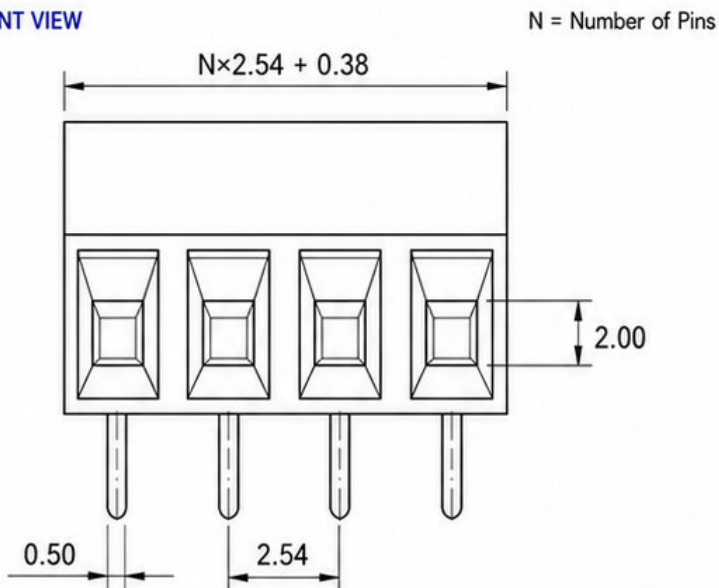


RIGHT SIDE VIEW

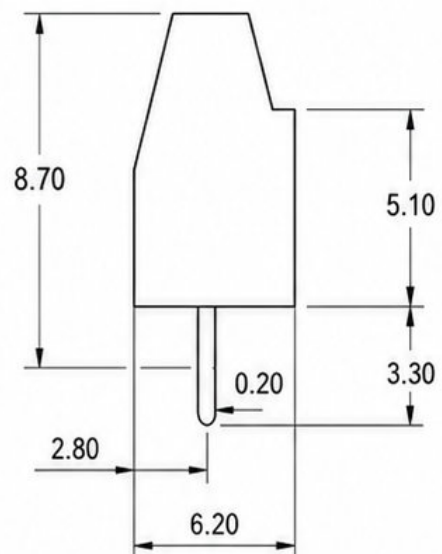

TOP VIEW

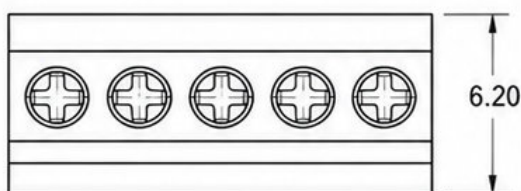

RECOMMENDED PCB LAYOUT (TOP VIEW)

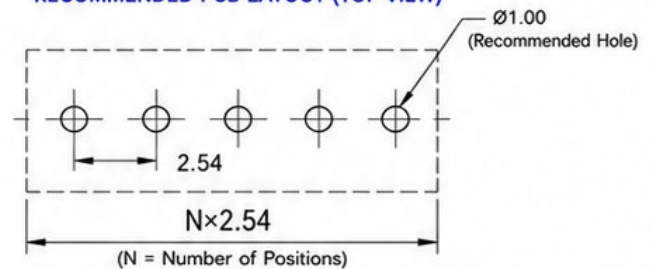

POLE	2 PIN (KF120-2P)	3 PIN (KF120-3P)	4 PIN (KF120-4P)
N (Number of Pins)	2	3	4
Width ($N \times 2.54 + 0.38$)	5.46 mm	8.00 mm	10.54 mm
Height (from PCB)	8.70 mm	8.70 mm	8.70 mm
Depth	6.20 mm	6.20 mm	6.20 mm

ELECTRICAL

- Rated Voltage: 100V
- Rated Current: 6A
- Withstand Voltage: 1000VAC/min
- Contact Resistance: $\leq 20\text{m}\Omega$
- Insulation Resistance: $\geq 1000\text{M}\Omega$
- Operating Temperature: -25°C to +85°C

WIRE RANGE

AWG	Cross Section
26	0.14 mm ²
24	0.20 mm ²
22	0.34 mm ²
20	0.50 mm ²
18	0.75 mm ²

ORDERING INFORMATION

KF120 - X P - 254

Pitch 2.54mm

X = Number of Pins
2 = 2 Pins
3 = 3 Pins
4 = 4 Pins

Series Name
KF120

NOTES

- All dimensions are in millimeters (mm).
- Tolerance: $\pm 0.15\text{mm}$ unless otherwise specified.
- For best performance, use within the rated voltage and current.
- Specifications are subject to change without notice.