


KF120 Current Rating Reference

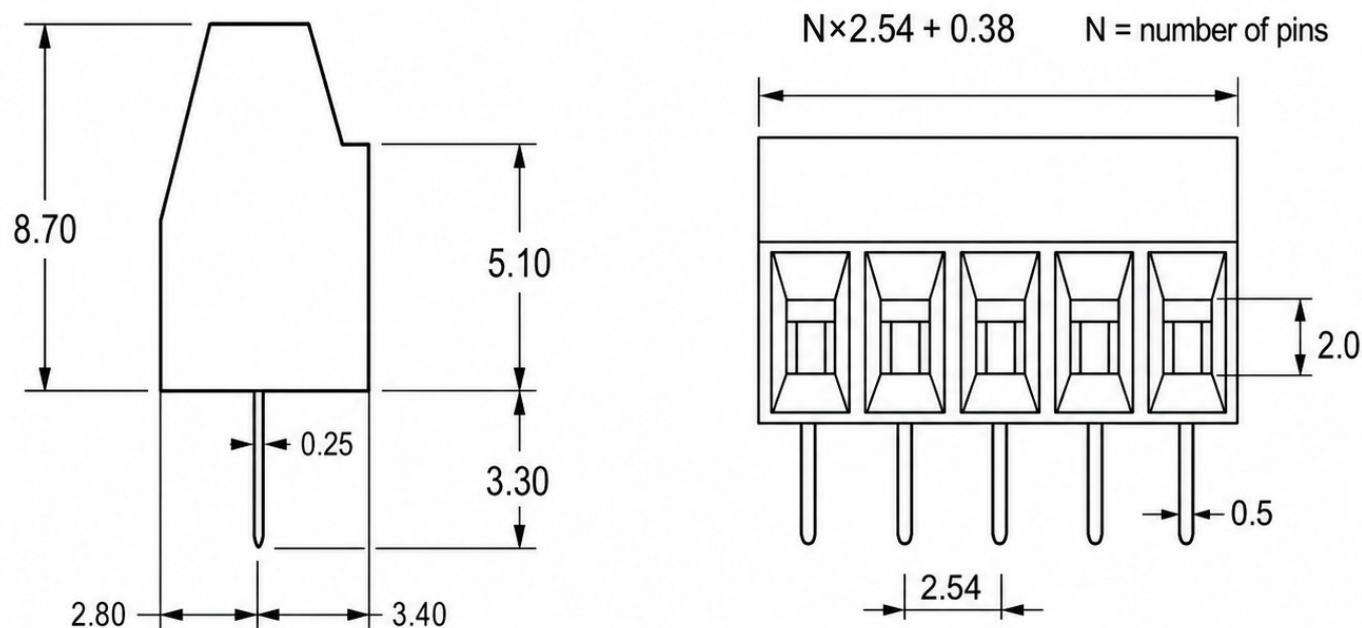

Connector current ratings should always be verified against the actual terminal pin dimensions. The values below are practical engineering estimates for copper terminals under normal operating conditions.

Terminal Size (mm)	Cross Section (mm ²)	Recommended Current	Maximum Current
0.5 × 0.25	0.125	2.5A	3A
0.5 × 0.5	0.25	4A	5A
0.8 × 0.5	0.40	6A	8A