


KF120 CONNECTOR SERIES


2.54mm PITCH CONNECTOR

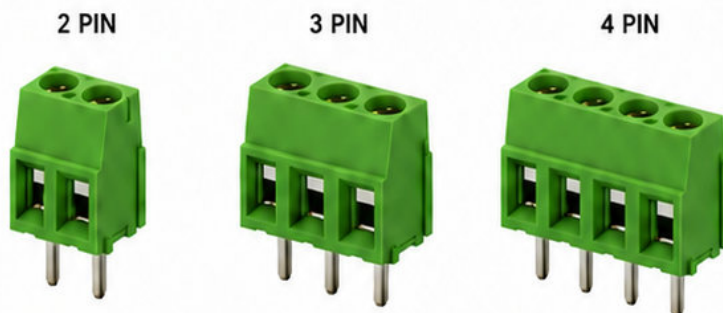


SPECIFICATIONS

- Rated Voltage: 100V
- Rated Current: 3A
- Withstand Voltage: 1000VAC/min
- Contact Resistance: $\leq 20\text{m}\Omega$
- Insulation Resistance: $\geq 1000\text{M}\Omega$
- Operating Temperature: -25°C to $+85^{\circ}\text{C}$


MECHANICAL DIMENSIONS (Unit: mm)

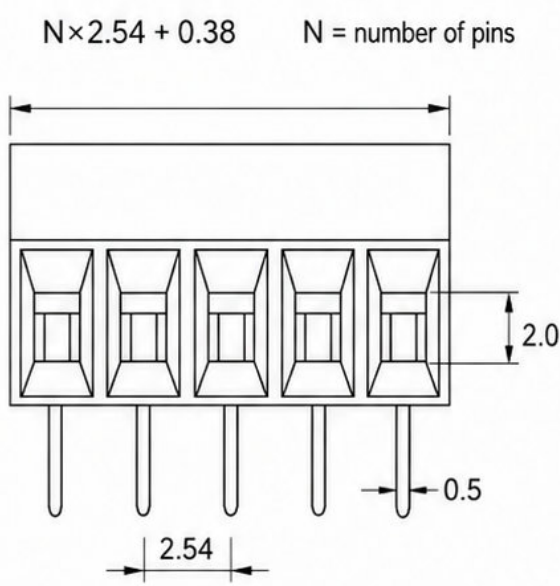


RIGHT SIDE VIEW

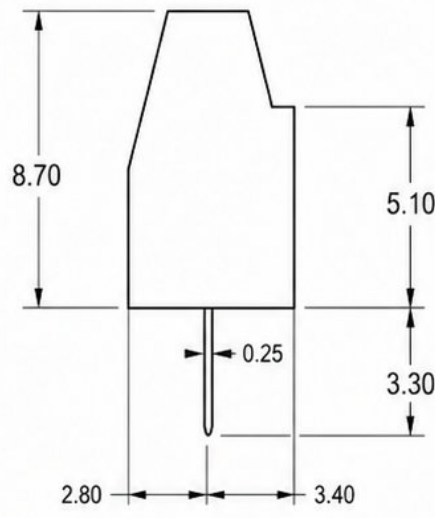

TOP VIEW

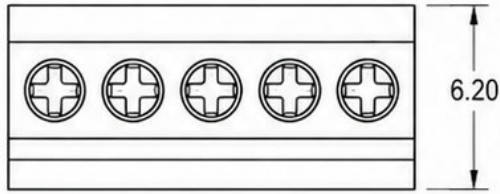

RECOMMENDED PCB LAYOUT (TOP VIEW)

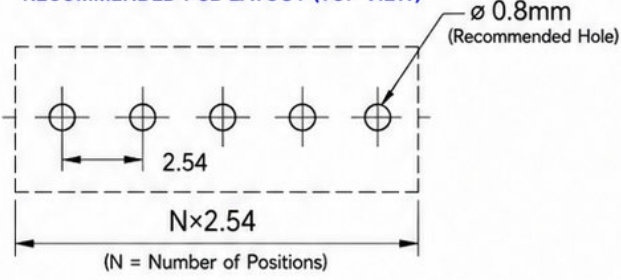

ELECTRICAL

- Rated Voltage: 100V
- Rated Current: 3A
- Withstand Voltage: 1000VAC/min
- Contact Resistance: $\leq 20\text{m}\Omega$
- Insulation Resistance: $\geq 1000\text{M}\Omega$
- Operating Temperature: -25°C to $+85^{\circ}\text{C}$

WIRE RANGE

AWG	Cross Section
26	0.14 mm ²
24	0.20 mm ²
22	0.34 mm ²
20	0.50 mm ²
18	0.75 mm ²

ORDERING INFORMATION

KF120 - X P - 254

Series Name: KF120

Pitch: 2.54mm

X = Number of Pins

2 = 2 Pins

3 = 3 Pins

4 = 4 Pins

NOTES

- All dimensions are in millimeters (mm).
- Tolerance: $\pm 0.15\text{mm}$ unless otherwise specified.
- For best performance, use within the rated voltage and current.
- Specifications are subject to change without notice.