REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	NEW DRAWING	04JUL2018	GCM	AS



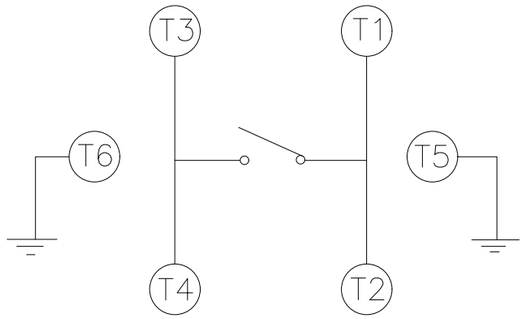

CIRCUIT DIAGRAM

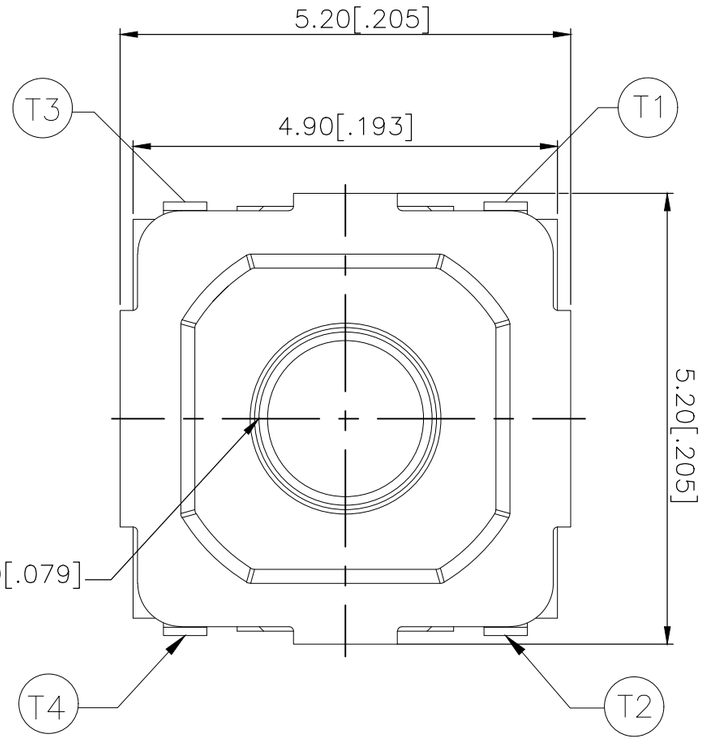

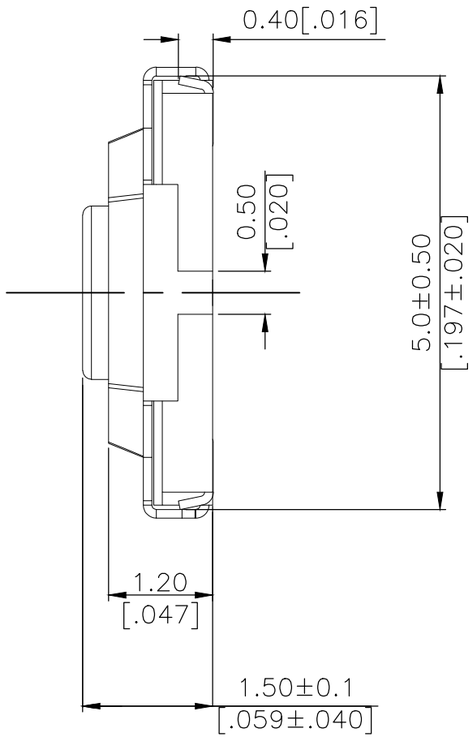

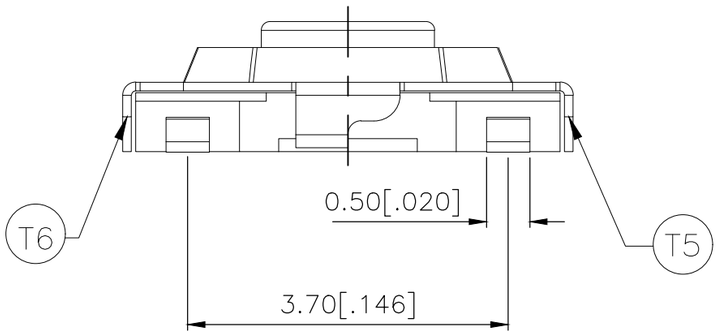

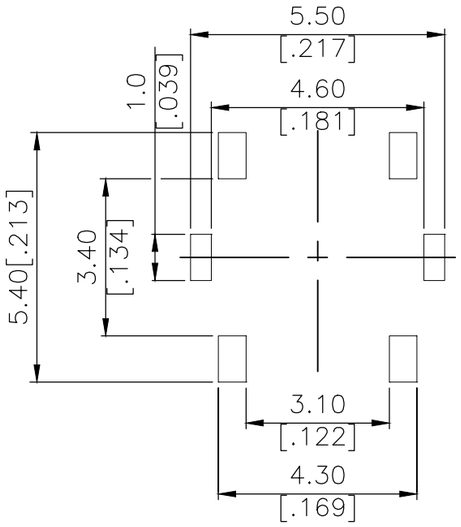

P.C.B LAYOUT

260±50	MSLPT5252BL4MTR	2337243-4
160±50	MSLPT5252BL3MTR	2337243-3
100±50	MSLPT5252BL2MTR	2337243-2
70±50	MSLPT5252BL1MTR	2337243-1
ACTUATION FORCE (gf)	SMART PART NUMBER	PART NUMBER

PRELIMINARY

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± 0.2 [.008]
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL: –

FINISH: –

DWN	GANESH C M 04JUL2018
CHK	ALEXANDER SHARPE 04JUL2018
APVD	ALEXANDER SHARPE 04JUL2018
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	

TE Connectivity Ltd.

NAME: SWITCH, TACTILE, LOW-PROFILE, MINI, 5.2 x 5.2 x 1.5, J BEND

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2337243	—

CUSTOMER DRAWING

SCALE	SHEET	REV
NTS	1 OF 3	1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

NOTES:

1. MATERIALS:
   TERMINAL: COPPER ALLOY, SILVER OVER NICKEL FINISH
   BASE: THERMOPLASTIC, BLACK
   ACTUATOR: STEEL, NICKEL FINISH
   TAPE: POLYTETRAFLUOROETHYLENE
   CONTACT: STAINLESS STEEL, SILVER OVER NICKEL FINISH
   COVER: NICKEL SILVER

2. COMPLIANCE:
   ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003(RoHS)

3. SPECIFICATIONS:
   RATING: 50 mA, 12V DC
   CONTACT RESISTANCE: 100mΩ MAXIMUM (INITIAL)
   INSULATION RESISTANCE: 100MΩ MINIMUM (INITIAL)
   DIELECTRIC STRENGTH: 250 V AC, 1 MINUTE
   OPERATING LIFE: 2337243–1 (70gf) = 1,000,000 CYCLES WITH LOAD
   2337243–2 (100gf) = 1,000,000 CYCLES WITH LOAD
   2337243–3 (160gf) = 1,000,000 CYCLES WITH LOAD
   2337243–4 (260gf) = 200,000 CYCLES WITH LOAD
   TRAVEL: $0.25^{+0.1}_{-0.2}$ [$.010^{+.004}_{-.008}$]
   ACTUATION FORCE: 2337243–1 = 70±50 gf
   2337243–2 = 100±50 gf
   2337243–3 = 160±50 gf
   2337243–4 = 260±50 gf
   OPERATING TEMPERATURE: –25° TO 70°C
   STORAGE TEMPERATURE: –30° TO 80°C

4. SOLDER CONDITIONS:

SMT:

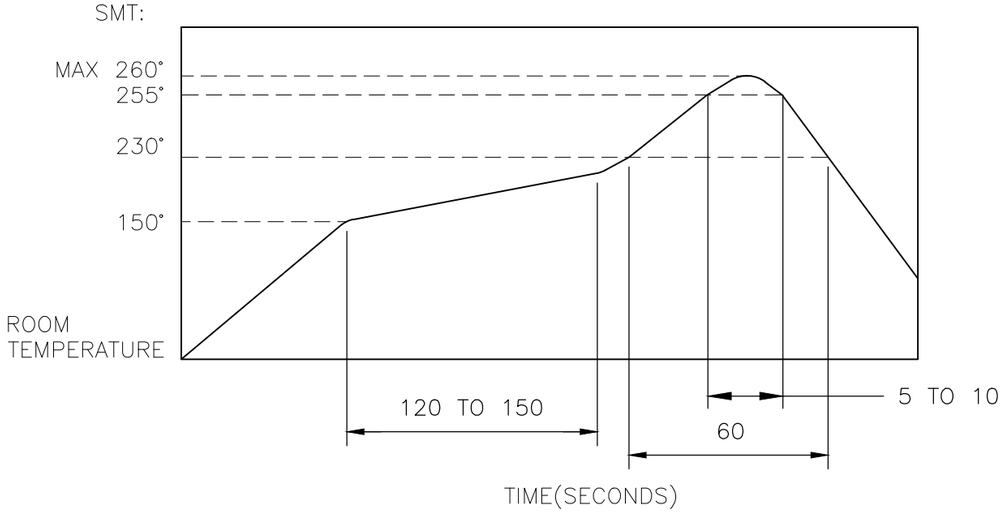

THE CONDITON NOTED ABOVE IS THE TEMPERATURE OF THE COPPER FOIL ON THE SURFACE OF THE PCB. THERE ARE CASES WHERE THE TEMPERATURE OF THE BOARD GREATLY DIFFERS FROM THE SURFACE OF THE SWITCH. DO NOT ALLOW THE SURFACE TEMPERATURE OF THE SWITCH TO EXCEED 260°C.

MANUAL SOLDERING

SOLDERING TEMPERATURE	350°C MAXIMUM
CONTINUOUS SOLDERING TIME	5 SECONDS MAXIMUM

PRECAUTIONS IN HANDLING

1. CARE SHOULD BE EXERCISED SO THAT FLUX FROM THE TOP SURFACE OF THE PRINTED CIRCUIT BOARD DOES NOT ADHERE TO THE SWITCH.
2. DO NOT WASH THE SWITCH

5. OPERATING PRECAUTIONS:
   1. DO NOT ACTUATE THE SWITCH WITH EXCESSIVE FORCE
   2. DISCONTINUE FORCE AFTER THE SWITCH HAS BEEN ACTUATED SO AS TO AVOID DEFORMATION OF THE COMPONENTS OF THE SWITCH. DEFORMATION OF THE COMPONENTS MAY CAUSE THE SWITCH TO MALFUNCTION.
   3. ALIGN THE PLUNGER WITH THE SWITCH TO INSURE PROPER OPERATION

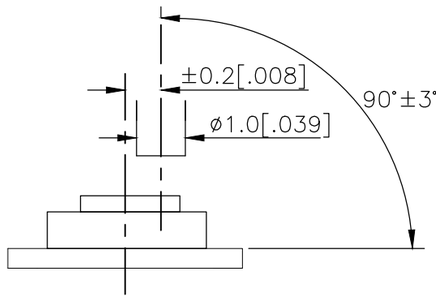

6. STORAGE CONDITIONS:
   AVOID THE FOLLOWING AS EXPOSURE MAY AFFECT THE PERFORMANCE AND/OR THE SOLDERABILITY OF THE SWITCH:
   1. TEMPERATURE OF –10° TO 40°C AND 85% HUMIDITY
   2. EXPOSURE TO CORROSIVE GAS
   3. STORAGE OVER 6 MONTHS
   4. EXPOSURE TO DIRECT SUNLIGHT

   STORAGE CONDITIONS SHOULD PREVENT HEAVY IMPACT OR LOADING

   AFTER OPENING THE PACKAGE, UNUSED SWITCHES MUST BE REPACKAGED IN A MOISTURE–PROOF AND AIRTIGHT ENVIRONMENT.

PRELIMINARY

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.2 [.008]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN GANESH C M 04JUL2018
CHK ALEXANDER SHARPE 04JUL2018
APVD ALEXANDER SHARPE 04JUL2018
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT
CUSTOMER DRAWING

TE Connectivity Ltd.

NAME
SWITCH, TACTILE, LOW–PROFILE, MINI, 5.2 x 5.2 x 1.5, J BEND
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–2337243	—

SCALE	SHEET	REV
NTS	2 OF 3	1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

PACKAGING:
4,000 SWITCHES PER REEL

THE DIMENSIONS OF CARRIER TAPE AND REEL:

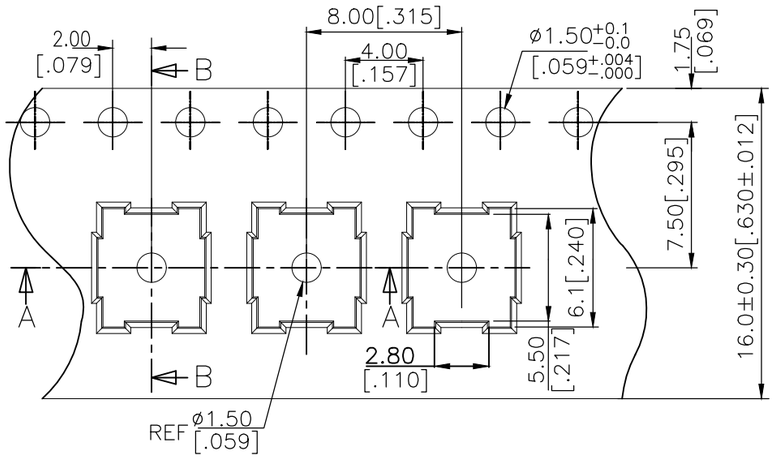

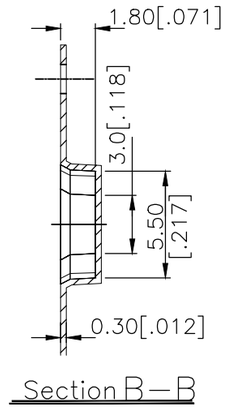

Section B—B



Section A—A

ORIENTATION OF PILOT HOLES

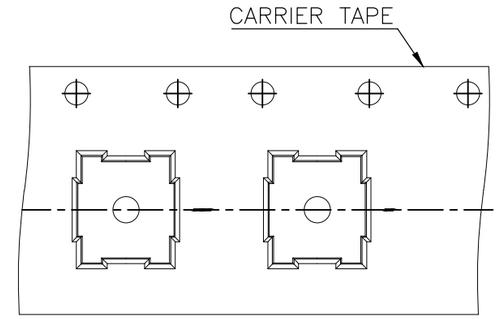

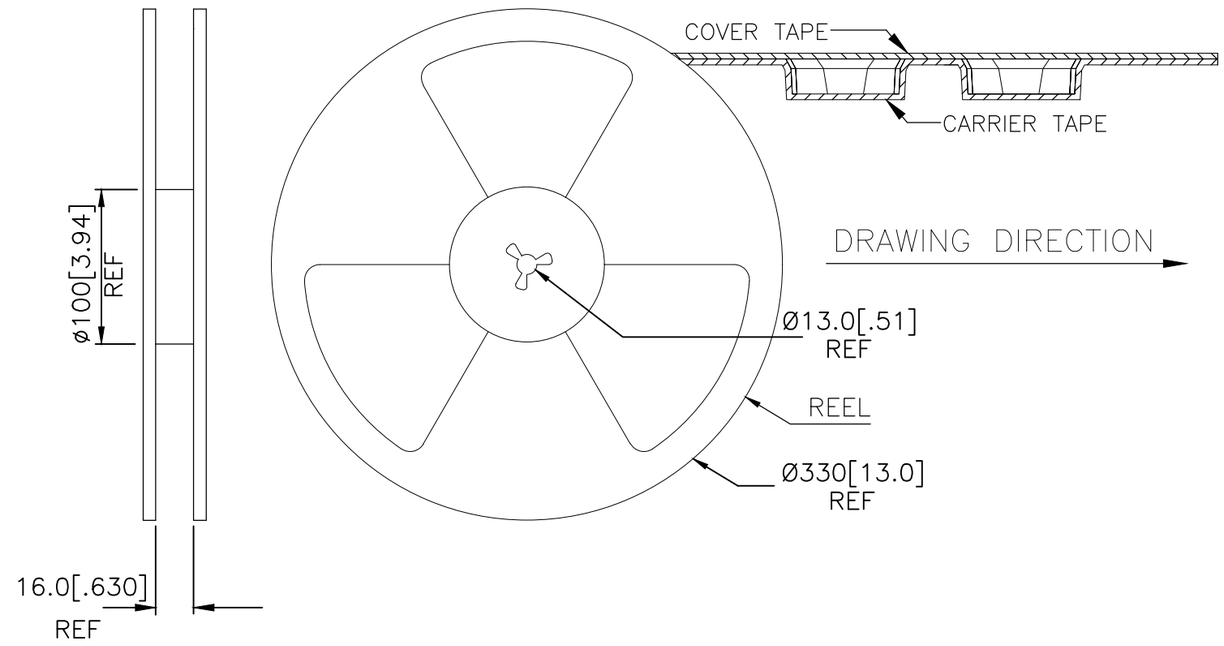

PRELIMINARY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GANESH C M 04JUL2018	TE Connectivity Ltd.	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± – ; 1 PLC ± – ; 2 PLC ± 0.2 [.008] ; 3 PLC ± – ; 4 PLC ± – ; ANGLES ± –	CHK ALEXANDER SHARPE 04JUL2018	NAME SWITCH, TACTILE, LOW–PROFILE, MINI, 5.2 x 5.2 x 1.5, J BEND –	
		APVD ALEXANDER SHARPE 04JUL2018		
		PRODUCT SPEC —		
		APPLICATION SPEC —		
MATERIAL –	FINISH –	WEIGHT	SIZE A3 / CAGE CODE 00779 / DRAWING NO C-2337243 / RESTRICTED TO —	
		CUSTOMER DRAWING	SCALE NTS / SHEET 3 OF 3 / REV 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:
MSLPT5252BL1MTR