



- NOTE 1 REFERENCE IS A.
2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
3 THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.

RECOMMENDED FPC, FFC

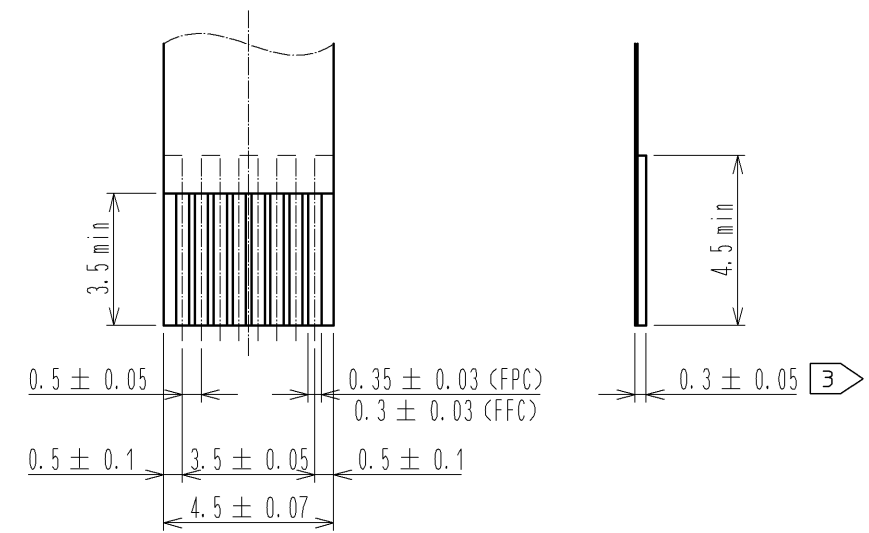

RECOMMENDED LAND PATTERN, METAL MASK

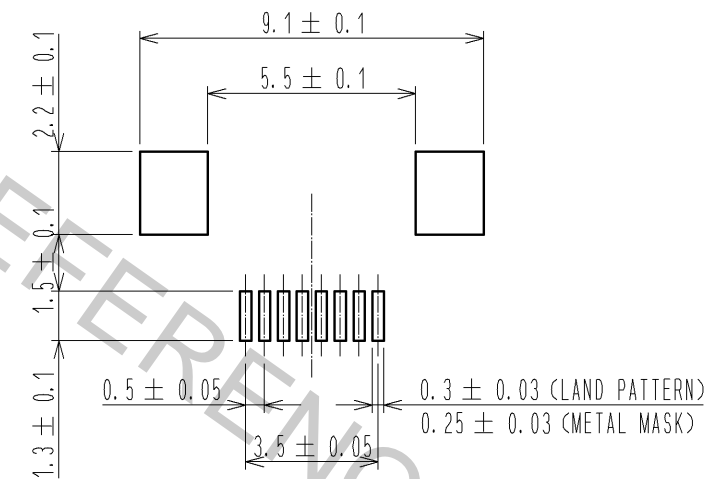

RECOMMENDED METAL MASK THICKNESS: t=0.15

4	BRASS	TIN PLATING 1μMIN OVER NICKEL 1μMIN.	8	(CONNECTOR)	
3	PHOSPHOR BRONZE	GOLD PLATING 0.05μMIN OVER NICKEL 1μMIN.	7	POLYSTYRENE	
2	PPS	(DEEP BROWN) UL94V-0	6	POLYESTER	
1	POLYAMIDE	(BEIGE) UL94V-0	5	POLYSTYRENE	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		5 : 1		1	DIS-F-002766	MK. YASUMI	HS. SAKAMOTO	09. 11. 17

	HIROSE ELECTRIC CO., LTD.	APPROVED :RI. TAKAYASU	06. 08. 25	DRAWING NO.	EDC3-156451-51	
		CHECED :TN. KUWATA	06. 08. 25	PART NO.	FH12-8S-0. 5SH(55)	
		DESIGNED :MK. YASUMI	06. 08. 25	CODE NO.	CL586-0744-5-55	
		DRAWN :MK. YASUMI	06. 08. 25			

	1	2
--	---	---

