
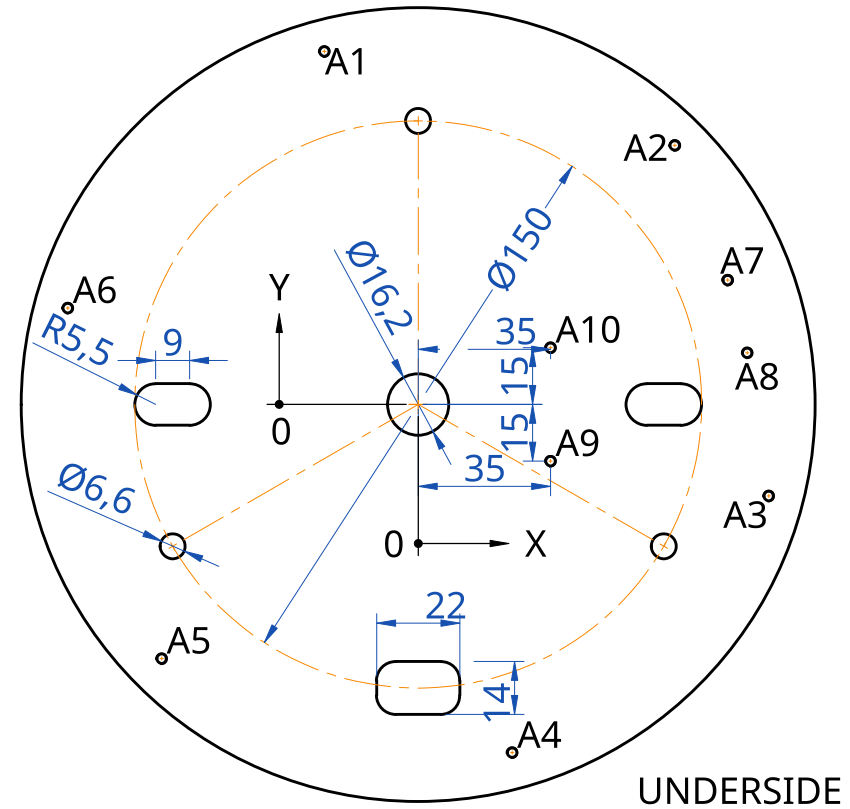
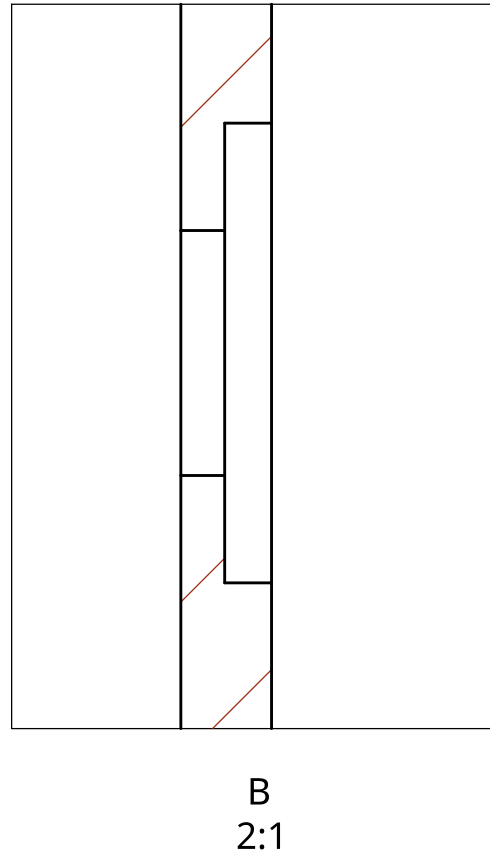
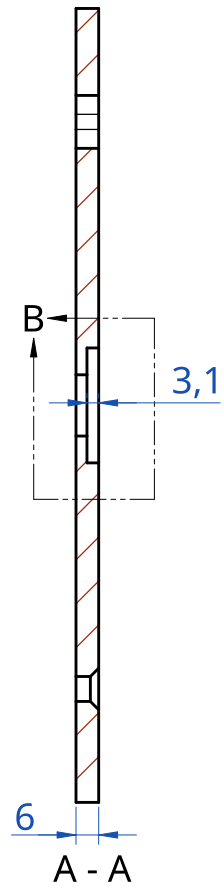


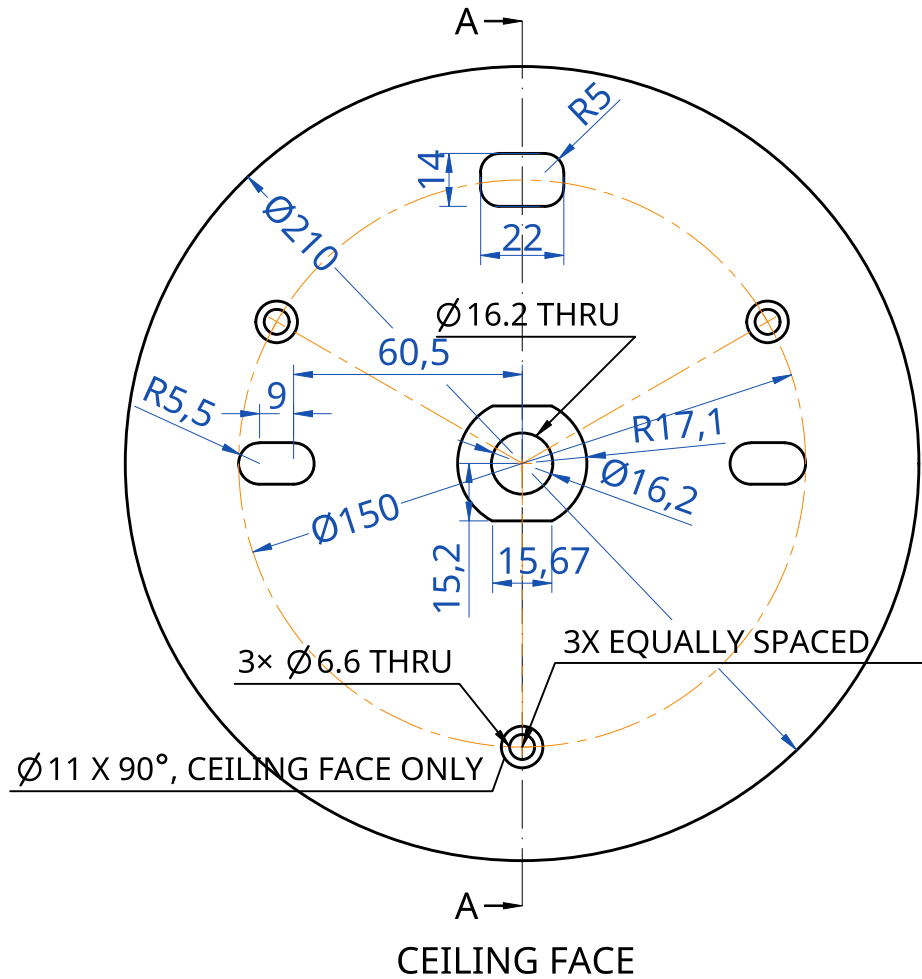

TAG	X LOC	Y LOC	SIZE	QTY
A1	-24,85	93,37	Ø2,5 ∇5 M3x0,5 ∇3,5	10
A2	67,88	68,52		
A3	92,73	-24,21		
A4	24,85	-92,09		
A5	-67,88	-67,24		
A6	-92,73	25,49		
A7	81,88	32,89		
A8	87,03	13,65		
A9	35,00	-15,00		
A10	35,00	15,00		

- NOTES:
1. MATERIAL: STAINLESS STEEL 304, 6.0 mm.
 2. FINISH: BRUSHED. PASSIVATE IF AVAILABLE.
 3. GENERAL TOLERANCES PER ISO 2768-mK UNLESS STATED.
 4. ALL TAPPED HOLES M3x0.5-6H, 3.5 DEEP THREAD, 5.0 DEEP DRILL, BLIND, FROM THE UNDERSIDE ONLY. TAPS MUST NOT BREAK THROUGH TO THE CEILING FACE.
 5. INTERNAL CORNER RADII R2 MIN ON BOTH ANCHOR SLOTS AND THE TETHER OPENING.
 6. POCKET FLATS 30.4 +0.3/-0.0.
 7. BREAK SHARP EDGES 0.3 MAX.
 8. ANGULAR POSITIONS MEASURED CCW FROM THE CENTRELINE THROUGH BOTH ANCHOR SLOTS, VIEWED FROM THE CEILING FACE.
 9. DO NOT TAKE THREADS OR TOLERANCES FROM THE STEP FILE.
 10. Ø34.2 POCKET AND ALL COUNTERSINKS ARE ON THE CEILING FACE. ALL TAPPED HOLES ARE ON THE UNDERSIDE.
 11. HOLE TABLE COVERS TAPPED HOLES ONLY. THROUGH HOLES ARE DIMENSIONED ON THE VIEWS.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS ANGULAR = ± ° SURFACE FINISH DO NOT SCALE DRAWING BREAK ALL SHARP EDGES AND REMOVE BURRS FIRST ANGLE PROJECTION	NAME	SIGNATURE	DATE			
	DRAWN	SYAS	2026-07-27			
	CHECKED					
	APPROVED					
				TITLE		
				SIZE	DWG NO.	REV.
				A3		
				SCALE	1:2	1 of 1