

## ■ Features


- High Luminous LEDs
- 8mm Straw Standard Directivity
- Superior Weather-resistance
- UV Resistant Epoxy
- Water Clear Type

## ■ Applications

- Electronic Signs And Signals
- Small Area Illuminations
- Back Lighting
- Other Lighting

## 参考資料

## ■ Outline Dimension

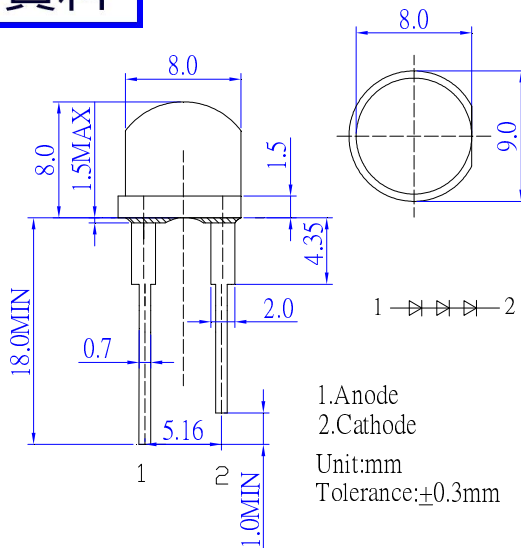

## ■ Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		W/M/B/G	Y/O/R	
DC Forward Current	I <sub>F</sub>	45	50	mA
Pulse Forward Current*	I <sub>FP</sub>	80	90	mA
Reverse Voltage	V <sub>R</sub>	15	15	V
Power Dissipation	P <sub>D</sub>	486	390	mW
Operating Temperature	T <sub>opr</sub>	-30 ~ +85		°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +100		°C
Lead Soldering Temperature	T <sub>sol</sub>	260°C/5sec		-

\*Pulse width Max 10ms , Duty ratio max 1/10

## ■ Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color			V <sub>F</sub> (V)			I <sub>R</sub> (μA)	Φ v(lm)*			λD(nm)*			2θ1/2(deg)
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				I <sub>F</sub> =40mA			V <sub>R</sub> =15V	I <sub>F</sub> =40mA			I <sub>F</sub> =40mA			
OS4WM387E1U	Pure White	W		8.4	9.3	10.8	10	45	55	-	CCT:5500-8000K			140
OS5WM387E1U	Cool White	W		8.4	9.3	10.8	10	40	50	-	CCT:8000-17000K			140
OS5MM387E1U	Warm White	M		8.4	9.3	10.8	10	40	50	-	CCT:2500-3500K			140
OS4BM387E1U	Blue	B		8.4	9.3	10.8	10	8	12	-	455	460	465	140
OSG58387E1U	Pure Green	G		8.4	9.3	10.8	10	28	35	-	520	525	530	140
OS5YE387E1U	Yellow	Y		5.7	6.6	7.8	10	15	20	-	585	590	595	140
OS5OG387E1U	Orange	O		5.7	6.6	7.8	10	28	35	-	600	605	610	140
OS5RE387E1U	Red	R		5.7	6.6	7.8	10	15	20	-	620	625	630	140

\*1 Tolerance of chromaticity coordinates is ±10%

\*2 Tolerance of luminous intensity is ±15%

## ■ Directivity

