

Product overview

Product description and front, rear, and inside views



ThinkSystem SE350 product overview

The ThinkSystem SE350 is a new, purpose-built Internet of Things (IOT) server. It is small and compact and can be hung on a wall, mounted in a rack, or stacked on a shelf. The SE350 can handle temperatures from 0° to 55°C, and it can also be used in locations, such as construction site trailers and manufacturing floors, where vibrations and dusty conditions are common. It is also a good solution for traditional office or branch locations due to its office-friendly acoustics.

The SE350 uses Intel Xeon-D processors (up to 16 cores), and it features up to 256 GB of RAM and 16 TB of internal solid-state storage. The SE350 also supports the NVIDIA Tesla T4 for workloads such as Edge Inferencing, making it an ideal solution for AI deployments.

Front view

The front view of the server varies according to the model. Click each model to see more information.

Wireless-enabled
LOM package

10 GbE SFP+
LOM package

10GBASE-T
network model


Front view

The front view of the server varies according to the model. Click each model to see more information.

Wireless-enabled
LOM package

10 GbE SFP+
LOM package

10GBASE-T
network model

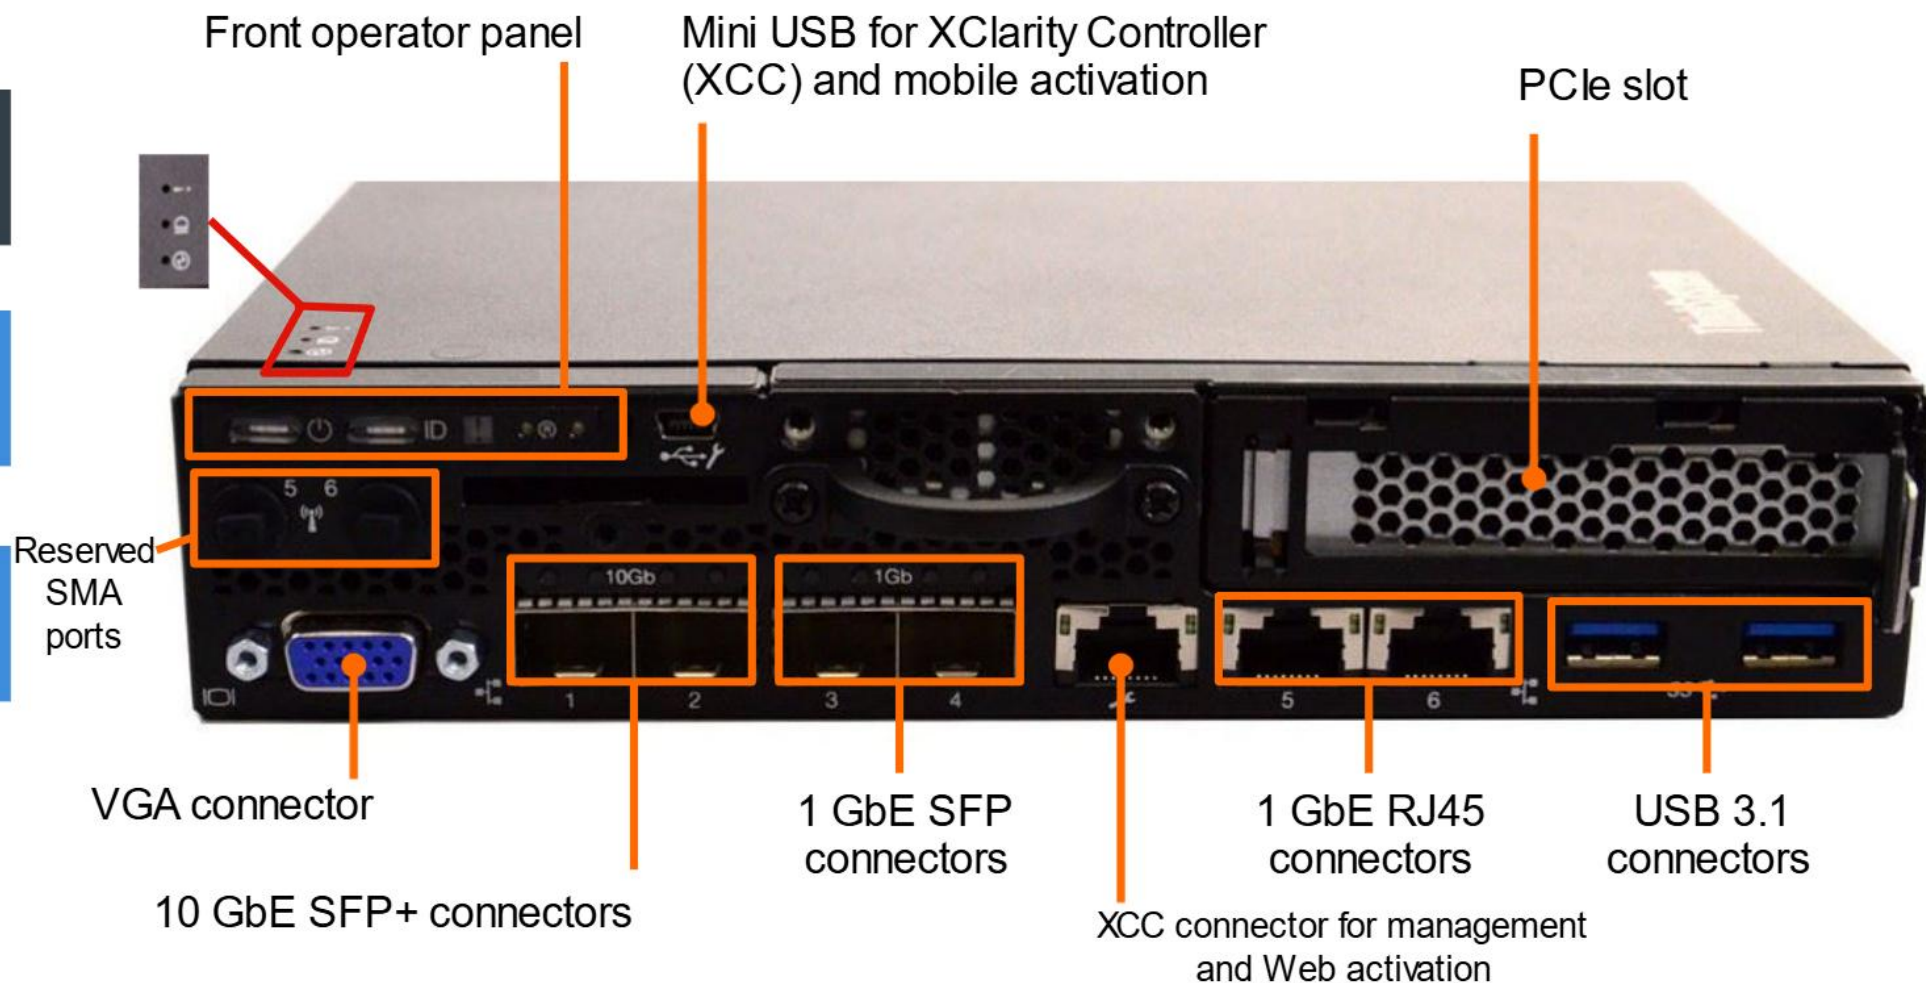


Front view

The front view of the server varies according to the model. Click each model to see more information.

Wireless-enabled
LOM package

10 GbE SFP+
LOM package

10GBASE-T
network model

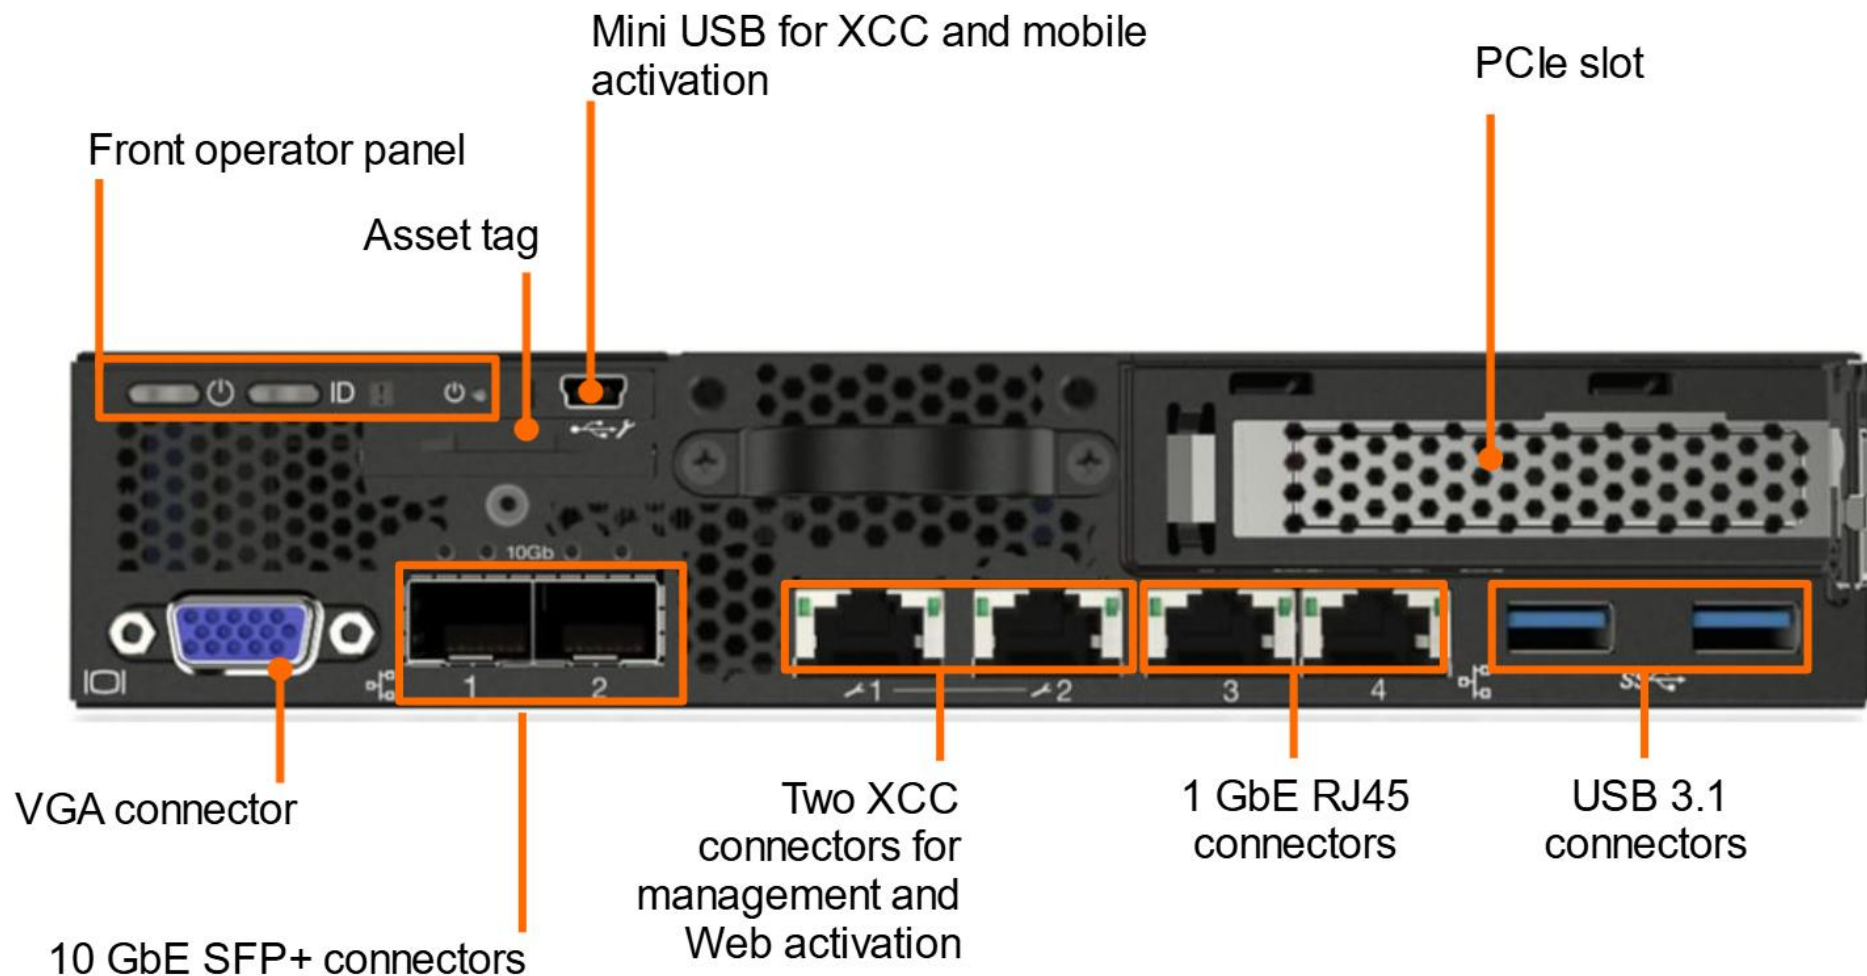


Front view

The front view of the server varies according to the model. Click each model to see more information.

Wireless-enabled
LOM package


10 GbE SFP+
LOM package

10GBASE-T
network model

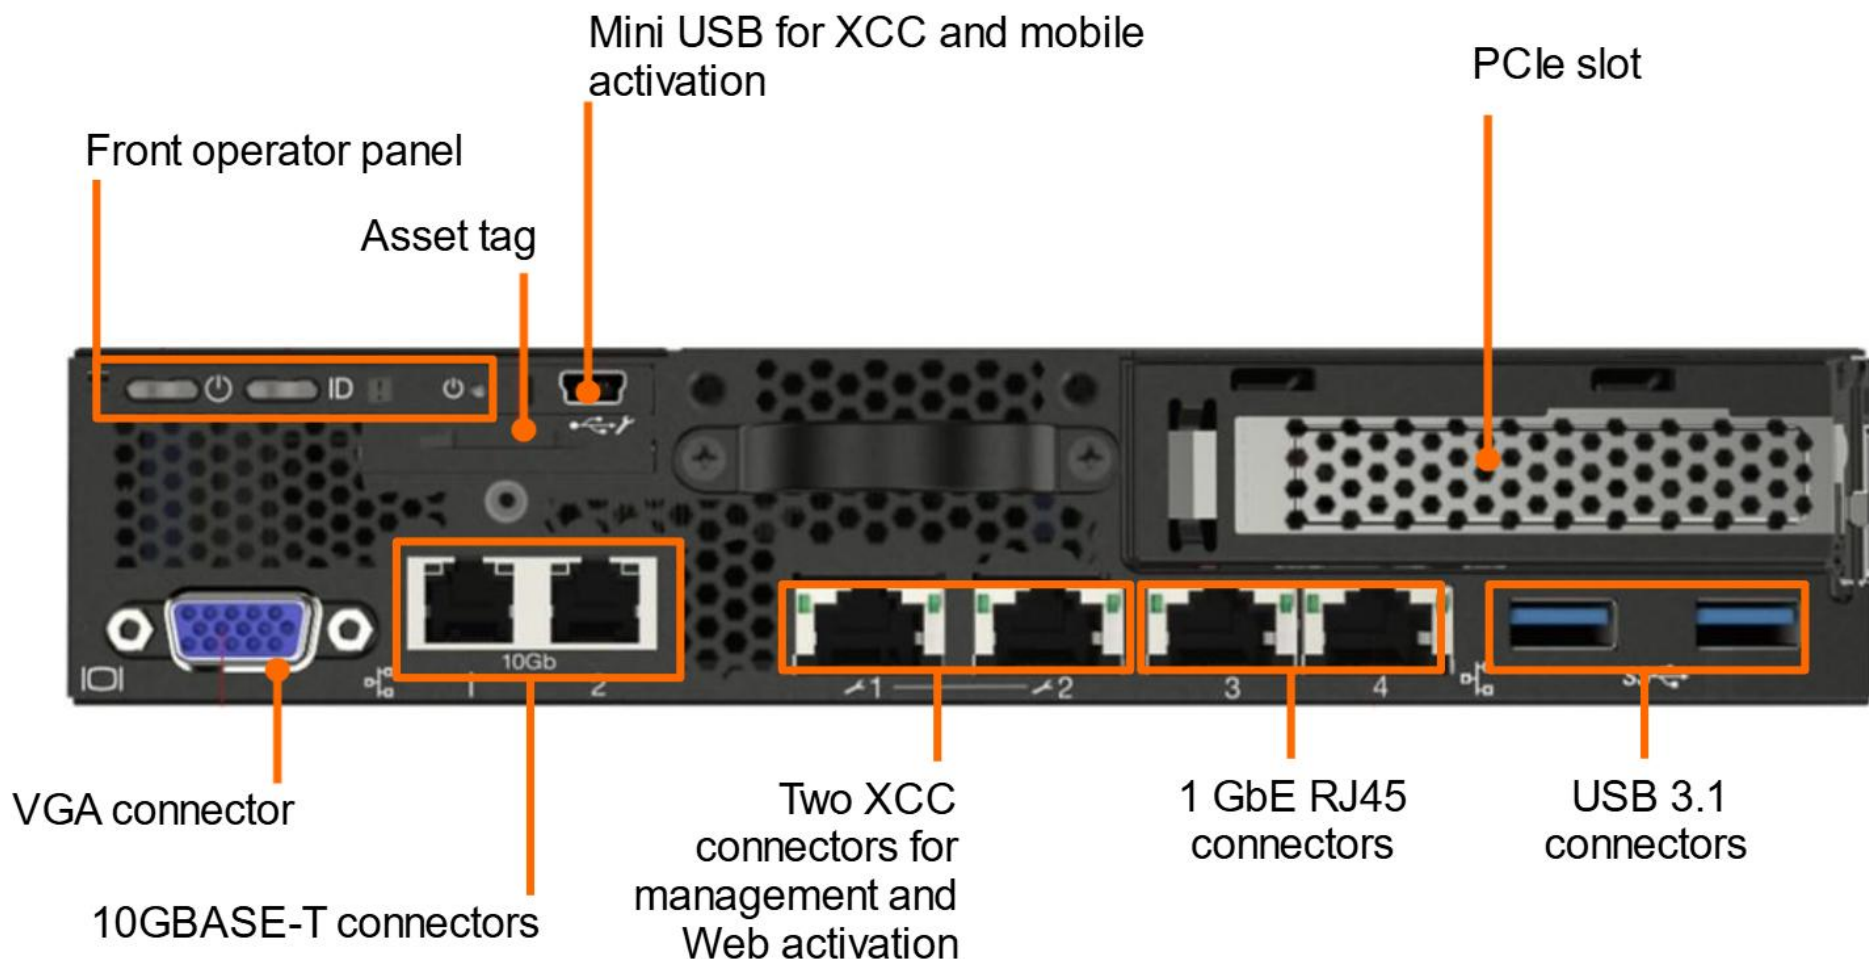


Front operator panel

The reset button is only available on the wireless-enabled LOM package model.

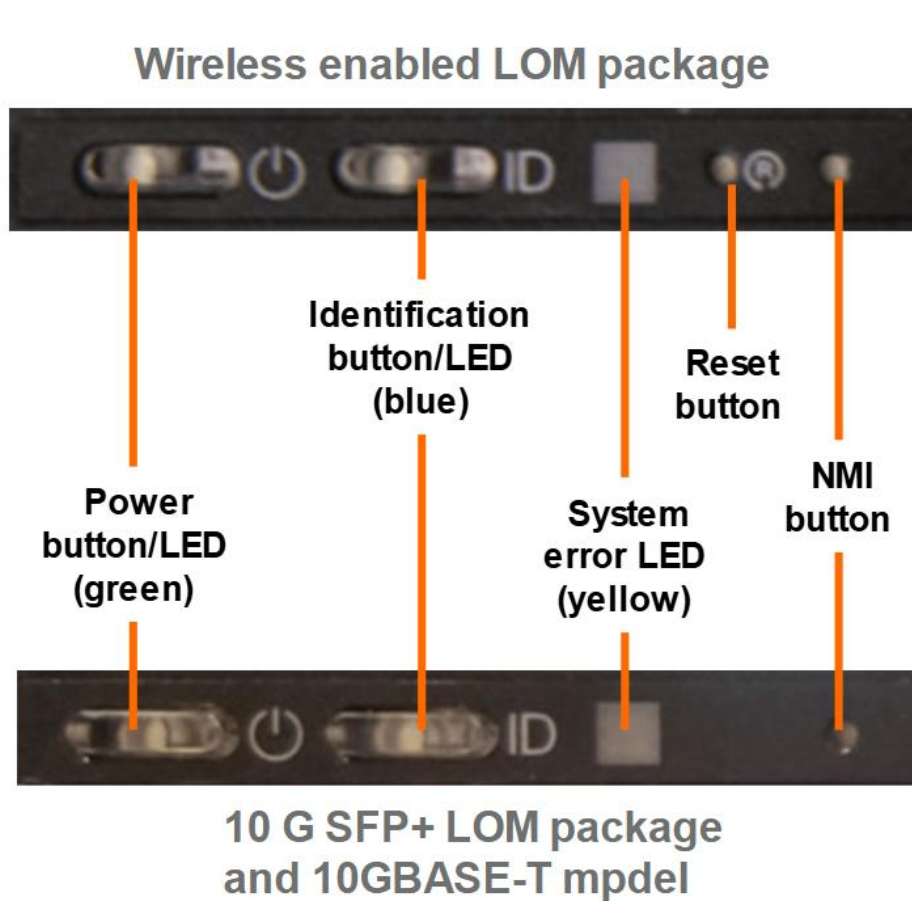


Power LED (green) System error LED (yellow)

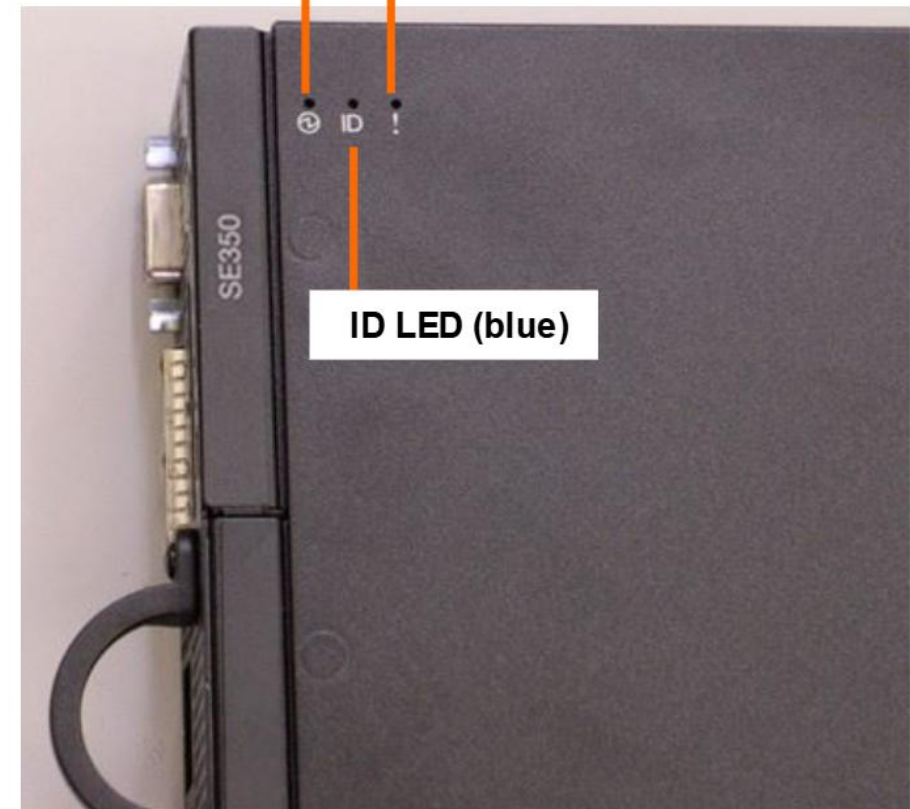

Shared XCC connectors

The 10 GbE SFP+ and 10GBASE-T models support two shared XCC connectors (marked with a wrench  icon) that support redundancy or daisy-chaining multiple SE350 servers together to reduce cabling requirements on the management LAN.

Note: XCC ports 1 and 2 can both be used for online activation using the ThinkShield Web application method, but XCC port 1 is preferred. For more information, refer to the [Internet connection \(online activation\)](#) section in this course.

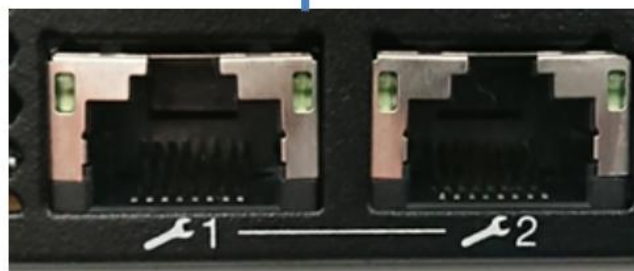

Rear view

Click each button to see more information.

12 V power
distribution module

-48 V power
distribution module

10 GbE SFP+ LOM
and 10GBASE-T
model

Rear view


Click each button to see more information.

12 V power
distribution module

-48 V power
distribution module

10 GbE SFP+ LOM
and 10GBASE-T
model

The WLAN and LTE antenna connectors are only available on the wireless-enabled LOM package model.

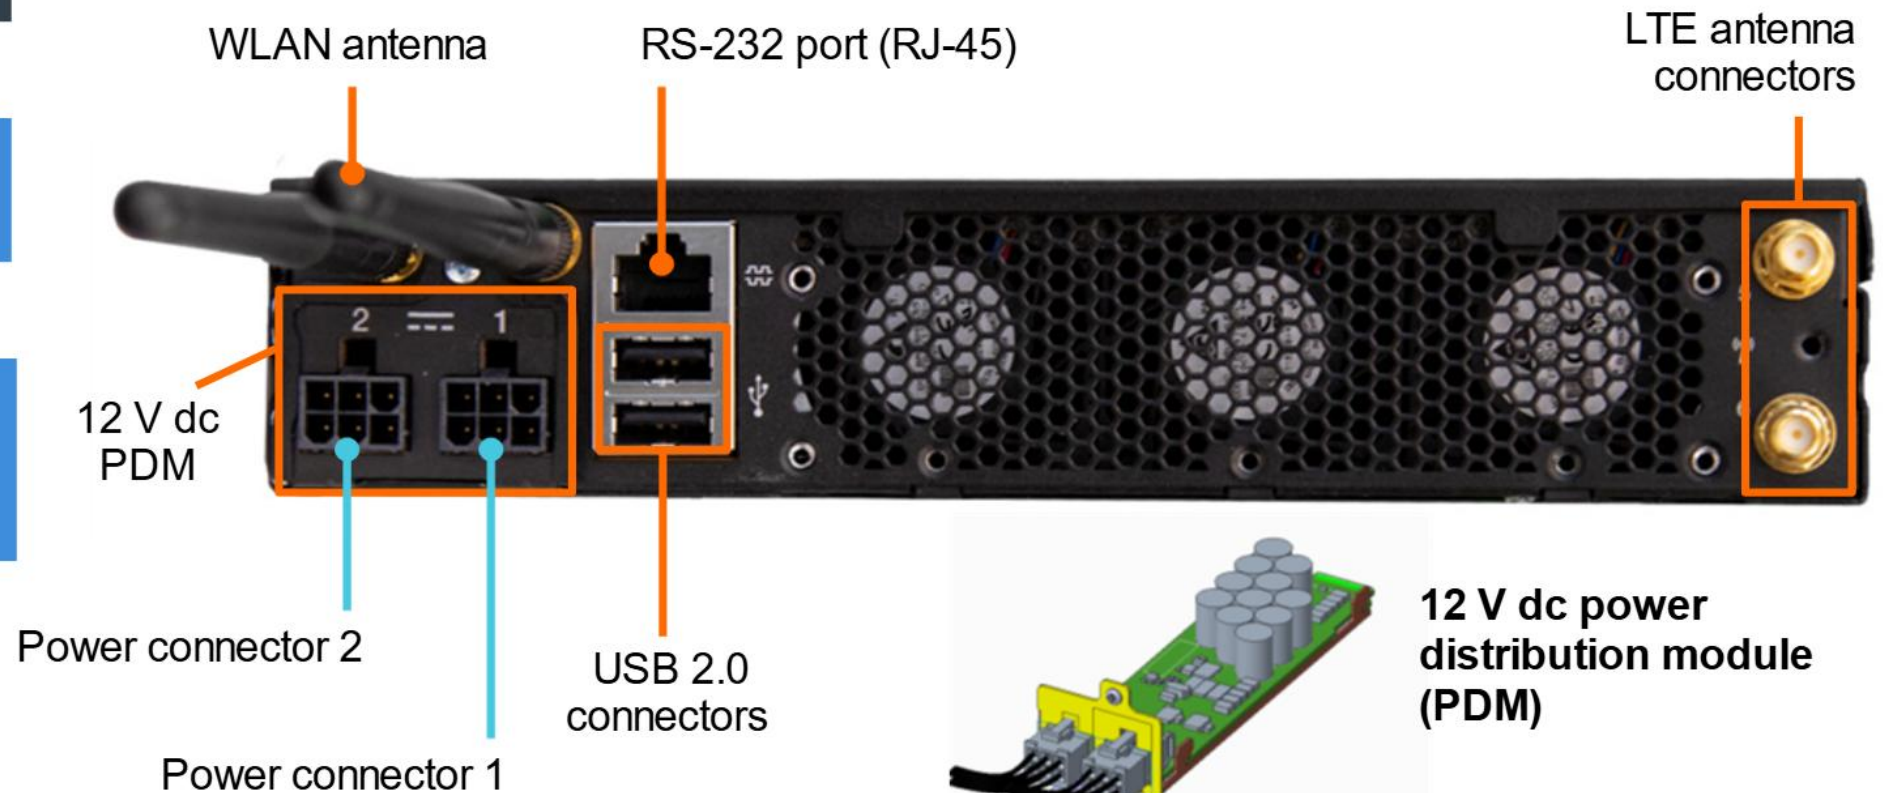

Rear view


Click each button to see more information.

12 V power
distribution module

-48 V power
distribution module

10 GbE SFP+ LOM
and 10GBASE-T
model

The WLAN and LTE antenna connectors are only available on the wireless-enabled LOM package model.

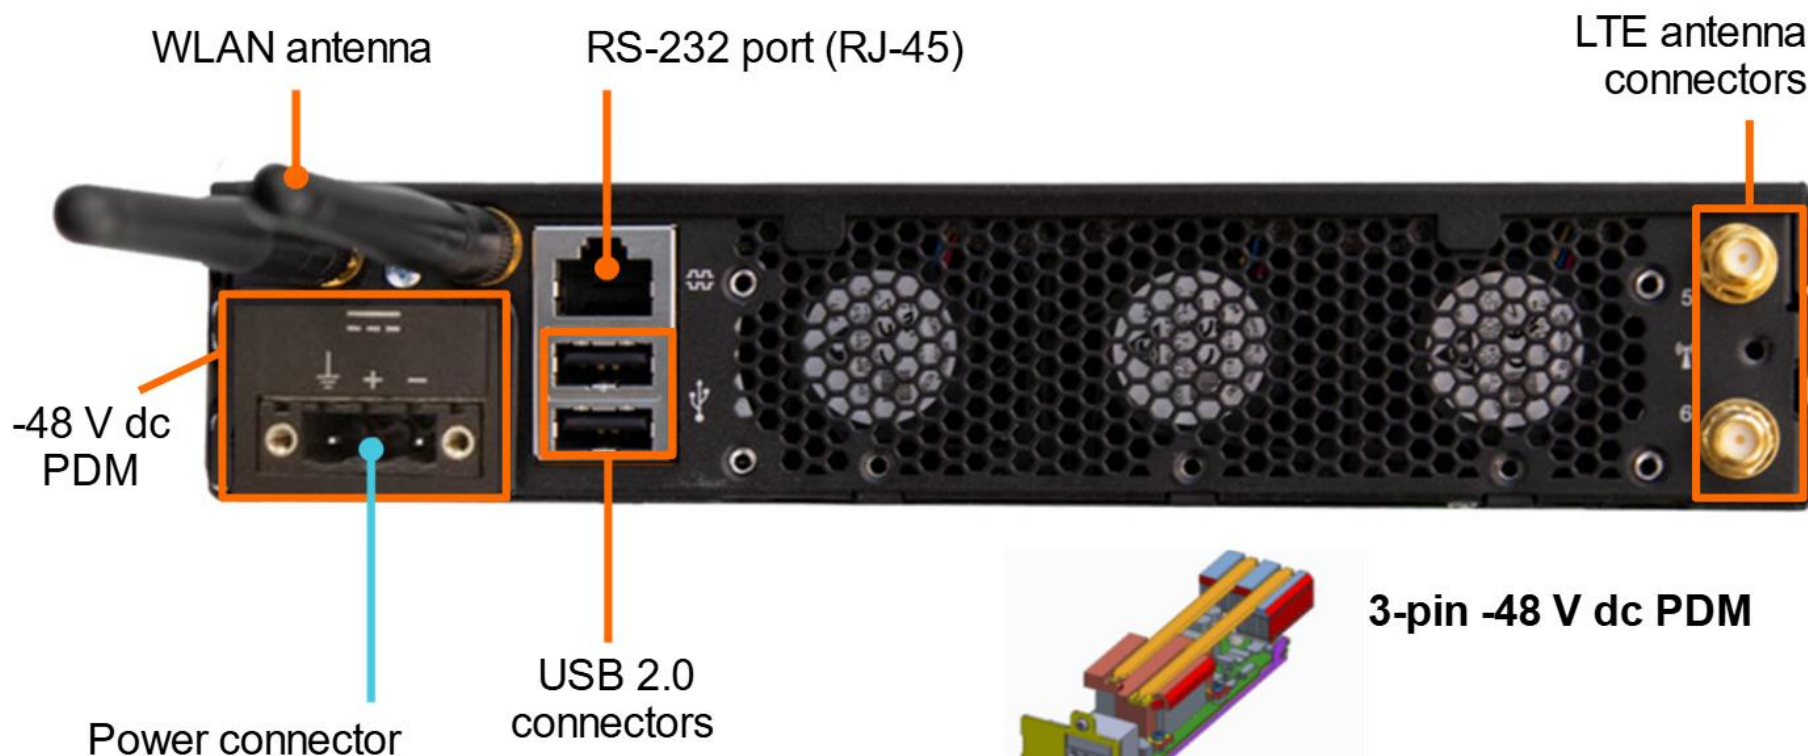

Rear view


Click each button to see more information.

12 V power
distribution module

-48 V power
distribution module

10 GbE SFP+ LOM
and 10GBASE-T
model

The 10 GbE SFP+ LOM package and 10GBASE-T model has no WLAN and LTE antenna connectors.

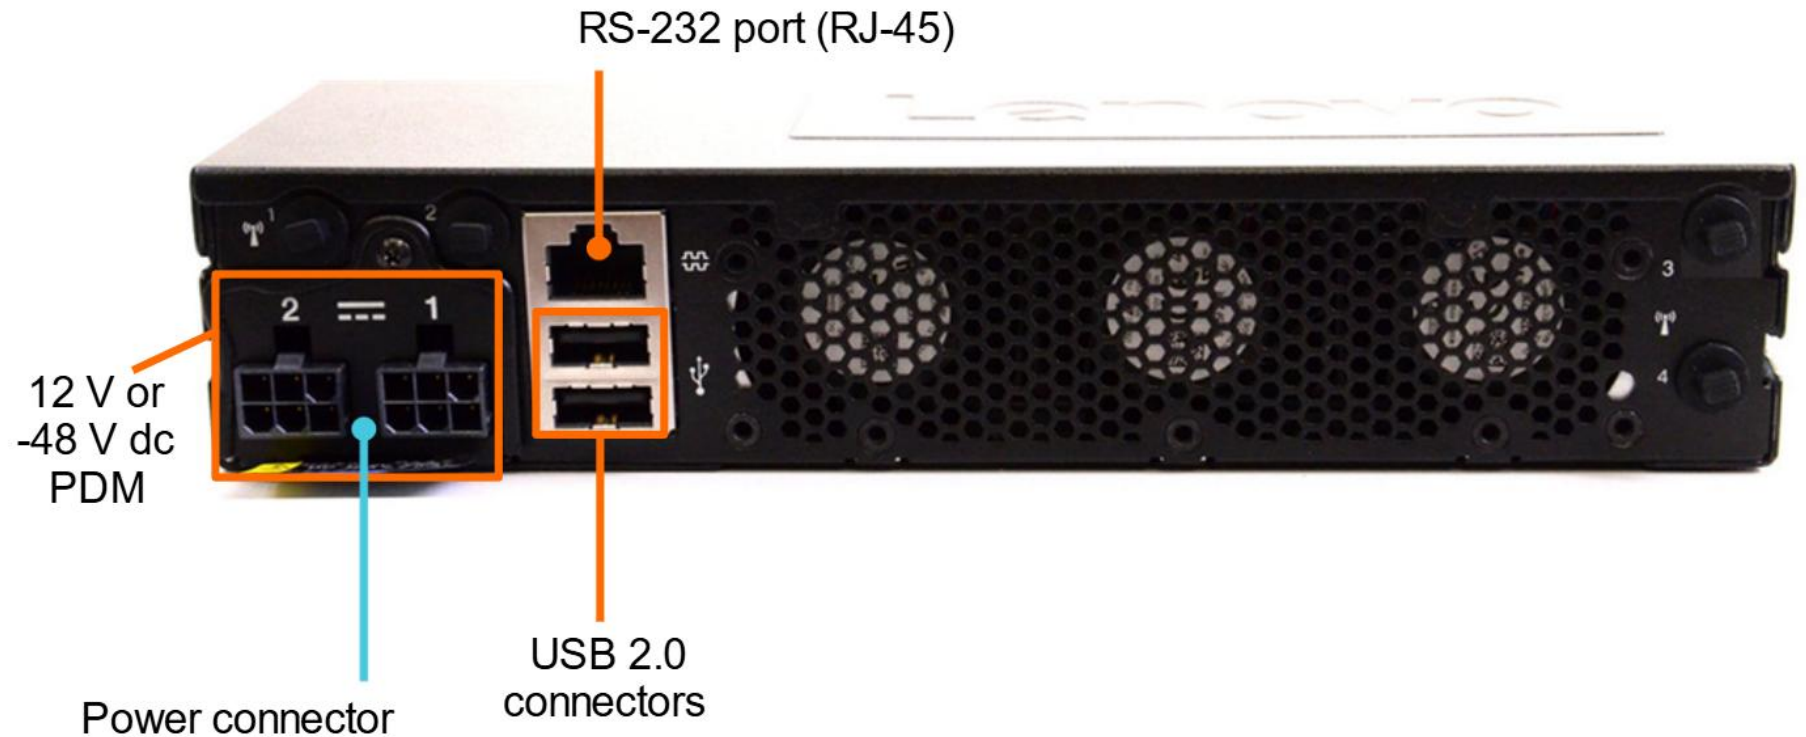


Inside view

Click each button to see more information.

With riser assembly

Without riser assembly

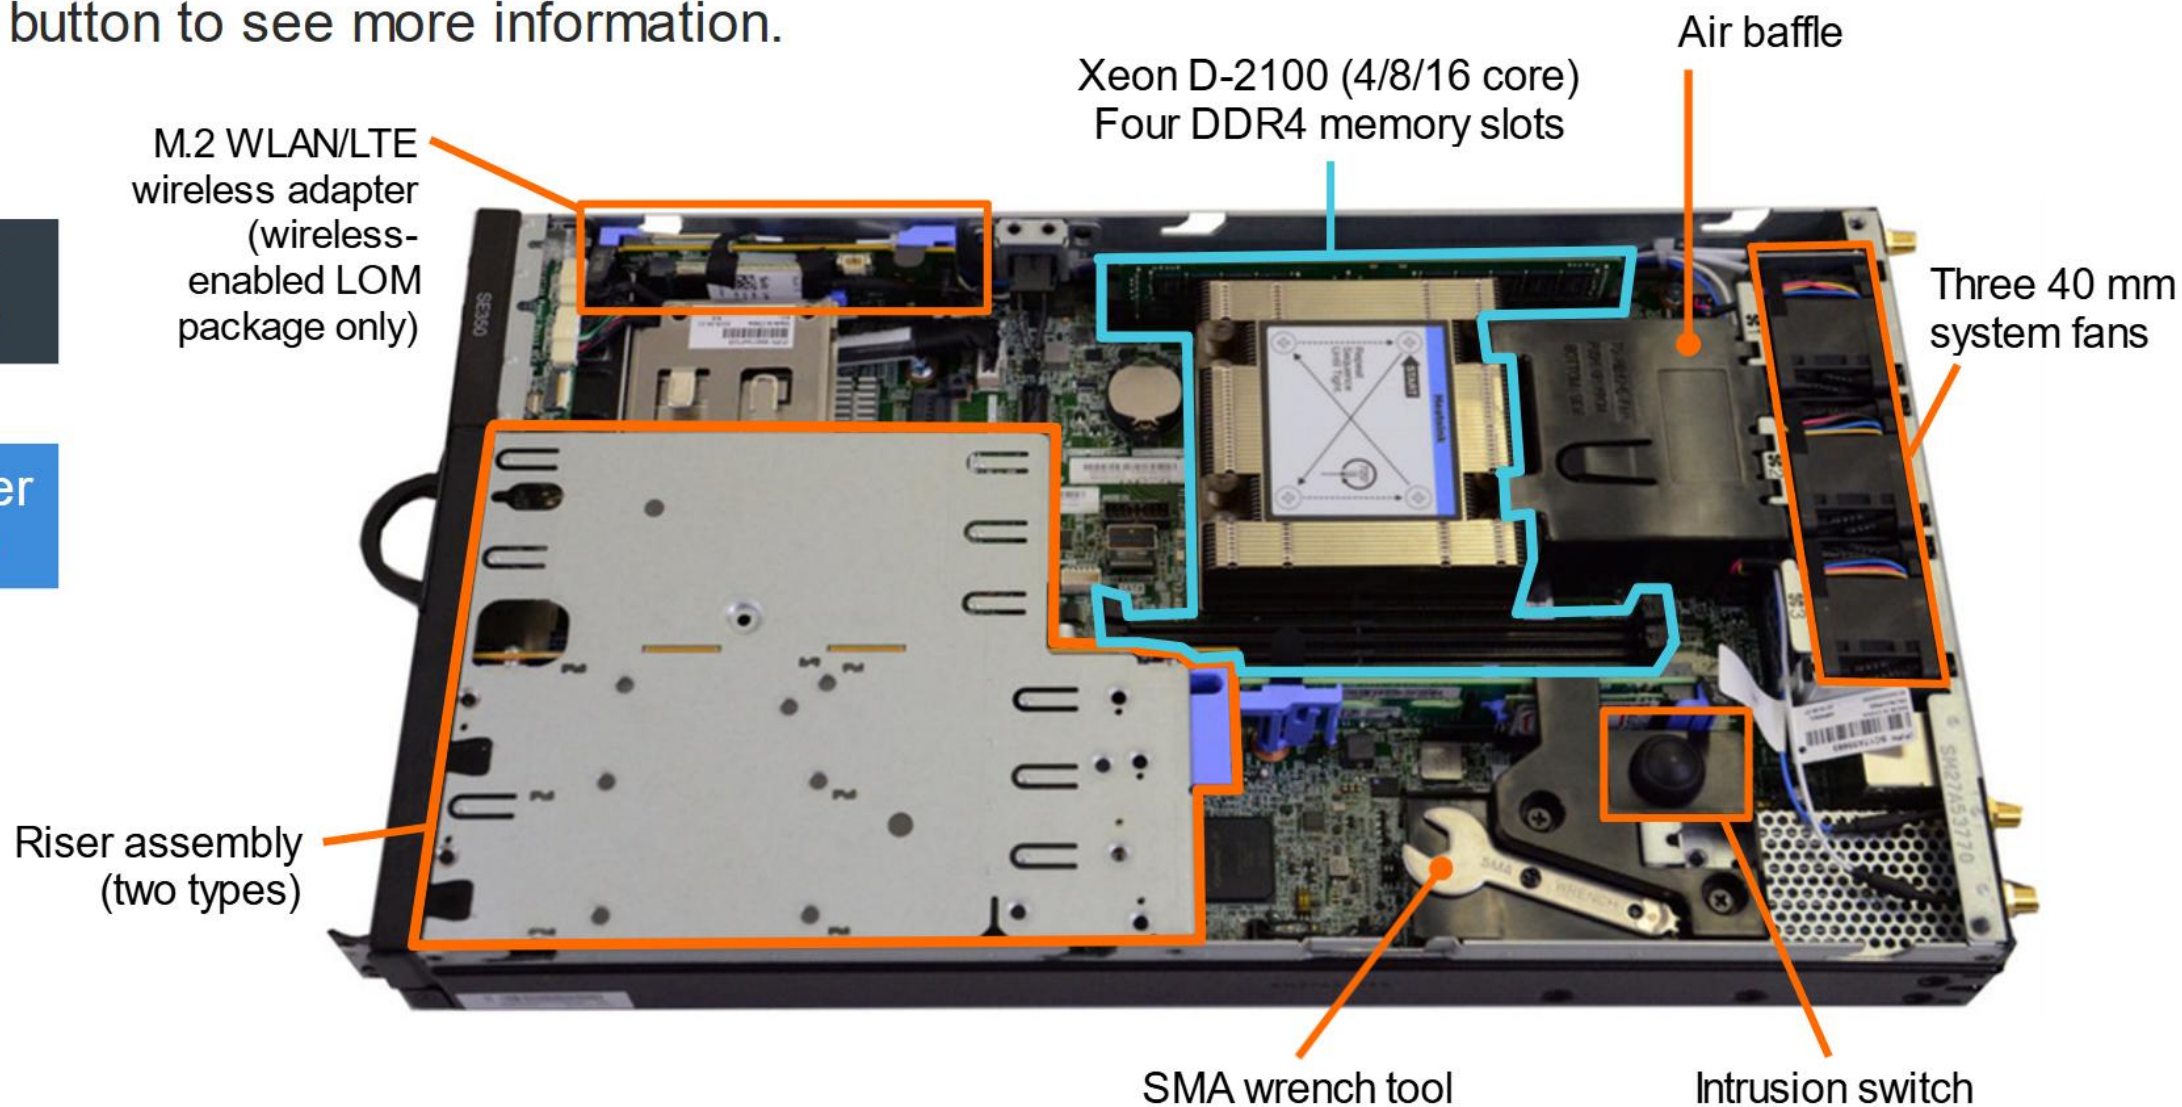

Inside view

Click each button to see more information.

With riser assembly

Without riser assembly

