

LXPM5 on ThinkSystem V4 servers

New features and enhancements

Lenovo

LXPM5 on ThinkSystem V4 servers

LXPM5 supports the same features and functions on the ThinkSystem V4 platform as LXPM4 did on the V3 platform. From a service perspective, the only difference is a greater number of supported servers and hardware components. The LXPM5 screen captures on the following slides show the tool's initial launch and key features.

LXPM5 – Initial launch

ThinkSystem SR630 V4

System Events ✖ 11 ▲ 0

Serial Number 0987654321

Machine Type 7DG8

BMC IP 10.245.39.120

UEFI Version 0.20 IHE103L (07/19/2024)

BMC Version 0.34 IHX403H (07/22/2024)

Lenovo

© 2024 Lenovo, All Rights Reserved

ThinkSystem

UEFI:DXE INIT

576 GB memory detected
Independent mode enabled, usable capacity 576 GB
F1 triggered remotely, preparing to boot into
System Setup...

TPM_POLICY is not locked

Undefined TPM_POLICY found

2 processor(s) detected, 128 cores enabled
Intel(R) Xeon(R) 6710E

F1: System Setup **F10: Network Boot**

F2: Diagnostic **F12: One Time Boot Device**

LXPM5 – System Summary

Provisioning Manager
System Summary
RAID Setup
OS Installation
Firmware Update
UEFI Setup
Cloning
Diagnostics
Effortless Reset
User Guide
Server Documentation
Tech Support

ThinkSystem SR630 V4, Processor board, BHS, 1U, Renesas
MTM: 7DG8CT02WW SN: 0987654321

System Summary

Product Name	ThinkSystem SR630 V4, Processor board, BHS, 1U, Renesas
UEFI Version	0.20 IHE103L
BMC Version	0.35 IHW403I
LXPM Version	5.00 DFL103J
Linux Driver Package	5.00 DFL201E
Windows Driver Package	5.00 DFL301F
Machine Type - Model	7DG8CT02WW
Serial Number	0987654321
UUID	C335860010E911E9D684745D22D069FF

CPU Information

CPU Count	2
CPU1 Name	Intel(R) Xeon(R) 6710E
CPU1 Family	Intel Xeon Processor
CPU1 Model	Sierra Forest
CPU1 Max Speed	3200 MHz
CPU1 Max Cores	64
CPU2 Name	Intel(R) Xeon(R) 6710E
CPU2 Family	Intel Xeon Processor
CPU2 Model	Sierra Forest
CPU2 Max Speed	3200 MHz
CPU2 Max Cores	64

DIMM Information

DIMM Total Count	20
DIMM Total Capacity	640 GB

System Summary

— PCI Adapter Information

PCI Adapter Count	2
ThinkSystem RAID 940-8i 8GB Flash PCIe Gen4 12Gb Adapter	SLOT3
Broadcom 5719 1GbE RJ45 4-port OCP Ethernet Adapter	SLOT6

— Disk Drive Information

Disk Drive Device Quantity	4
MODEL#:SSD5C2KG240G7L	SN#:BTYM73460EQQ240AGN
MODEL#:SSD5C2KG240G7L	SN#:BTYM73460EZ0240AGN
MODEL#:SSDPE2KX010T8L	SN#:BTLJ913505G11P0FGN
MODEL#:SSDPE2KX010T8L	SN#:BTLJ913504M01P0FGN

— Partition Information

Volume1 Name	Logical Device
Volume1 Size	223 GB
Partition Count	0
Volume2 Name	Logical Device
Volume2 Size	223 GB
Partition Count	0
Volume3 Name	Hard Disk
Volume3 Size	931 GB
Partition Count	4
Partition#1	FAT
Partition#2	FAT
Partition#3	FAT
Partition#4	FAT

LXPM5 – System Summary

Provisioning Manager

System Summary

RAID Setup

OS Installation

Firmware Update

UEFI Setup

Cloning

Diagnostics

Effortless Reset



User Guide



Server Documentation



Tech Support

ThinkSystem SR630 V4, Processor board, BHS, 1U, Renesas
MTM: 7DG8CT02WW SN: 0987654321

System Summary

Product Name	ThinkSystem SR630 V4, Processor board, BHS, 1U, Renesas
UEFI Version	0.20 IHE103L
BMC Version	0.35 IHW403I
LXPM Version	5.00 DFL103J
Linux Driver Package	5.00 DFL201E
Windows Driver Package	5.00 DFL301F
Machine Type - Model	7DG8CT02WW
Serial Number	0987654321
UUID	C335860010E911E9D684745D22D069FF

CPU Information

CPU Count	2
CPU1 Name	Intel(R) Xeon(R) 6710E
CPU1 Family	Intel Xeon Processor
CPU1 Model	Sierra Forest
CPU1 Max Speed	3200 MHz
CPU1 Max Cores	64
CPU2 Name	Intel(R) Xeon(R) 6710E
CPU2 Family	Intel Xeon Processor
CPU2 Model	Sierra Forest
CPU2 Max Speed	3200 MHz
CPU2 Max Cores	64

DIMM Information

DIMM Total Count	20
DIMM Total Capacity	640 GB
DIMM Total Speed	4800 MT/s

System Summary

— PCI Adapter Information

PCI Adapter Count	2
ThinkSystem RAID 940-8i 8GB Flash PCIe Gen4 12Gb Adapter	SLOT3
Broadcom 5719 1GbE RJ45 4-port OCP Ethernet Adapter	SLOT6

— Disk Drive Information

Disk Drive Device Quantity	4
MODEL#:SSD5C2KG240G7L	SN#:BTYM73460EQQ240AGN
MODEL#:SSD5C2KG240G7L	SN#:BTYM73460EZ0240AGN
MODEL#:SSDPE2KX010T8L	SN#:BTLJ913505G11P0FGN
MODEL#:SSDPE2KX010T8L	SN#:BTLJ913504M01P0FGN

— Partition Information

Volume1 Name	Logical Device
Volume1 Size	223 GB
Partition Count	0
Volume2 Name	Logical Device
Volume2 Size	223 GB
Partition Count	0
Volume3 Name	Hard Disk
Volume3 Size	931 GB
Partition Count	4
Partition#1	FAT
Partition#2	FAT
Partition#3	FAT
Partition#4	FAT

LXPM5 – OS Installation

Supported OSs are listed below:

Windows Server	WS2025
	WS2022
Windows Client	Win10
	Win11
VMWare	ESXi9.0
RHEL	RHEL9.4
	RHEL9.5
SLES	SLES15.6

Provisioning Manager

System Summary

RAID Setup

OS Installation

Firmware Update

UEFI Setup

Cloning

Diagnostics

Effortless Reset



User Guide

Server Documentation

Support

ThinkSystem SR630 V4, Processor board, BHS, 1U, Renesas
MTM: 7DGBCTO2WW SN: 0987654321

Guided Install

1 Drive Selection

2 OS Selection

3 Installation Settings

4 Partition Options

5 Summary

OS Family

OS Edition

OS Image

Protocol

IP Address

User Name

Password

Path

File Name

Windows

Windows Server 2022 Standard

Windows Server 2022 Standard

Windows Server 2022 Datacenter

Windows Server 2025 Standard

Windows Server 2025 Datacenter

Windows 10 Enterprise

Windows 10 Enterprise N

Windows 11 Enterprise

Windows 11 Enterprise N

Windows 11 Pro for Workstations

Windows 11 Pro N for Workstations

Quit Wizard

Previous

Next

LXPM5 – Firmware Update

Provisioning Manager

System Summary

RAID Setup

OS Installation

Firmware Update

UEFI Setup

Cloning

Diagnostics

Effortless Reset



User Guide

Server Documentation

Tech Support

ThinkSystem SR630 V4, Processor board, BHS, 1U, Renesas
MTM: 7DG8CT02WW SN: 0987654321

Firmware Update


Firmware level of key components in the server are shown in the table. You may browse to your update packages on network share or USB drive, and then update them all or selectively. If you need to update firmware to all components including add-on adapters and hard drives, use the management controller interface or other tools.

	Component	Installed Version	Available Version	Status
☐	UEFI	IHE103L		
☐	XCC (management controller)	IHX403I		
☐	XClarity Provisioning Manager	DFL103J		
☐	Windows Driver Bundle	DFL301F		
☐	Linux Driver Bundle	DFL201E		

Browse Update Package...

Update

LXPM5 – UEFI Setup

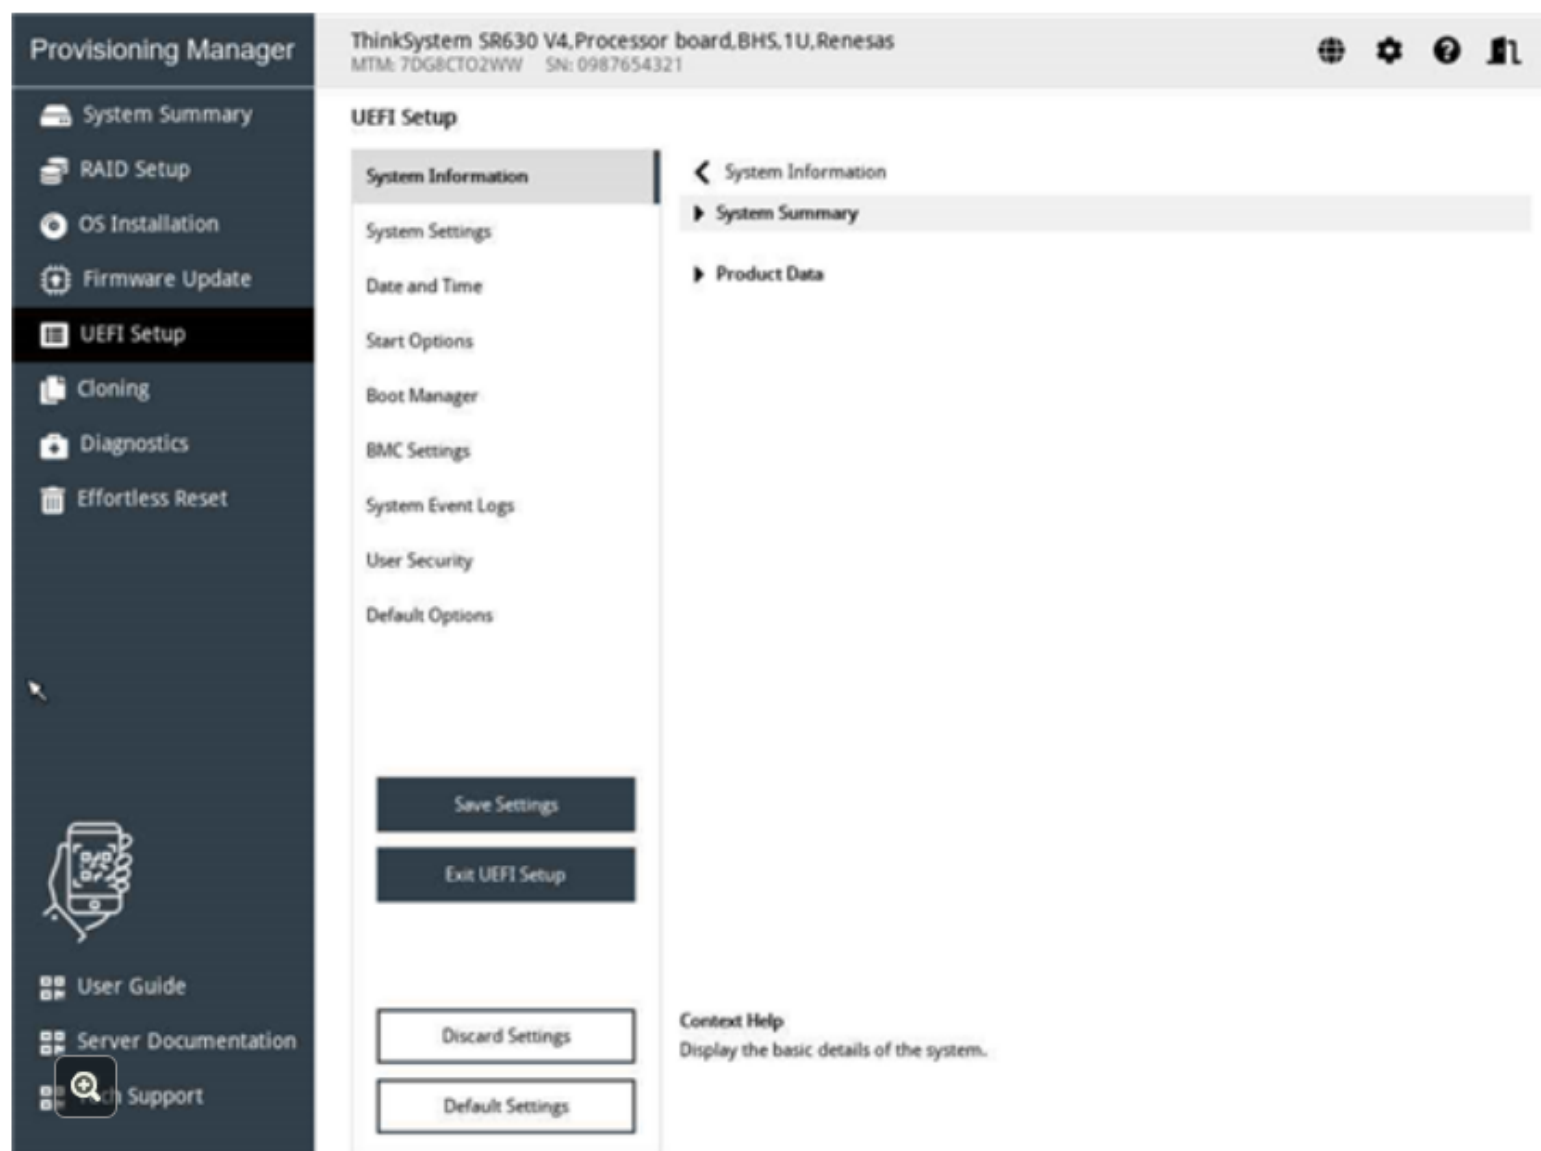

LXPM5 – Cloning

Provisioning Manager

System Summary

RAID Setup

OS Installation

Firmware Update

UEFI Setup

Cloning

Diagnostics

Effortless Reset



User Guide

Server Documentation

Tech Support

ThinkSystem SR630 V4, Processor board, BHS, 1U, Renesas
MTM: 7DG8CTO2WW SN: 0987654321



Cloning

Export – Save current settings to files

☒ UEFI

Browse

☐ RAID

Browse

☐ BMC

Browse

Export

Import – Apply settings from files

☐ UEFI

Browse

☐ RAID

Browse

☐ BMC

Browse

☐ OS Installation

Browse

Import

LXPM5 – Diagnostics

The screenshot displays the LXPM5 Provisioning Manager web interface. On the left is a dark sidebar with a list of navigation options: System Summary, RAID Setup, OS Installation, Firmware Update, UEFI Setup, Cloning, Diagnostics (highlighted with a white background), and Effortless Reset. Below these are icons for User Guide, Premier Documentation, and Tech Support. The main content area has a header bar showing 'ThinkSystem SR630 V4, Processor board, BHS, 1U, Renesas' and system identifiers. Below the header, the 'Diagnostics' section is active, displaying the instruction 'Select one of the following actions:'. Three options are listed with expandable arrows: 'Effortless Diagnostics' (highlighted with a blue border), 'Run Diagnostics', and 'Collect Service Data'. Each option has a brief description of its function.

Provisioning Manager

ThinkSystem SR630 V4, Processor board, BHS, 1U, Renesas
MTM: 7DG8CT02WW SN: 0987654321

Diagnostics

Select one of the following actions:

- > Effortless Diagnostics**
Run diagnostics test, collect service data and RAID log, automatically save the log files.
- > Run Diagnostics**
Check the system health, view active events, or test the memory and hard disk drives installed in the system.
- > Collect Service Data**
Select the type of service log to download.

User Guide
Premier Documentation
Tech Support

LXPM5 – Diagnostics – Hardware Health

The screenshot displays the LXPM5 Hardware Health interface. The top header shows the system information: "ThinkSystem SR630 V4, Processor board.BHS.1U,Reneasas" and "MTM: 7DG8CTO2WW SN: 0987654321". The left sidebar contains navigation options: "Provisioning Manager", "Hardware Health" (selected), "Memory Test", "Disk Drive Test", and "RAID Log". The main content area is titled "Hardware Health" and is divided into two sections: "Health Summary" and "Active System Events (10)". The "Health Summary" section displays a grid of component status icons: CPU (green checkmark), Memory (red exclamation mark), Storage (green checkmark), PCI (green checkmark), Power Supply (green checkmark), Fan (red exclamation mark), System Board (green checkmark), and Others (yellow warning triangle). A "Refresh" button is located at the bottom right of the grid.

Component	Status
CPU	OK (Green Checkmark)
Memory	Warning (Red Exclamation Mark)
Storage	OK (Green Checkmark)
PCI	OK (Green Checkmark)
Power Supply	OK (Green Checkmark)
Fan	Warning (Red Exclamation Mark)
System Board	OK (Green Checkmark)
Others	Warning (Yellow Triangle)

LXPM5 – Diagnostics – Memory Test

Provisioning Manager

Hardware Health

Memory Test

Disk Drive Test

RAID Log

ThinkSystem SR630 V4,Processor board,BHS,1U,Renesas
MTM: 7DG8CTO2WW SN: 0987654321

Memory Test

Test Scope

☒ Test by cycles

Cycles (1-9999)

☐ Test by time

Minutes (1-1440)

Test Strength

☒ Quick Test

☐ Full Test

☐ Advanced Memory Test

Log Location:

Run

LXPM5 – Diagnostics – Drive Test

Provisioning Manager

Hardware Health

Memory Test

Disk Drive Test

RAID Log

ThinkSystem SR630 V4, Processor board, BHS, 1U, Renesas
MTM: 7DG8CT02WW SN: 0987654321

Disk Drive Test

Test Strength

☒ Short Self Test

☐ Long Self Test

Test Status

The Disk Drive Test will take a few minutes.

☒	Model Number	Serial Number	Status	Duration
☒	SSD5C2KG240G7L	BTYM73460EQQ240AGN	Ready	0 seconds
☒	SSD5C2KG240G7L	BTYM73460E20240AGN	Ready	0 seconds
☒	SSDPE2XX010T8L	BTJ913505G11P0FGN	Ready	0 seconds
☒	SSDPE2XX010T8L	BTJ913504M01P0FGN	Ready	0 seconds

Press ESC key to abort testing

Log Location:

Run

Save

LXPM5 – Diagnostics – RAID Log

Provisioning Manager

Hardware Health

Memory Test

Disk Drive Test

RAID Log

ThinkSystem SR630 V4, Processor board, BHS, 1U, Renesas
MTM: 7DG8CTO2WW SN: 0987654321

RAID Log

Select RAID Adapter

☒	Select RAID Adapter	Serial Number	Disk Drive Device Quantity	Virtual Disks Device Quantity	Status
☒	RAID 940-8i 8GB Flash	SK01076057	2	0	Ready

Log Location:

RunSave

LXPM5 – Effortless Reset

Provisioning Manager

System Summary

RAID Setup

OS Installation

Firmware Update

UEFI Setup

Cloning

Diagnostics

Effortless Reset

User Guide

Server Documentation

Tech Support

ThinkSystem SR630 V4,Processor board,BHS,1U,Renesas
MTM: 7DG8CT02WW SN: 0987654321

Effortless Reset

Permanently erase all data on internal storage devices, clear all system logs, reset all system firmware to factory default including credentials and network settings.Please remove all the external storage devices and other unsupported storages before executing the function.

BMC Authentication

User:

Password:

OK

Note: Ensure that the BMC user account is currently valid for web login. If the account password is expired, or is set to change password at next login, then authentication will fail.
If authentication fails here, try to login to the BMC web interface to correct the situation, then retry this function again.

Summary

This course enabled you to:

- Describe the new features of the software tools supported by ThinkSystem V4 servers
- Describe the difference of the software tools between ThinkSystem V3 and V4 servers
- Describe the features introduced in the newer versions of existing software tools that support ThinkSystem servers