


Pruebas de conectividad

PC-CIT-CONG-01

Comandos: ipconfig /all; ping 172.23.24.1; ping 172.23.28.226; ping 200.1.1.1

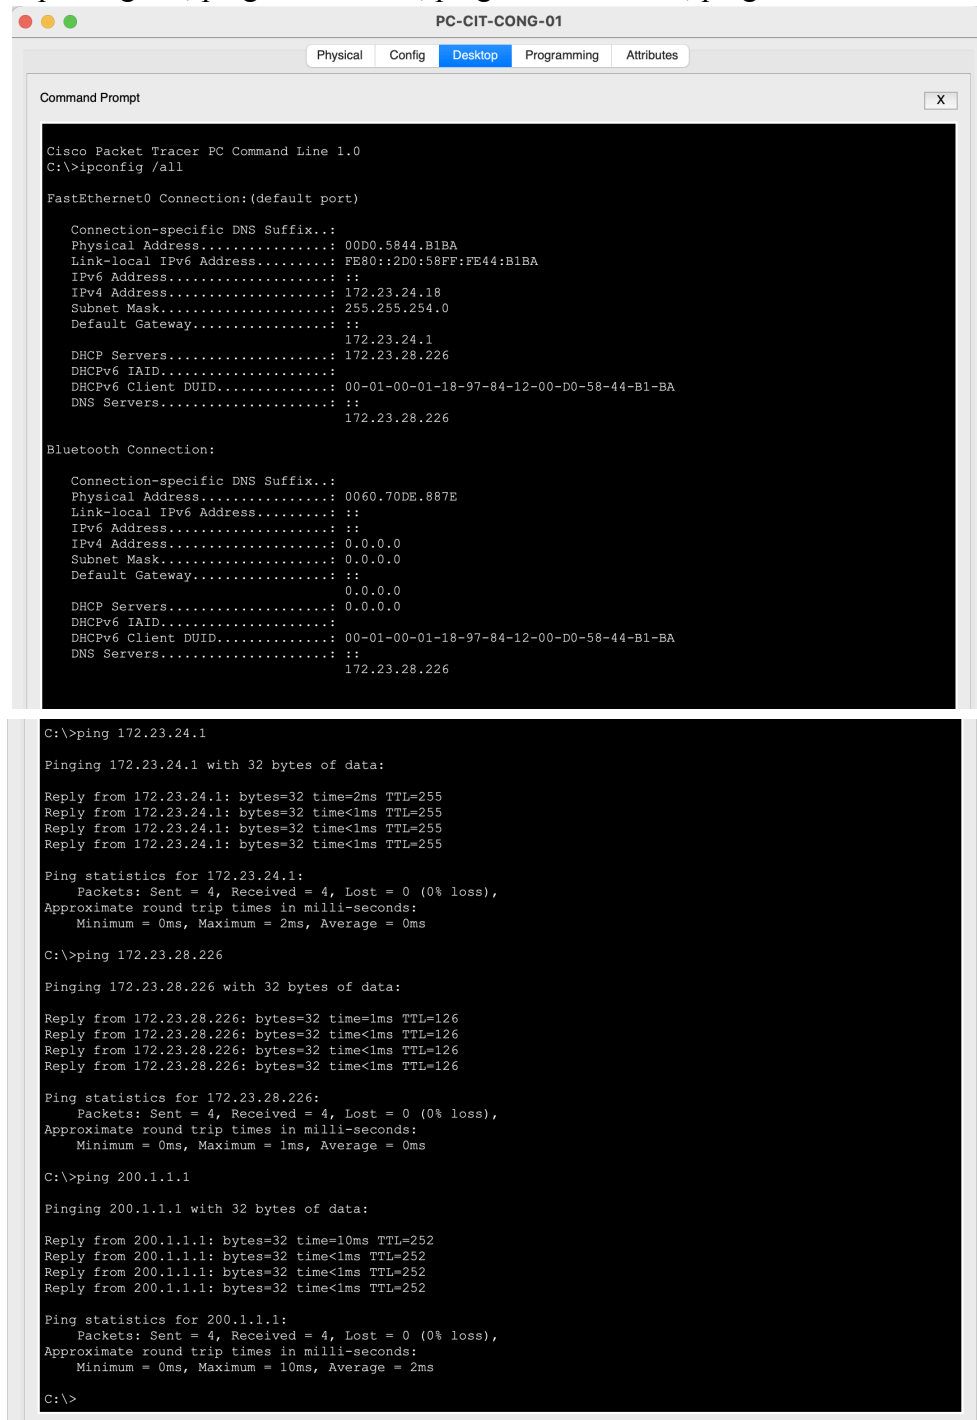

```
PC-CIT-CONG-01
Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection: (default port)

Connection-specific DNS Suffix...:
Physical Address.....: 00D0.5844.B1BA
Link-local IPv6 Address.....: FE80::2D0:58FF:FE44:B1BA
IPv6 Address.....: ::
IPv4 Address.....: 172.23.24.18
Subnet Mask.....: 255.255.254.0
Default Gateway.....: ::
172.23.24.1
DHCP Servers.....: 172.23.28.226
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-18-97-84-12-00-D0-58-44-B1-BA
DNS Servers.....: ::
172.23.28.226

Bluetooth Connection:

Connection-specific DNS Suffix...:
Physical Address.....: 0060.70DE.887E
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
DHCP Servers.....: 0.0.0.0
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-18-97-84-12-00-D0-58-44-B1-BA
DNS Servers.....: ::
172.23.28.226

C:\>ping 172.23.24.1

Pinging 172.23.24.1 with 32 bytes of data:

Reply from 172.23.24.1: bytes=32 time=2ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 2ms, Average = 0ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time=1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:


Reply from 200.1.1.1: bytes=32 time=10ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 2ms

C:\>
```

PC-CIT-CONG-02

Comandos: ipconfig /all; ping 172.23.24.1; ping 172.23.28.226; ping 200.1.1.1

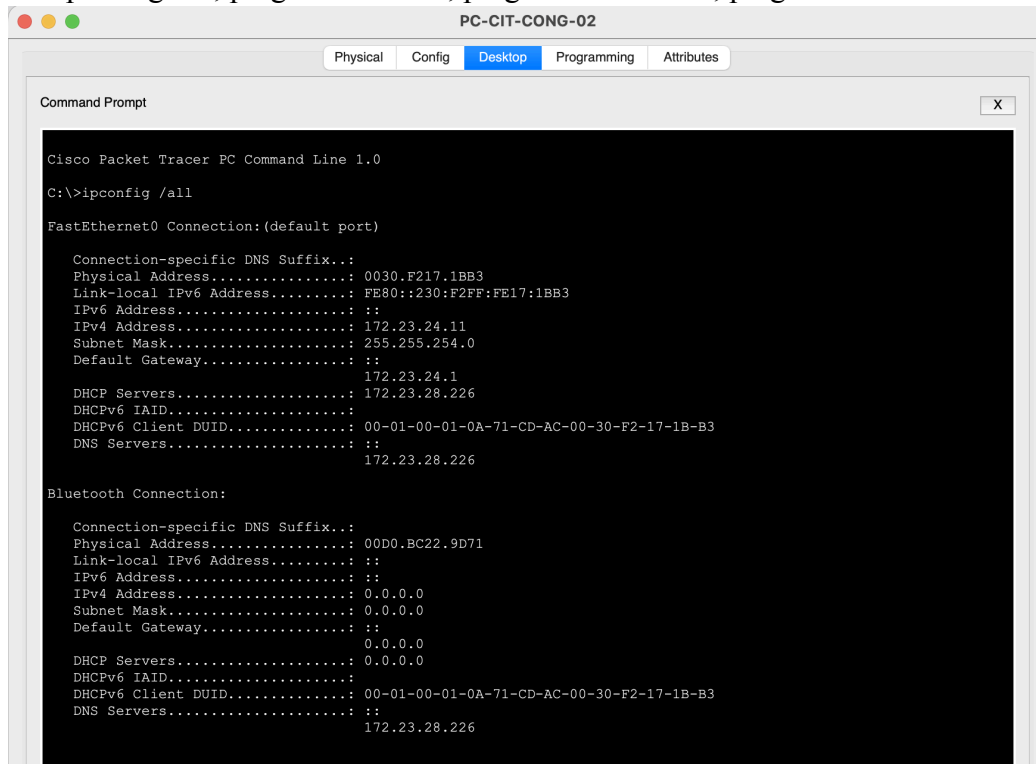

```
PC-CIT-CONG-02
Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0


C:\>ipconfig /all

FastEthernet0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Physical Address...: 0030.F217.1BB3
    Link-local IPv6 Address...: FE80::230:F2FF:FE17:1BB3
    IPv6 Address...: ::
    IPv4 Address...: 172.23.24.11
    Subnet Mask...: 255.255.254.0
    Default Gateway...: ::
                        172.23.24.1
    DHCP Servers...: 172.23.28.226
    DHCPv6 IAID...:
    DHCPv6 Client DUID...: 00-01-00-01-0A-71-CD-AC-00-30-F2-17-1B-B3
    DNS Servers...: ::
                        172.23.28.226

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Physical Address...: 00D0.BC22.9D71
    Link-local IPv6 Address...: ::
    IPv6 Address...: ::
    IPv4 Address...: 0.0.0.0
    Subnet Mask...: 0.0.0.0
    Default Gateway...: ::
                        0.0.0.0
    DHCP Servers...: 0.0.0.0
    DHCPv6 IAID...:
    DHCPv6 Client DUID...: 00-01-00-01-0A-71-CD-AC-00-30-F2-17-1B-B3
    DNS Servers...: ::
                        172.23.28.226
```

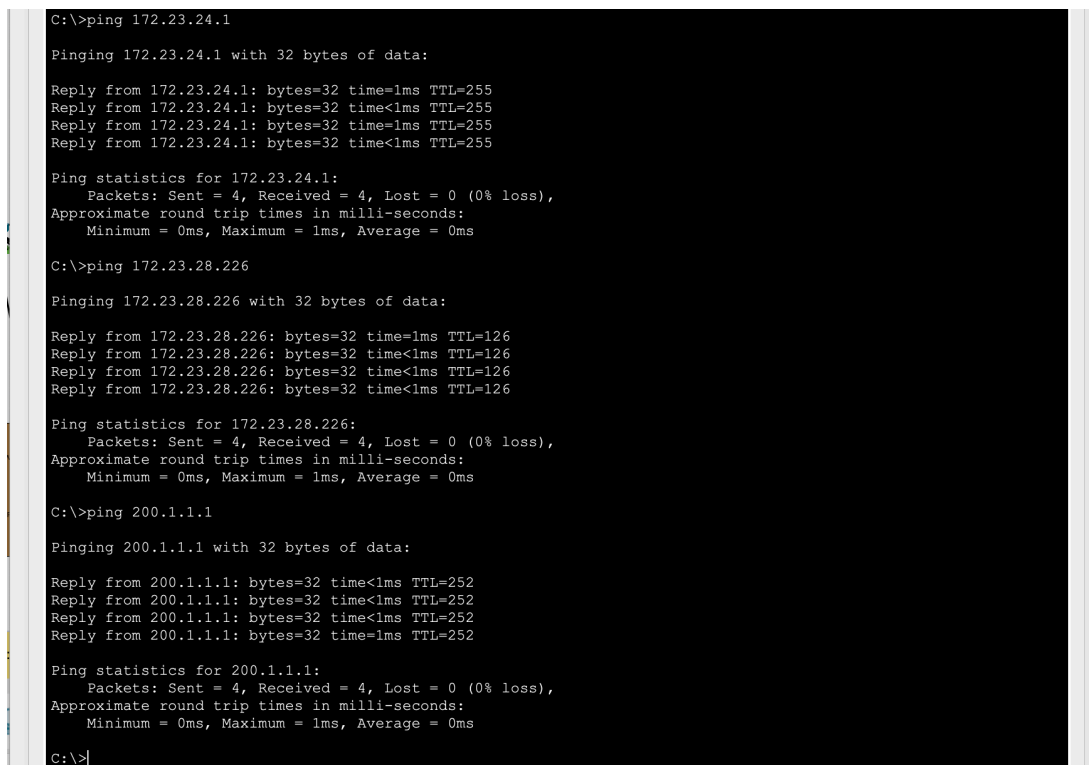

```
C:\>ping 172.23.24.1

Pinging 172.23.24.1 with 32 bytes of data:

Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:


Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

PC-CIT-CONG-03

Comandos: ipconfig /all; ping 172.23.24.1; ping 172.23.28.226; ping 200.1.1.1

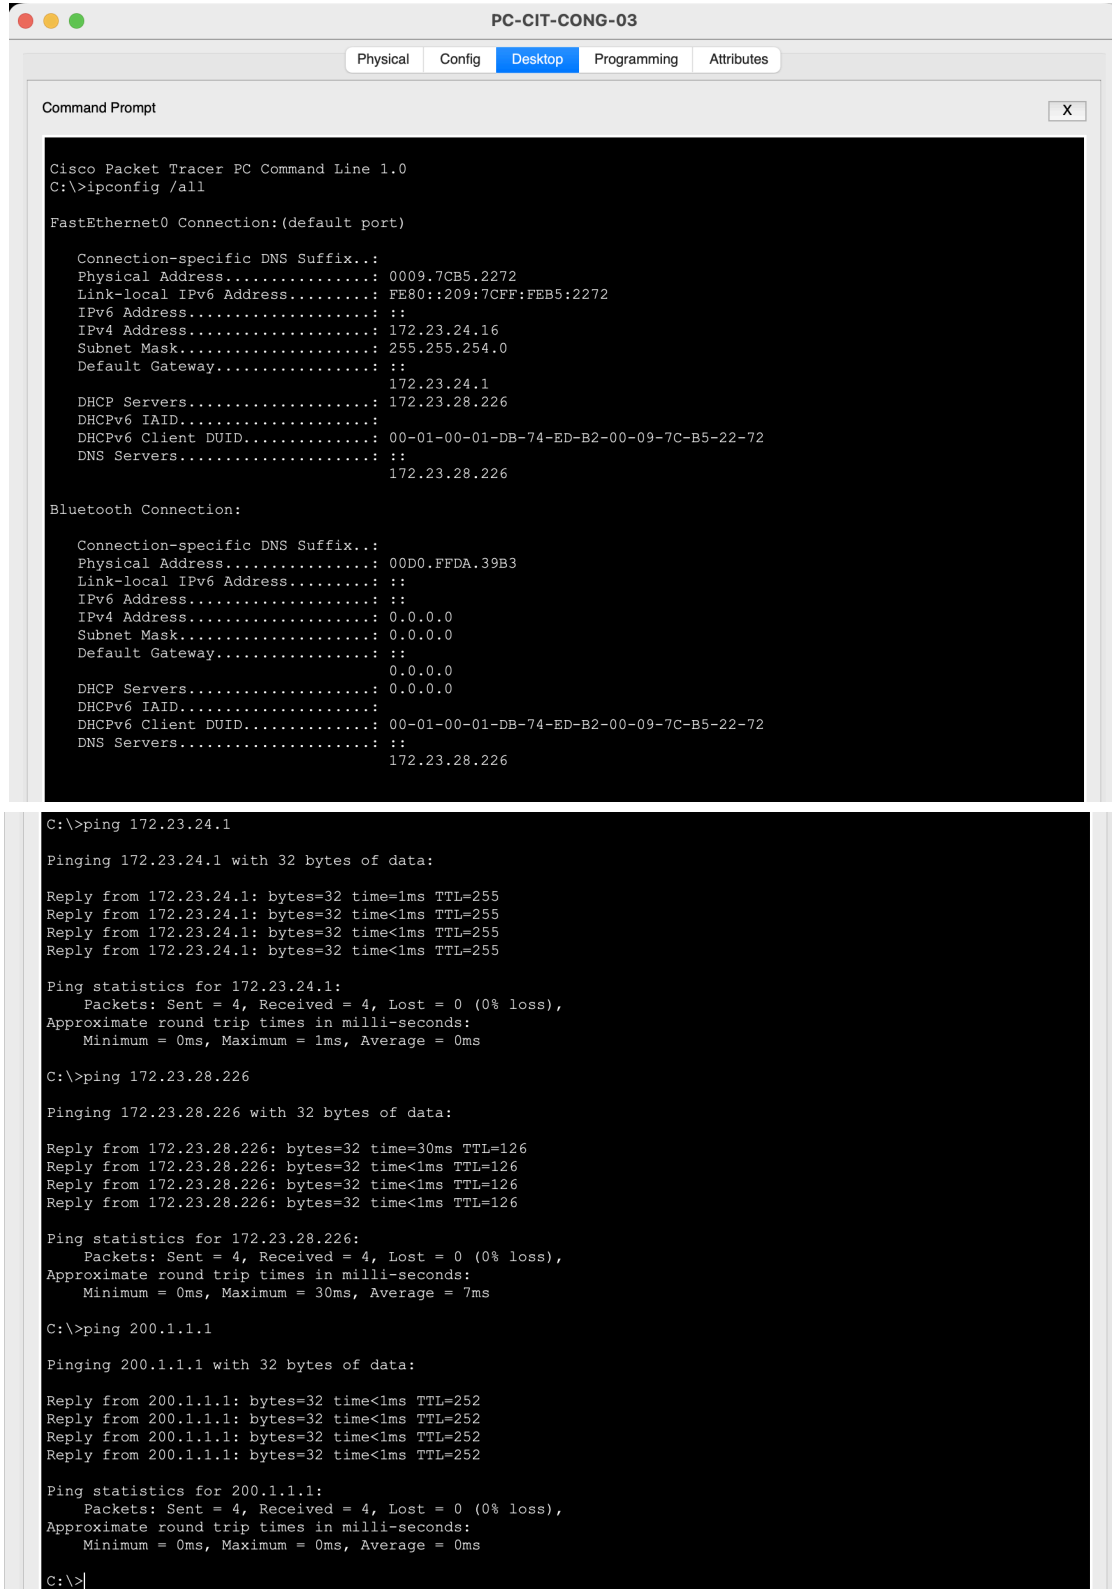

```
PC-CIT-CONG-03
Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection: (default port)

Connection-specific DNS Suffix.:
Physical Address.: 0009.7CB5.2272
Link-local IPv6 Address.: FE80::209:7CFE:FEB5:2272
IPv6 Address.: ::
IPv4 Address.: 172.23.24.16
Subnet Mask.: 255.255.254.0
Default Gateway.: ::
172.23.24.1
DHCP Servers.: 172.23.28.226
DHCPv6 IAID.:
DHCPv6 Client DUID.: 00-01-00-01-DB-74-ED-B2-00-09-7C-B5-22-72
DNS Servers.: ::
172.23.28.226

Bluetooth Connection:

Connection-specific DNS Suffix.:
Physical Address.: 00D0.FFDA.39B3
Link-local IPv6 Address.: ::
IPv6 Address.: ::
IPv4 Address.: 0.0.0.0
Subnet Mask.: 0.0.0.0
Default Gateway.: ::
0.0.0.0
DHCP Servers.: 0.0.0.0
DHCPv6 IAID.:
DHCPv6 Client DUID.: 00-01-00-01-DB-74-ED-B2-00-09-7C-B5-22-72
DNS Servers.: ::
172.23.28.226

C:\>ping 172.23.24.1

Pinging 172.23.24.1 with 32 bytes of data:

Reply from 172.23.24.1: bytes=32 time=1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time=30ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 30ms, Average = 7ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:


Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```

PC-CIT-CONG-04

Comandos: ipconfig /all; ping 172.23.24.1; ping 172.23.28.226; ping 200.1.1.1

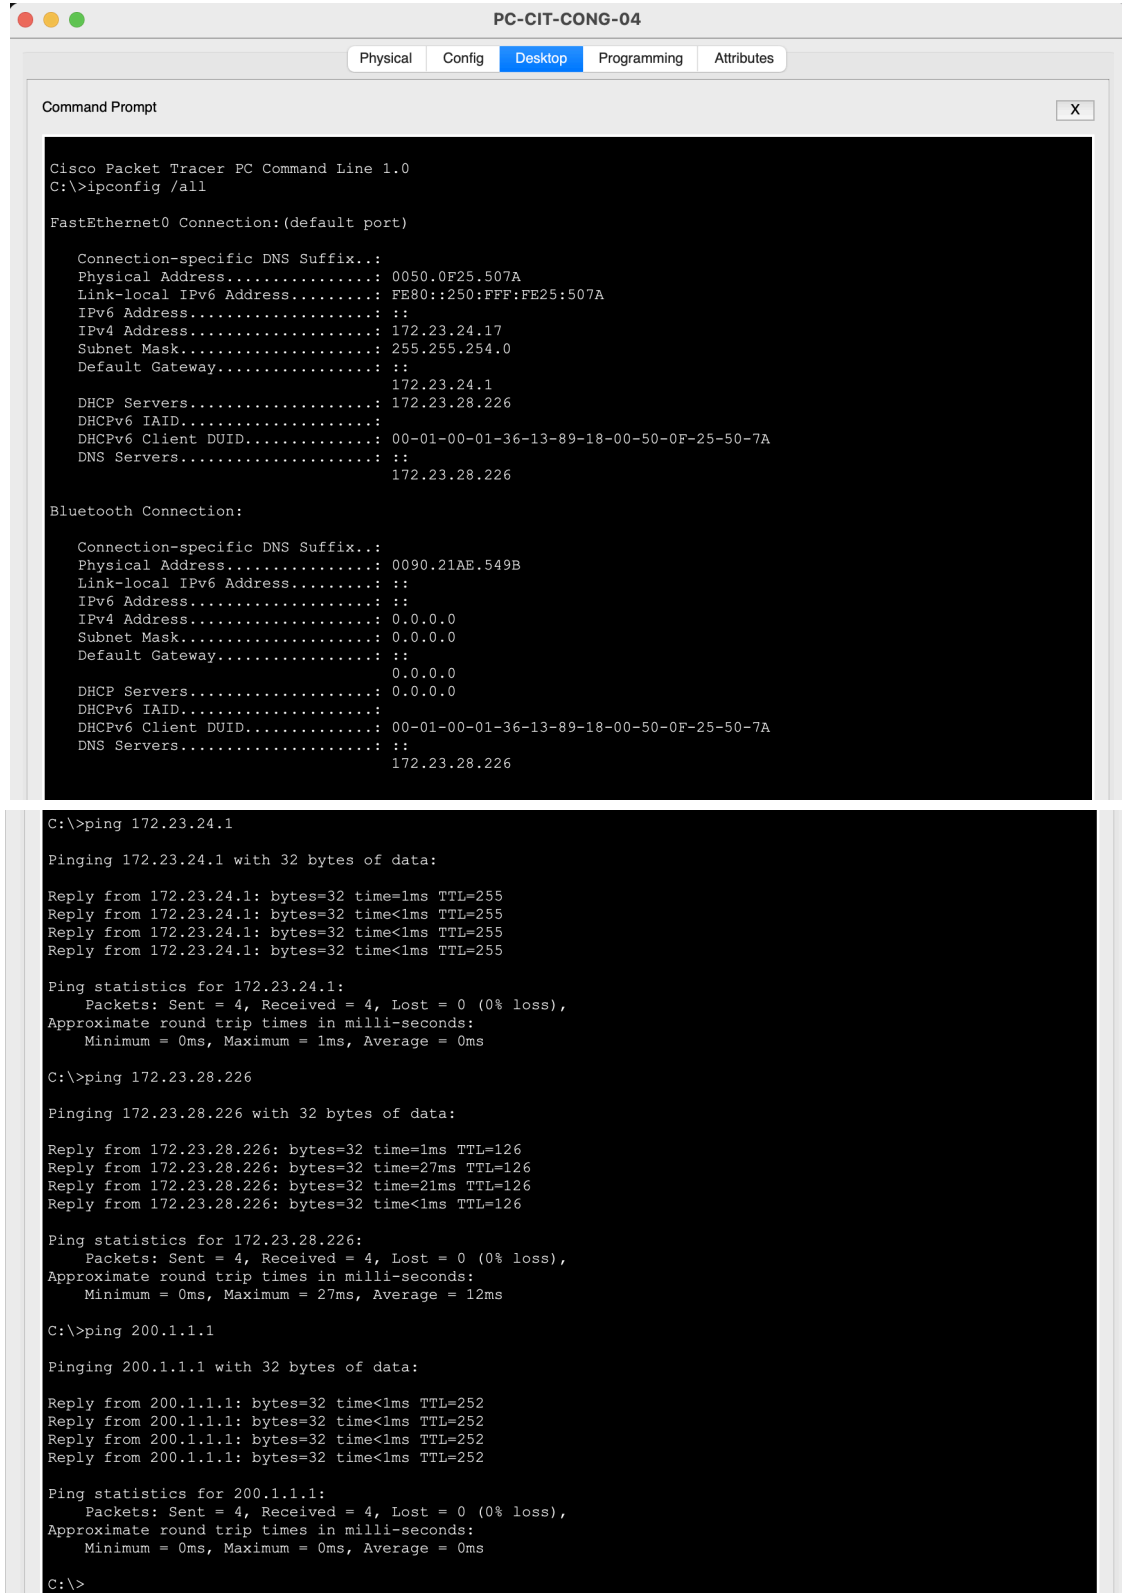

The screenshot shows a window titled "PC-CIT-CONG-04" with tabs for Physical, Config, Desktop (selected), Programming, and Attributes. The Desktop tab displays a Command Prompt window with the following output:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection:(default port)

    Connection-specific DNS Suffix.:
    Physical Address.....: 0050.0F25.507A
    Link-local IPv6 Address.....: FE80::250:FFF:FE25:507A
    IPv6 Address.....: ::
    IPv4 Address.....: 172.23.24.17
    Subnet Mask.....: 255.255.254.0
    Default Gateway.....: ::
                        172.23.24.1
    DHCP Servers.....: 172.23.28.226
    DHCPv6 IAID.....:
    DHCPv6 Client DUID.....: 00-01-00-01-36-13-89-18-00-50-0F-25-50-7A
    DNS Servers.....: ::
                        172.23.28.226

Bluetooth Connection:

    Connection-specific DNS Suffix.:
    Physical Address.....: 0090.21AE.549B
    Link-local IPv6 Address.....: ::
    IPv6 Address.....: ::
    IPv4 Address.....: 0.0.0.0
    Subnet Mask.....: 0.0.0.0
    Default Gateway.....: ::
                        0.0.0.0
    DHCP Servers.....: 0.0.0.0
    DHCPv6 IAID.....:
    DHCPv6 Client DUID.....: 00-01-00-01-36-13-89-18-00-50-0F-25-50-7A
    DNS Servers.....: ::
                        172.23.28.226

C:\>ping 172.23.24.1

Pinging 172.23.24.1 with 32 bytes of data:

Reply from 172.23.24.1: bytes=32 time=1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time=1ms TTL=126
Reply from 172.23.28.226: bytes=32 time=27ms TTL=126
Reply from 172.23.28.226: bytes=32 time=21ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 27ms, Average = 12ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:


Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```


PC-CIT-CONG-05

Comandos: ipconfig /all; ping 172.23.24.1; ping 172.23.28.226; ping 200.1.1.1

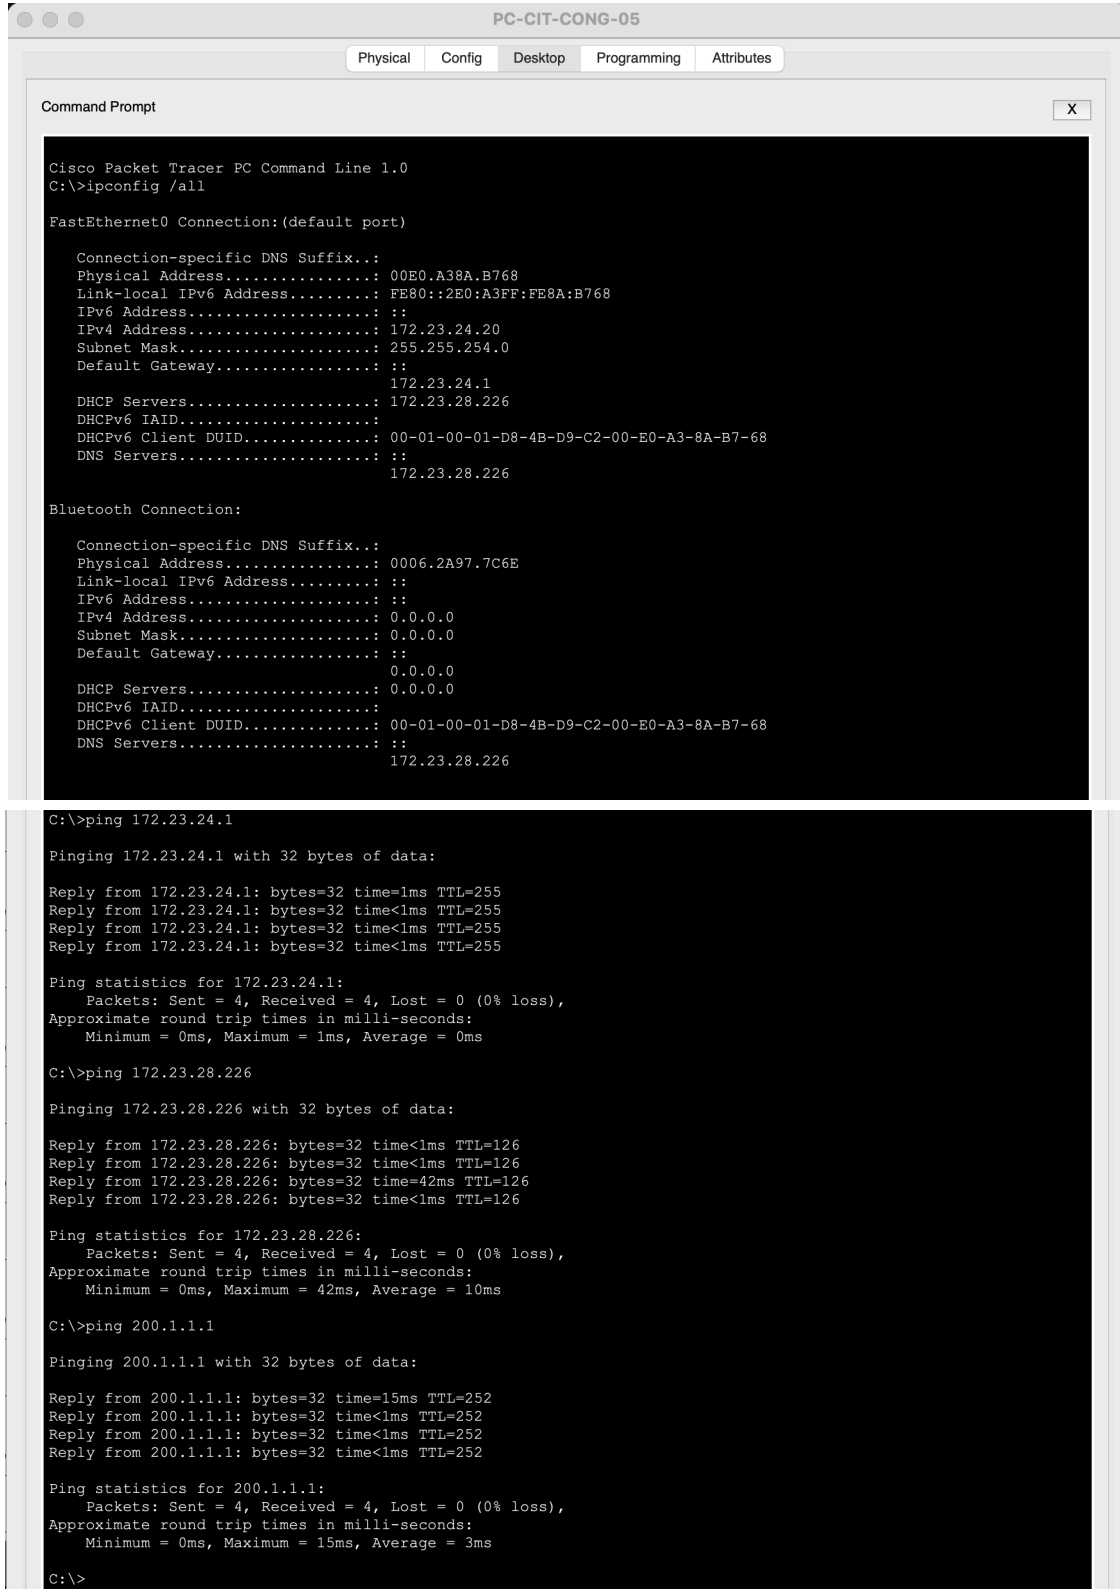

```
PC-CIT-CONG-05
Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection:(default port)

Connection-specific DNS Suffix.:
Physical Address.....: 00E0.A38A.B768
Link-local IPv6 Address.....: FE80::2E0:A3FF:FE8A:B768
IPv6 Address.....: ::
IPv4 Address.....: 172.23.24.20
Subnet Mask.....: 255.255.254.0
Default Gateway.....: ::
172.23.24.1
DHCP Servers.....: 172.23.28.226
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-D8-4B-D9-C2-00-E0-A3-8A-B7-68
DNS Servers.....: ::
172.23.28.226

Bluetooth Connection:

Connection-specific DNS Suffix.:
Physical Address.....: 0006.2A97.7C6E
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
DHCP Servers.....: 0.0.0.0
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-D8-4B-D9-C2-00-E0-A3-8A-B7-68
DNS Servers.....: ::
172.23.28.226

C:\>ping 172.23.24.1

Pinging 172.23.24.1 with 32 bytes of data:

Reply from 172.23.24.1: bytes=32 time=1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time=42ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 42ms, Average = 10ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:


Reply from 200.1.1.1: bytes=32 time=15ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 15ms, Average = 3ms

C:\>
```

PC-ALUMNOS-RESERVA-01

Comandos: ipconfig /all; ping 172.23.24.1; ping 172.23.28.226; ping 200.1.1.1

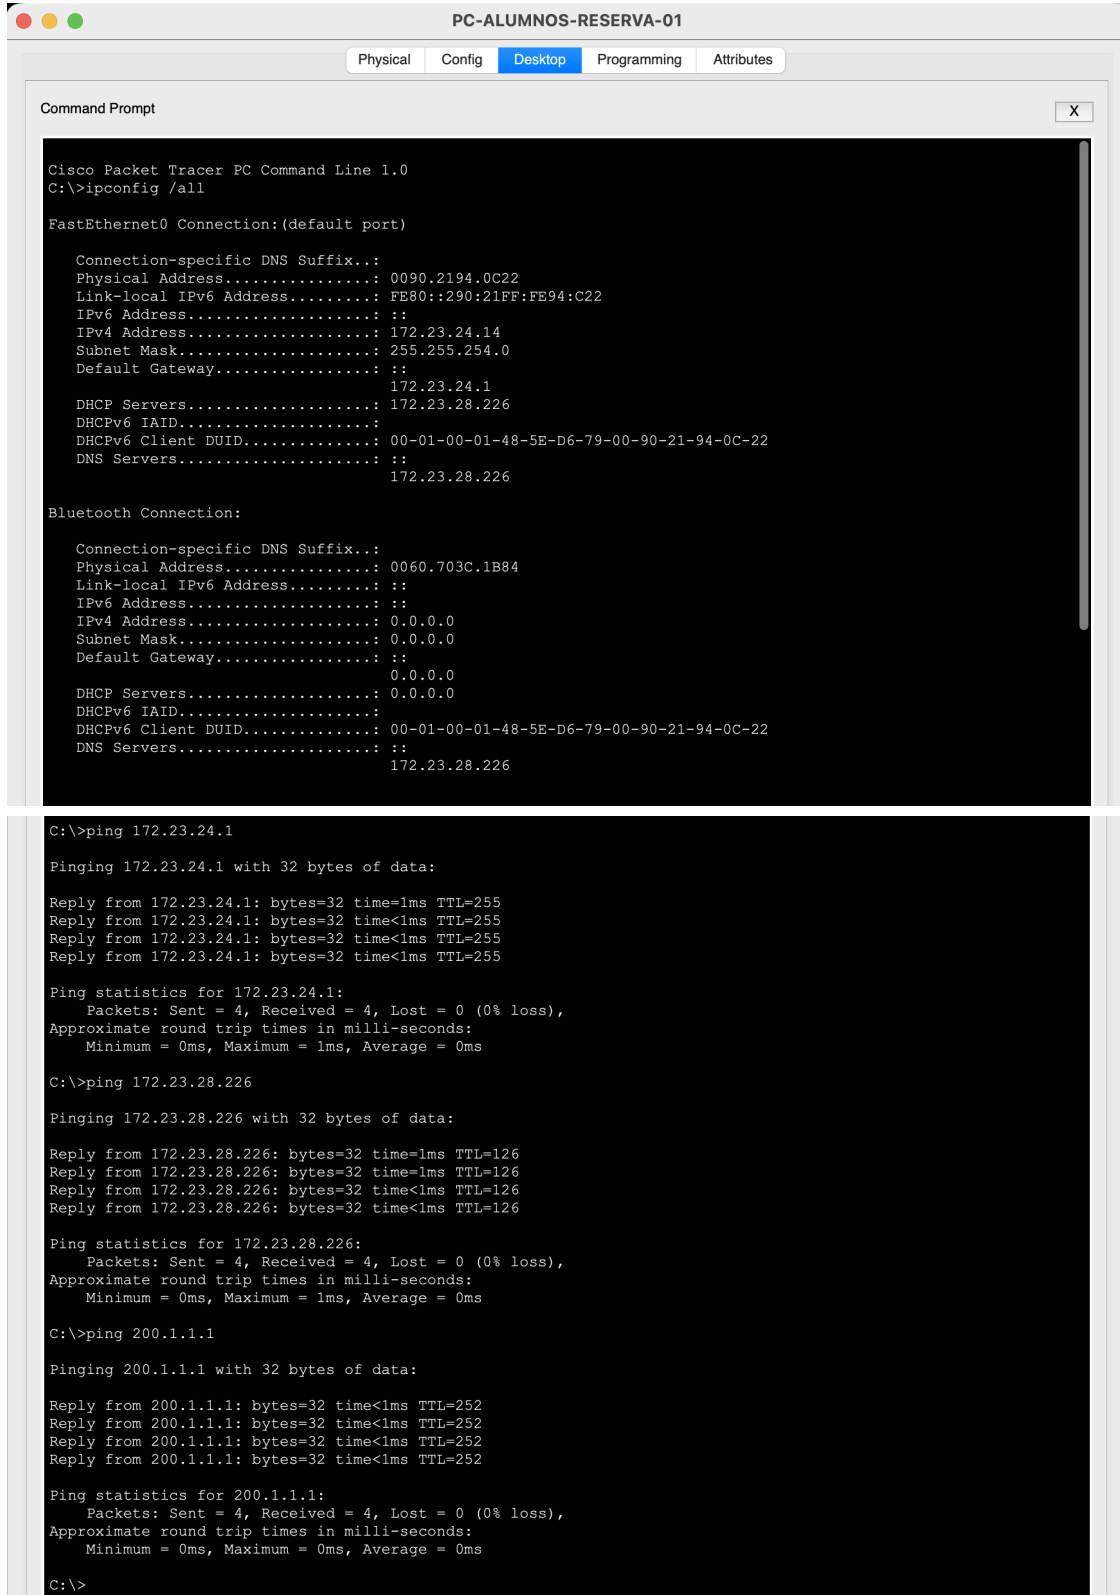

```
PC-ALUMNOS-RESERVA-01
Physical Config Desktop Programming Attributes
Command Prompt X

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection:(default port)

Connection-specific DNS Suffix.:
Physical Address.....: 0090.2194.0C22
Link-local IPv6 Address.....: FE80::290:21FF:FE94:C22
IPv6 Address.....: ::
IPv4 Address.....: 172.23.24.14
Subnet Mask.....: 255.255.254.0
Default Gateway.....: ::
172.23.24.1
DHCP Servers.....: 172.23.28.226
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-48-5E-D6-79-00-90-21-94-0C-22
DNS Servers.....: ::
172.23.28.226

Bluetooth Connection:

Connection-specific DNS Suffix.:
Physical Address.....: 0060.703C.1B84
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
DHCP Servers.....: 0.0.0.0
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-48-5E-D6-79-00-90-21-94-0C-22
DNS Servers.....: ::
172.23.28.226

C:\>ping 172.23.24.1

Pinging 172.23.24.1 with 32 bytes of data:

Reply from 172.23.24.1: bytes=32 time=1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time=1ms TTL=126
Reply from 172.23.28.226: bytes=32 time=1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:


Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

PC-ALUMNOS-RESERVA-02

Comandos: ipconfig /all; ping 172.23.24.1; ping 172.23.28.226; ping 200.1.1.1

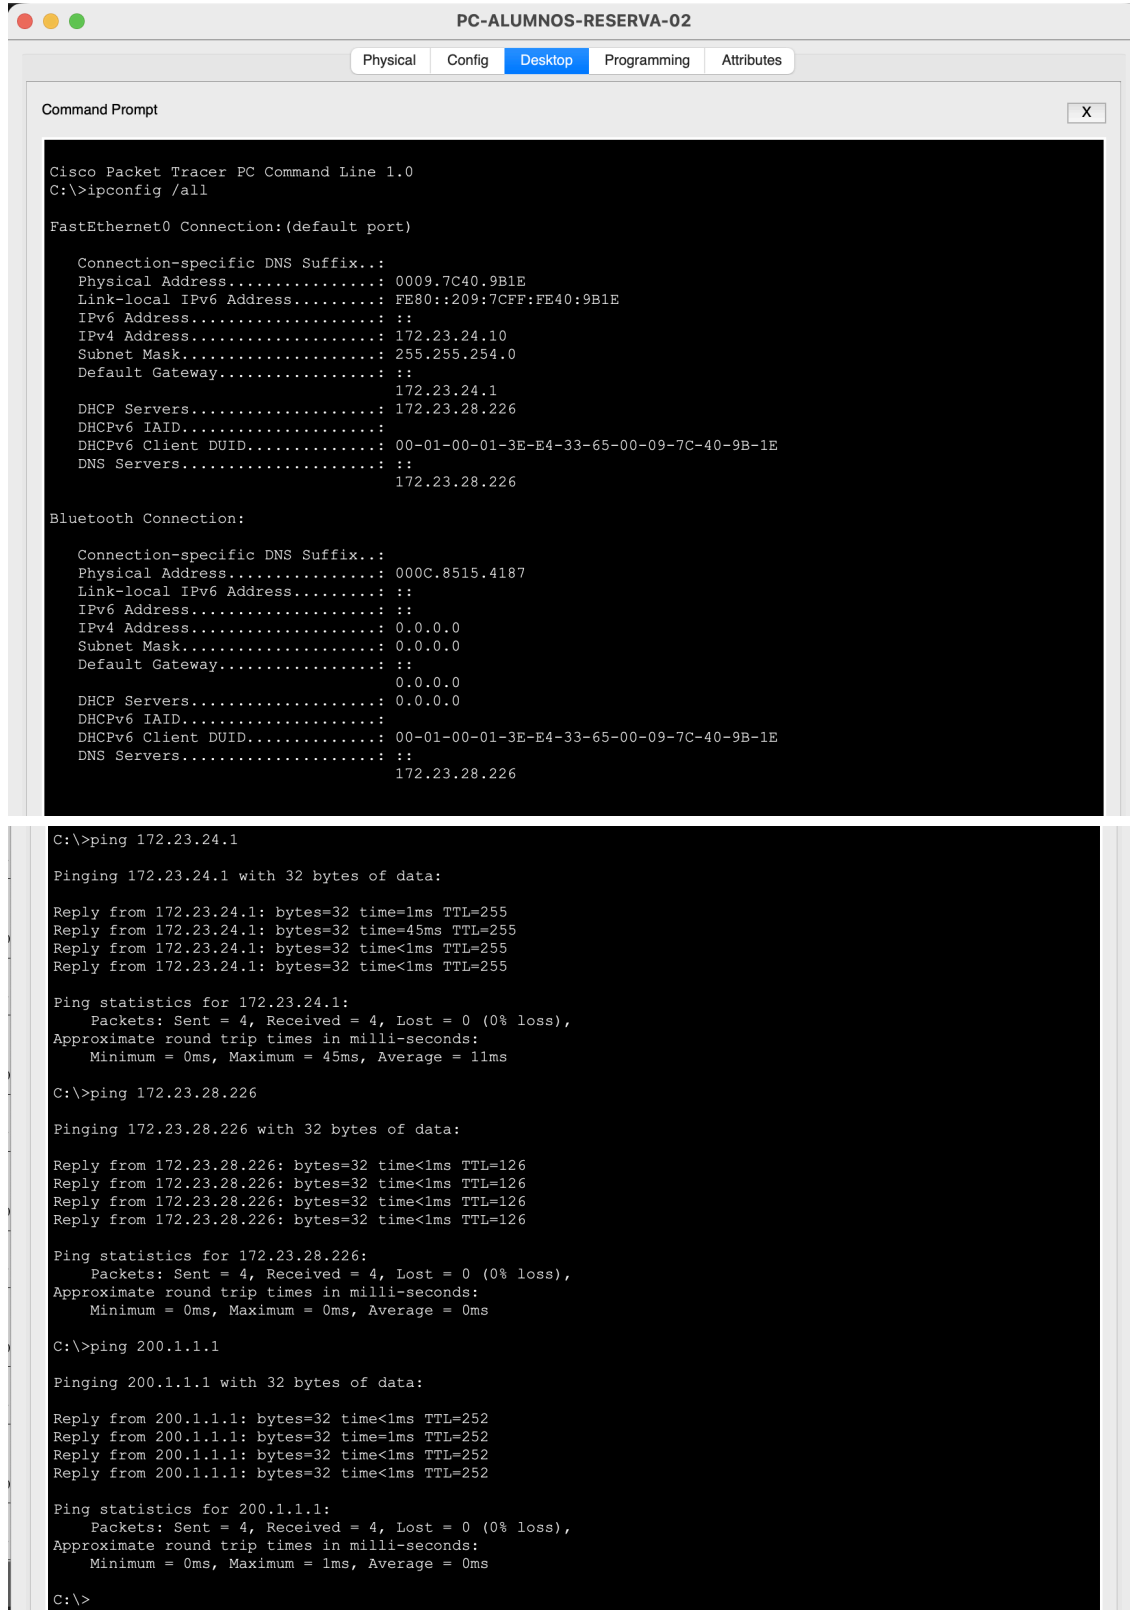

```
PC-ALUMNOS-RESERVA-02
Physical Config Desktop Programming Attributes

Command Prompt X

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection:(default port)

Connection-specific DNS Suffix...:
Physical Address.....: 0009.7C40.9B1E
Link-local IPv6 Address.....: FE80::209:7CFF:FE40:9B1E
IPv6 Address.....: ::
IPv4 Address.....: 172.23.24.10
Subnet Mask.....: 255.255.254.0
Default Gateway.....: ::
172.23.24.1
DHCP Servers.....: 172.23.28.226
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-3E-E4-33-65-00-09-7C-40-9B-1E
DNS Servers.....: ::
172.23.28.226

Bluetooth Connection:

Connection-specific DNS Suffix...:
Physical Address.....: 000C.8515.4187
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
DHCP Servers.....: 0.0.0.0
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-3E-E4-33-65-00-09-7C-40-9B-1E
DNS Servers.....: ::
172.23.28.226

C:\>ping 172.23.24.1

Pinging 172.23.24.1 with 32 bytes of data:

Reply from 172.23.24.1: bytes=32 time=1ms TTL=255
Reply from 172.23.24.1: bytes=32 time=45ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 45ms, Average = 11ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:


Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time=1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

PC-ENH-1223

Comandos: ipconfig /all; ping 172.23.24.1; ping 172.23.28.226; ping 200.1.1.1

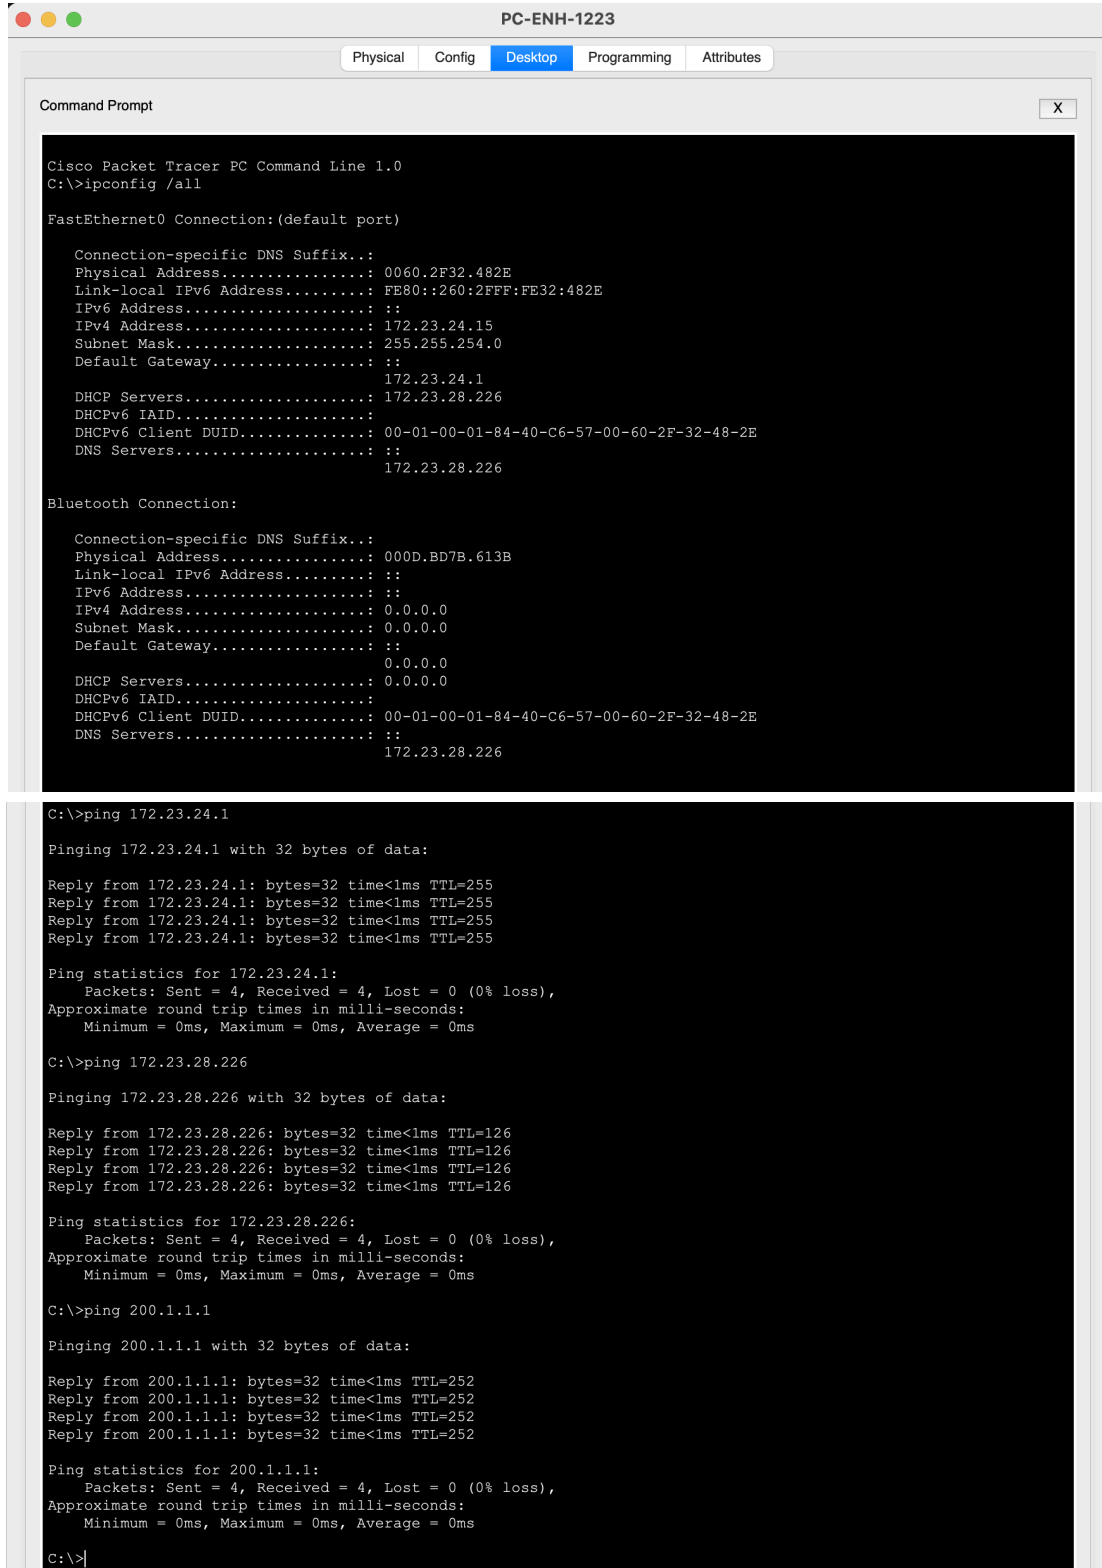

```
PC-ENH-1223
Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection: (default port)

Connection-specific DNS Suffix...:
Physical Address...: 0060.2F32.482E
Link-local IPv6 Address...: FE80::260:2FFF:FE32:482E
IPv6 Address...: ::
IPv4 Address...: 172.23.24.15
Subnet Mask...: 255.255.254.0
Default Gateway...: ::
172.23.24.1
DHCP Servers...: 172.23.28.226
DHCPv6 IAID...:
DHCPv6 Client DUID...: 00-01-00-01-84-40-C6-57-00-60-2F-32-48-2E
DNS Servers...: ::
172.23.28.226

Bluetooth Connection:

Connection-specific DNS Suffix...:
Physical Address...: 000D.BD7B.613B
Link-local IPv6 Address...: ::
IPv6 Address...: ::
IPv4 Address...: 0.0.0.0
Subnet Mask...: 0.0.0.0
Default Gateway...: ::
0.0.0.0
DHCP Servers...: 0.0.0.0
DHCPv6 IAID...:
DHCPv6 Client DUID...: 00-01-00-01-84-40-C6-57-00-60-2F-32-48-2E
DNS Servers...: ::
172.23.28.226

C:\>ping 172.23.24.1

Pinging 172.23.24.1 with 32 bytes of data:

Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:


Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```

PC-ENH-1224

Comandos: ipconfig /all; ping 172.23.24.1; ping 172.23.28.226; ping 200.1.1.1

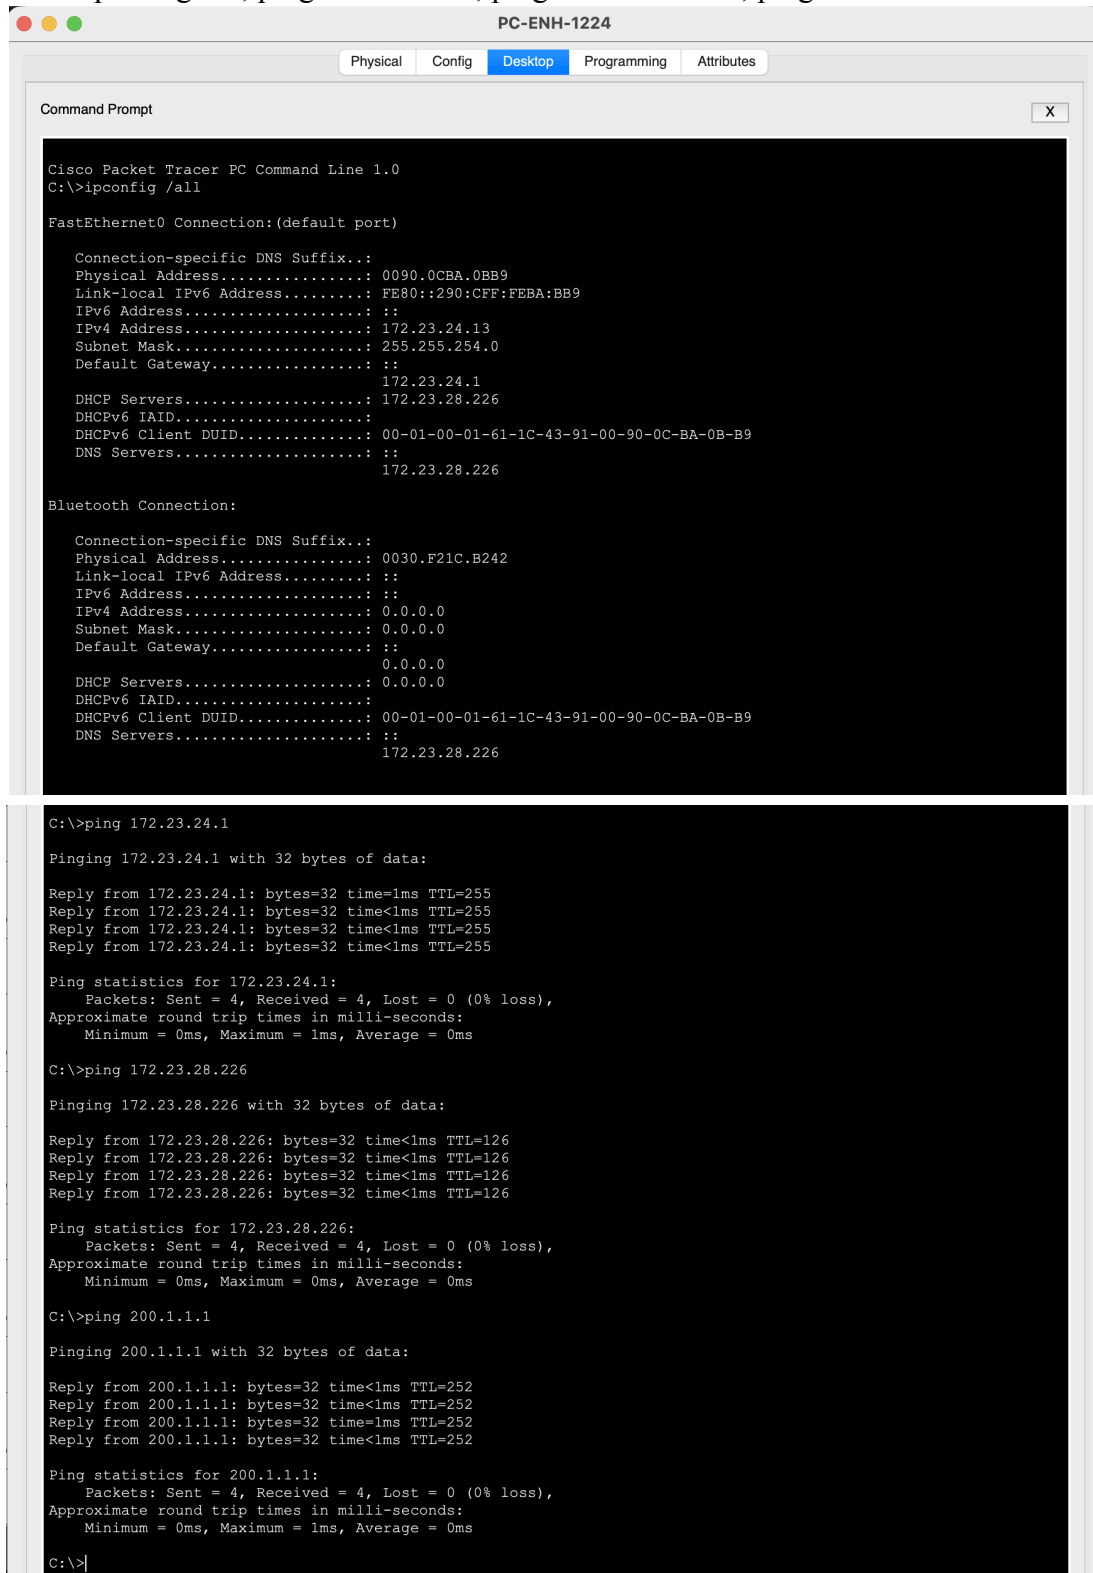

```
PC-ENH-1224
Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection: (default port)

Connection-specific DNS Suffix...:
Physical Address.....: 0090.0CBA.0BB9
Link-local IPv6 Address.....: FE80::290:CFF:FEBA:BB9
IPv6 Address.....: ::
IPv4 Address.....: 172.23.24.13
Subnet Mask.....: 255.255.254.0
Default Gateway.....: ::
172.23.24.1
DHCP Servers.....: 172.23.28.226
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-61-1C-43-91-00-90-0C-BA-0B-B9
DNS Servers.....: ::
172.23.28.226

Bluetooth Connection:

Connection-specific DNS Suffix...:
Physical Address.....: 0030.F21C.B242
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
DHCP Servers.....: 0.0.0.0
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-61-1C-43-91-00-90-0C-BA-0B-B9
DNS Servers.....: ::
172.23.28.226

C:\>ping 172.23.24.1

Pinging 172.23.24.1 with 32 bytes of data:

Reply from 172.23.24.1: bytes=32 time=1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:


Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time=1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```

PC-ENH-FIN

Comandos: ipconfig /all; ping 172.23.24.1; ping 172.23.28.226; ping 200.1.1.1

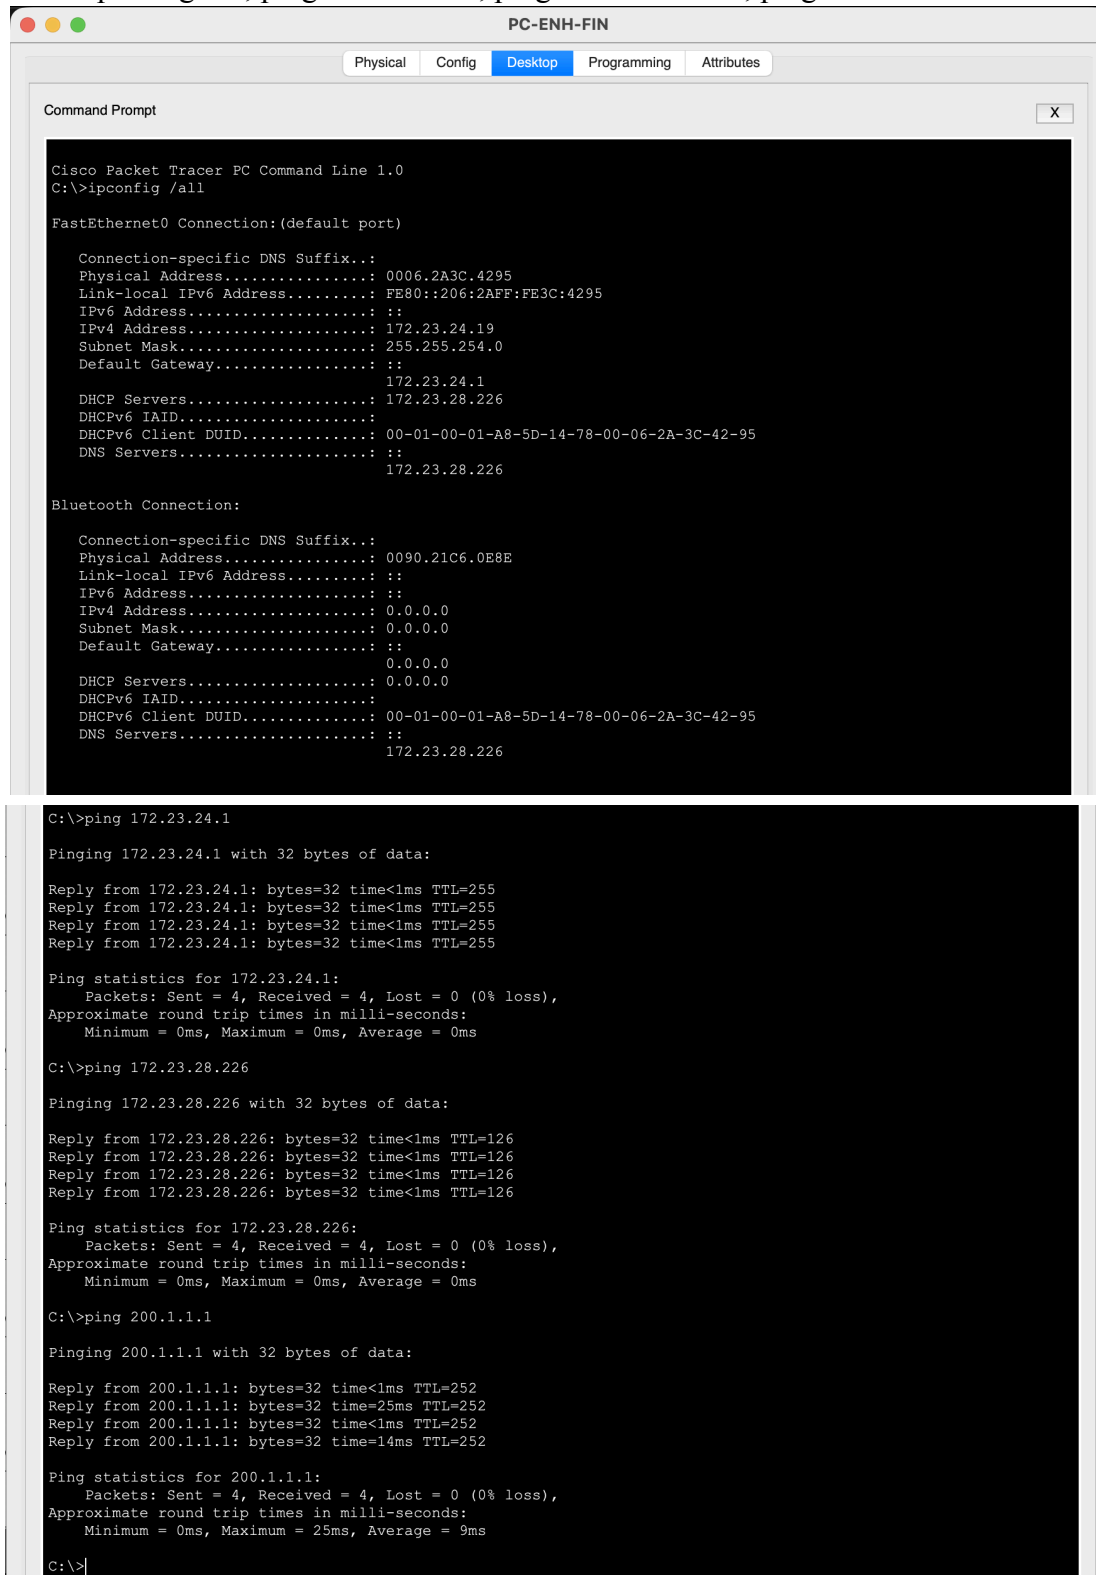

```
PC-ENH-FIN
Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection: (default port)

Connection-specific DNS Suffix...:
Physical Address.....: 0006.2A3C.4295
Link-local IPv6 Address.....: FE80::206:2AFF:FE3C:4295
IPv6 Address.....: ::
IPv4 Address.....: 172.23.24.19
Subnet Mask.....: 255.255.254.0
Default Gateway.....: ::
172.23.24.1
DHCP Servers.....: 172.23.28.226
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-A8-5D-14-78-00-06-2A-3C-42-95
DNS Servers.....: ::
172.23.28.226

Bluetooth Connection:

Connection-specific DNS Suffix...:
Physical Address.....: 0090.21C6.0E8E
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
DHCP Servers.....: 0.0.0.0
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-A8-5D-14-78-00-06-2A-3C-42-95
DNS Servers.....: ::
172.23.28.226

C:\>ping 172.23.24.1

Pinging 172.23.24.1 with 32 bytes of data:

Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:


Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time=25ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time=14ms TTL=252

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 25ms, Average = 9ms

C:\>|
```

PC-EIC-12102

Comandos: ipconfig /all; ping 172.23.24.1; ping 172.23.28.226; ping 200.1.1.1

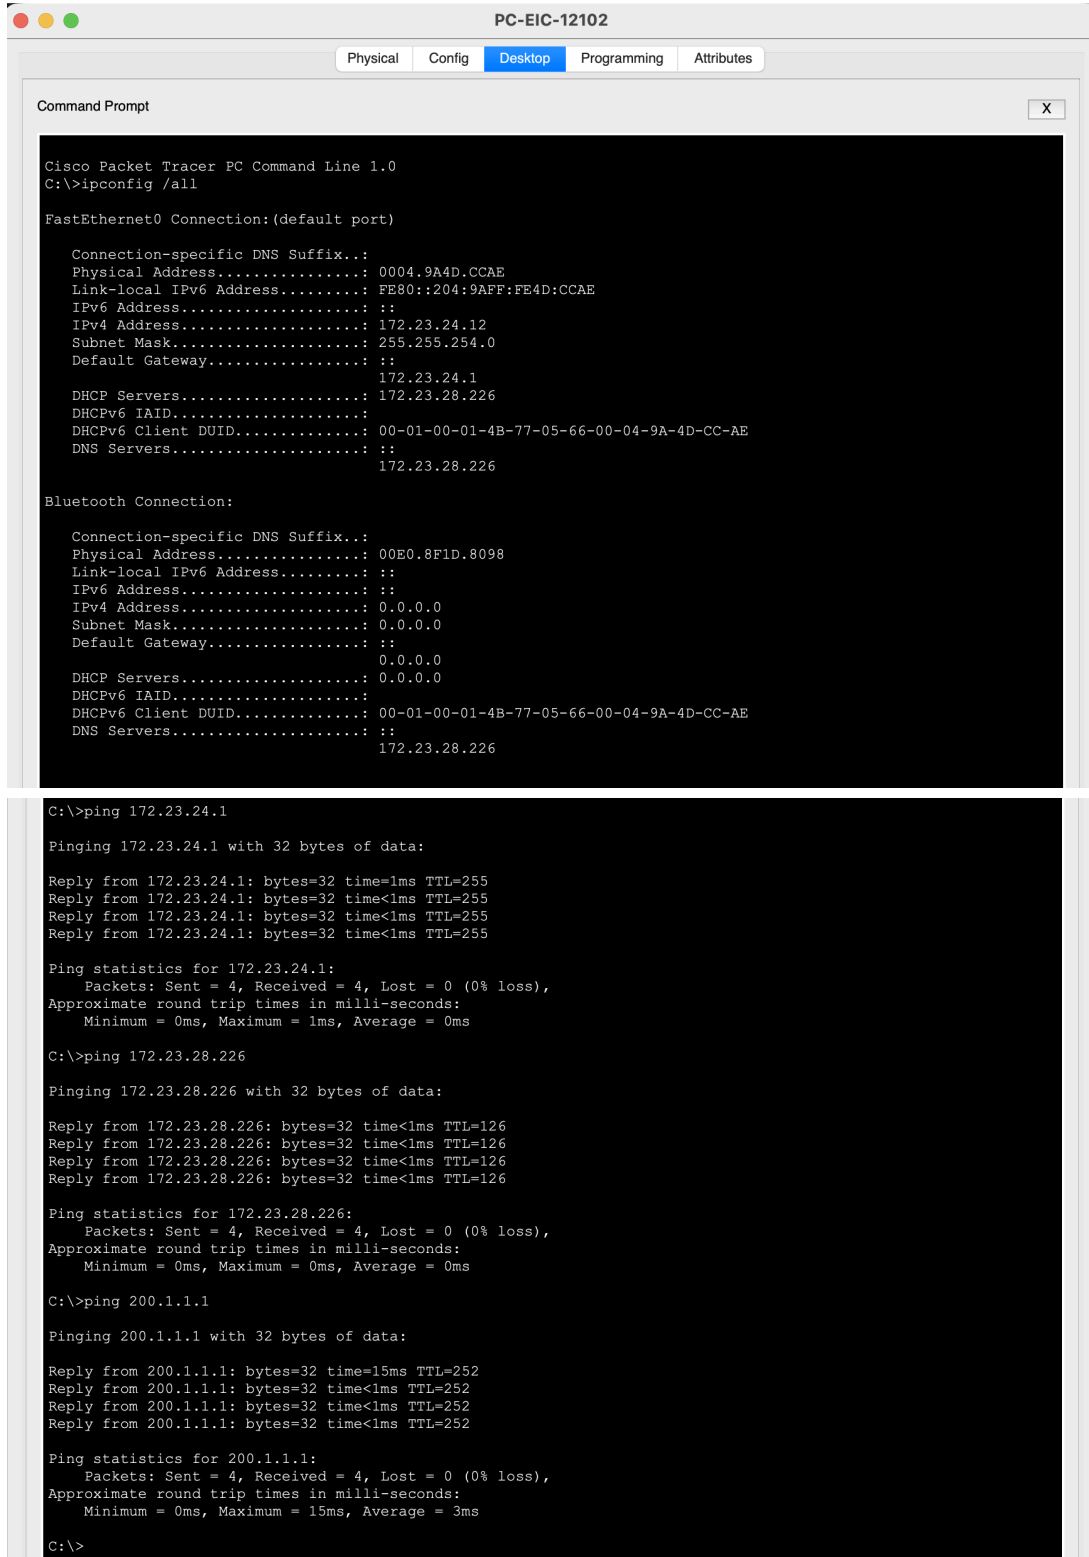

```
PC-EIC-12102
Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection: (default port)

Connection-specific DNS Suffix...:
Physical Address.....: 0004.9A4D.CCAE
Link-local IPv6 Address.....: FE80::204:9AFF:FE4D:CCA
IPv6 Address.....: ::
IPv4 Address.....: 172.23.24.12
Subnet Mask.....: 255.255.254.0
Default Gateway.....: ::
172.23.24.1
DHCP Servers.....: 172.23.28.226
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-4B-77-05-66-00-04-9A-4D-CC-AE
DNS Servers.....: ::
172.23.28.226

Bluetooth Connection:

Connection-specific DNS Suffix...:
Physical Address.....: 00E0.8F1D.8098
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
DHCP Servers.....: 0.0.0.0
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-4B-77-05-66-00-04-9A-4D-CC-AE
DNS Servers.....: ::
172.23.28.226

C:\>ping 172.23.24.1

Pinging 172.23.24.1 with 32 bytes of data:

Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255
Reply from 172.23.24.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126
Reply from 172.23.28.226: bytes=32 time<1ms TTL=126

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:


Reply from 200.1.1.1: bytes=32 time=15ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252
Reply from 200.1.1.1: bytes=32 time<1ms TTL=252

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 15ms, Average = 3ms

C:\>
```

PC-EIC-JUEZ

Comandos: ipconfig /all; ping 172.23.28.1; ping 172.23.28.226; ping 200.1.1.1

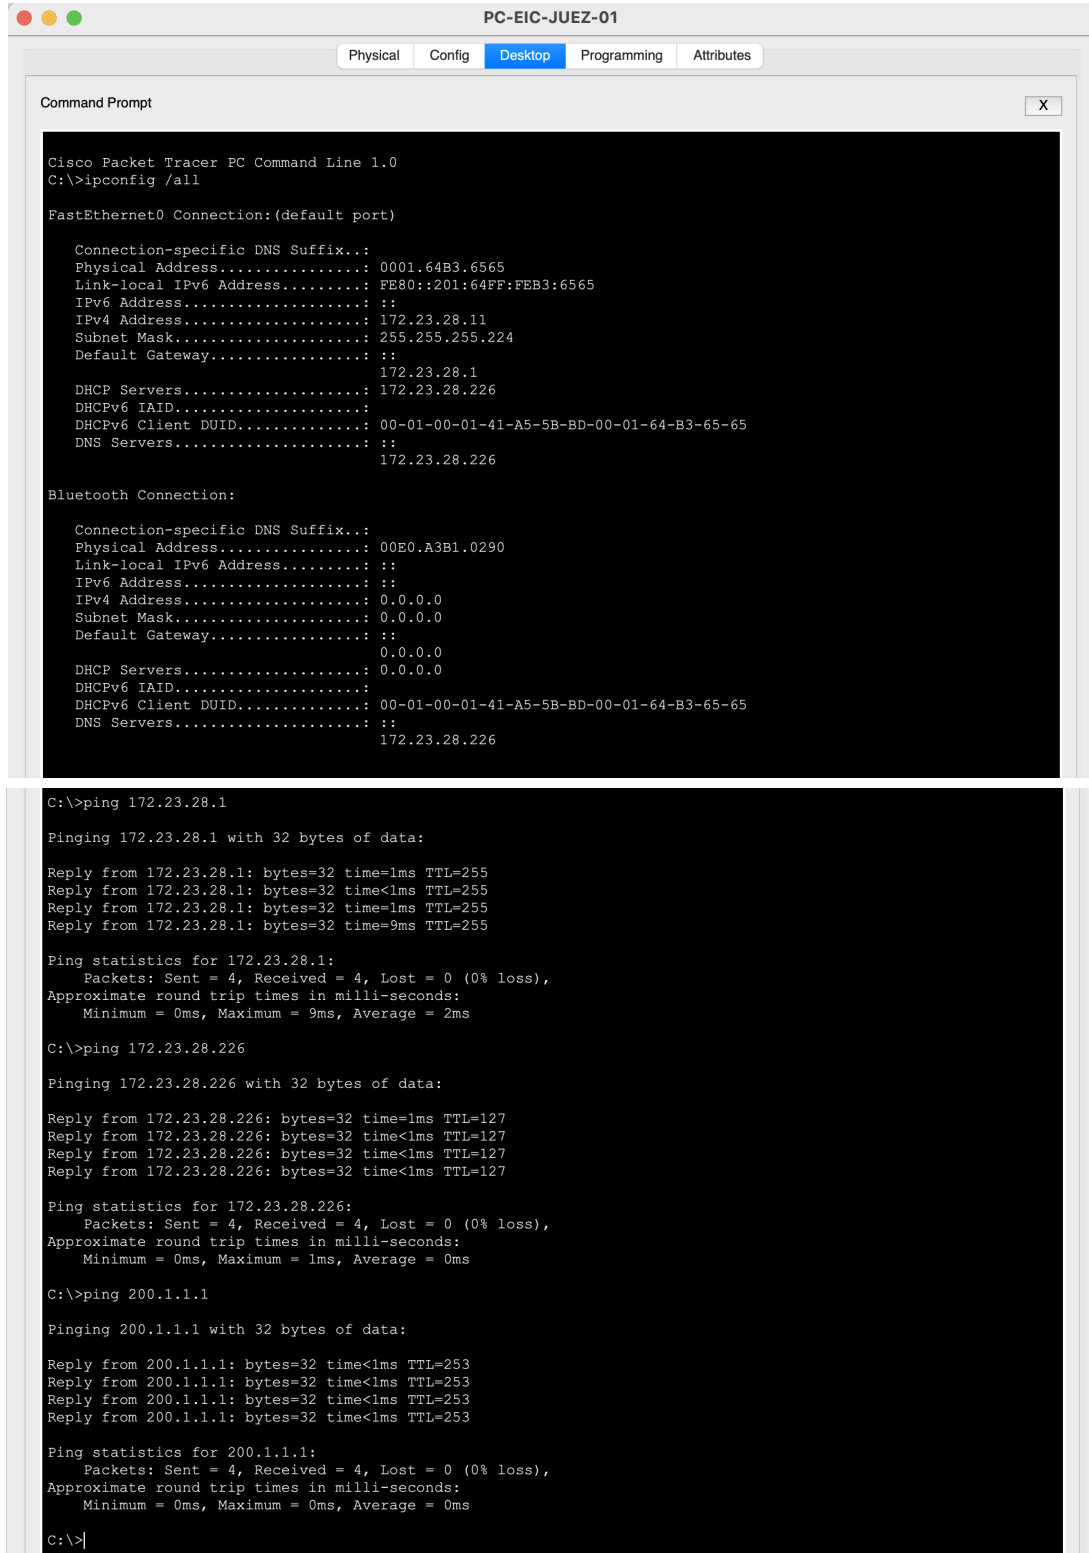

```
PC-EIC-JUEZ-01
Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection: (default port)

Connection-specific DNS Suffix...:
Physical Address.....: 0001.64B3.6565
Link-local IPv6 Address.....: FE80::201:64FF:FEB3:6565
IPv6 Address.....: ::
IPv4 Address.....: 172.23.28.11
Subnet Mask.....: 255.255.255.224
Default Gateway.....: ::
                        172.23.28.1
DHCP Servers.....: 172.23.28.226
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-41-A5-5B-BD-00-01-64-B3-65-65
DNS Servers.....: ::
                        172.23.28.226

Bluetooth Connection:

Connection-specific DNS Suffix...:
Physical Address.....: 00E0.A3B1.0290
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
                        0.0.0.0
DHCP Servers.....: 0.0.0.0
DHCPv6 IAID.....:
DHCPv6 Client DUID.....: 00-01-00-01-41-A5-5B-BD-00-01-64-B3-65-65
DNS Servers.....: ::
                        172.23.28.226

C:\>ping 172.23.28.1

Pinging 172.23.28.1 with 32 bytes of data:

Reply from 172.23.28.1: bytes=32 time=1ms TTL=255
Reply from 172.23.28.1: bytes=32 time<1ms TTL=255
Reply from 172.23.28.1: bytes=32 time=1ms TTL=255
Reply from 172.23.28.1: bytes=32 time=9ms TTL=255

Ping statistics for 172.23.28.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 9ms, Average = 2ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time=1ms TTL=127
Reply from 172.23.28.226: bytes=32 time<1ms TTL=127
Reply from 172.23.28.226: bytes=32 time<1ms TTL=127
Reply from 172.23.28.226: bytes=32 time<1ms TTL=127

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:


Reply from 200.1.1.1: bytes=32 time<1ms TTL=253
Reply from 200.1.1.1: bytes=32 time<1ms TTL=253
Reply from 200.1.1.1: bytes=32 time<1ms TTL=253
Reply from 200.1.1.1: bytes=32 time<1ms TTL=253

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```


PC-CIT-ENTRENADOR

Comandos: ipconfig /all; ping 172.23.28.65; ping 172.23.28.226; ping 200.1.1.1; ping <IP-PC-CONCURSANTE> (debe fallar)

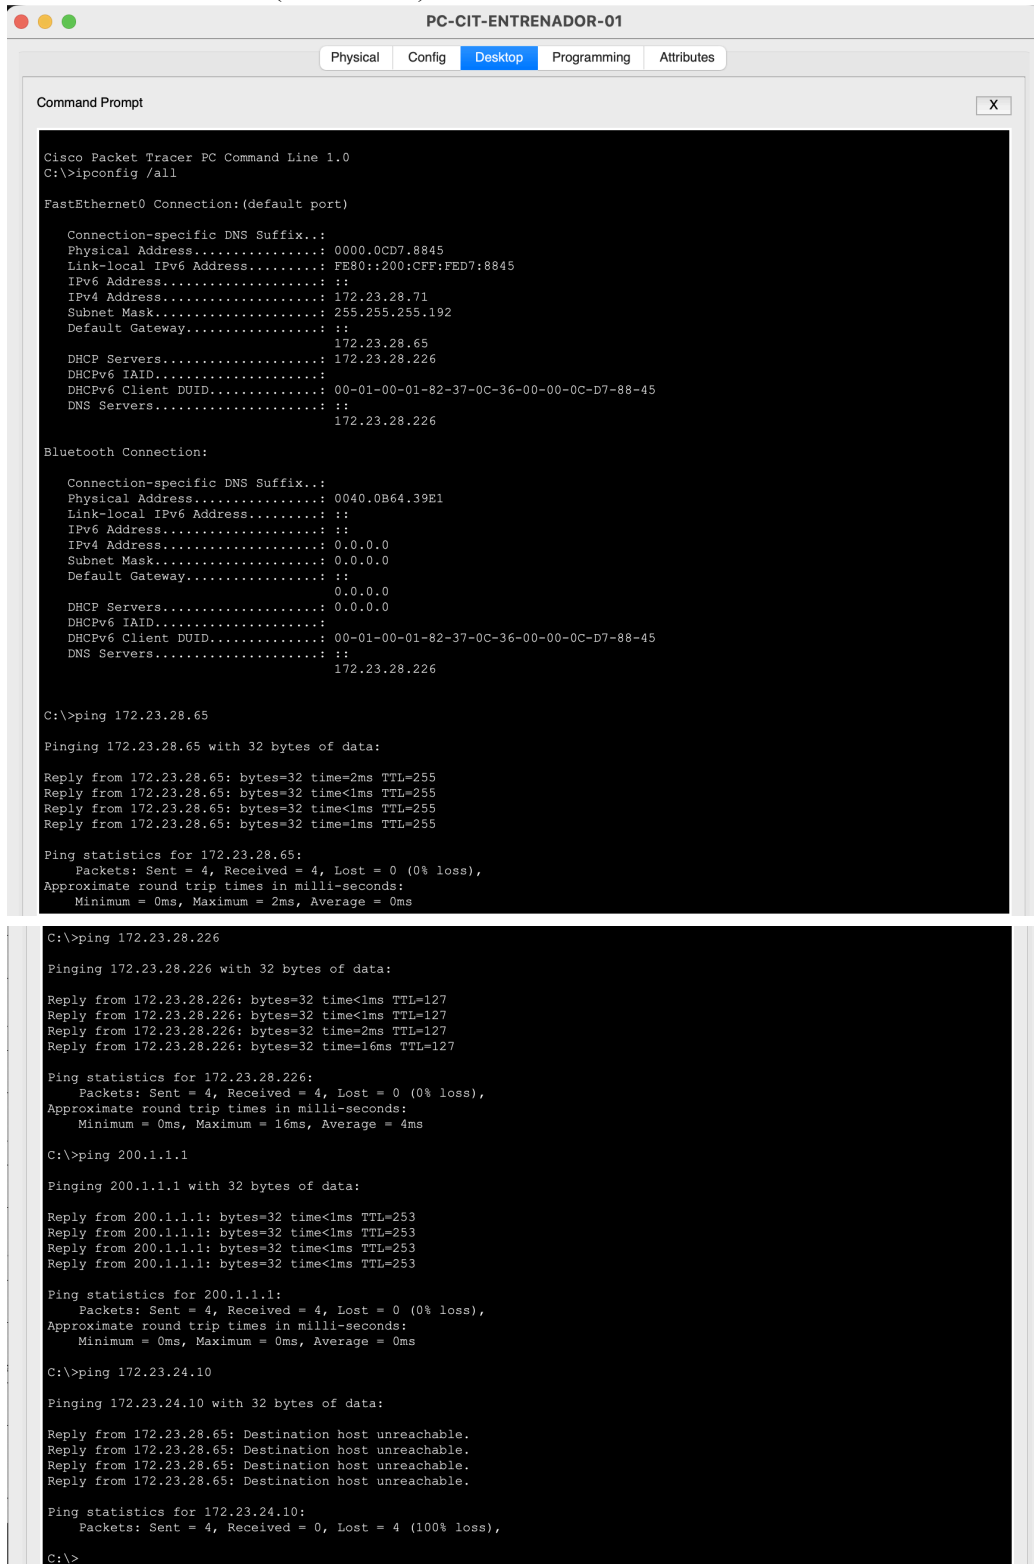

```
PC-CIT-ENTRENADOR-01
Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection:(default port)

    Connection-specific DNS Suffix...:
    Physical Address.....: 0000.0CD7.8845
    Link-local IPv6 Address.....: FE80::200:CFF:FED7:8845
    IPv6 Address.....: ::
    IPv4 Address.....: 172.23.28.71
    Subnet Mask.....: 255.255.255.192
    Default Gateway.....: ::
                        172.23.28.65
    DHCP Servers.....: 172.23.28.226
    DHCPv6 IAID.....:
    DHCPv6 Client DUID.....: 00-01-00-01-82-37-0C-36-00-00-0C-D7-88-45
    DNS Servers.....: ::
                        172.23.28.226

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Physical Address.....: 0040.0B64.39E1
    Link-local IPv6 Address.....: ::
    IPv6 Address.....: ::
    IPv4 Address.....: 0.0.0.0
    Subnet Mask.....: 0.0.0.0
    Default Gateway.....: ::
                        0.0.0.0
    DHCP Servers.....: 0.0.0.0
    DHCPv6 IAID.....:
    DHCPv6 Client DUID.....: 00-01-00-01-82-37-0C-36-00-00-0C-D7-88-45
    DNS Servers.....: ::
                        172.23.28.226

C:\>ping 172.23.28.65

Pinging 172.23.28.65 with 32 bytes of data:

Reply from 172.23.28.65: bytes=32 time=2ms TTL=255
Reply from 172.23.28.65: bytes=32 time<1ms TTL=255
Reply from 172.23.28.65: bytes=32 time<1ms TTL=255
Reply from 172.23.28.65: bytes=32 time=1ms TTL=255

Ping statistics for 172.23.28.65:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 2ms, Average = 0ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time<1ms TTL=127
Reply from 172.23.28.226: bytes=32 time<1ms TTL=127
Reply from 172.23.28.226: bytes=32 time=2ms TTL=127
Reply from 172.23.28.226: bytes=32 time=16ms TTL=127

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 16ms, Average = 4ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:

Reply from 200.1.1.1: bytes=32 time<1ms TTL=253
Reply from 200.1.1.1: bytes=32 time<1ms TTL=253
Reply from 200.1.1.1: bytes=32 time<1ms TTL=253
Reply from 200.1.1.1: bytes=32 time<1ms TTL=253

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 172.23.24.10

Pinging 172.23.24.10 with 32 bytes of data:


Reply from 172.23.28.65: Destination host unreachable.
Reply from 172.23.28.65: Destination host unreachable.
Reply from 172.23.28.65: Destination host unreachable.
Reply from 172.23.28.65: Destination host unreachable.

Ping statistics for 172.23.24.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

PC-ENH-PRENSA

Comandos: ipconfig /all; ping 172.23.28.129; ping 172.23.28.226; ping 200.1.1.1; ping <IP-PC-CONCURSANTE> (debe fallar)

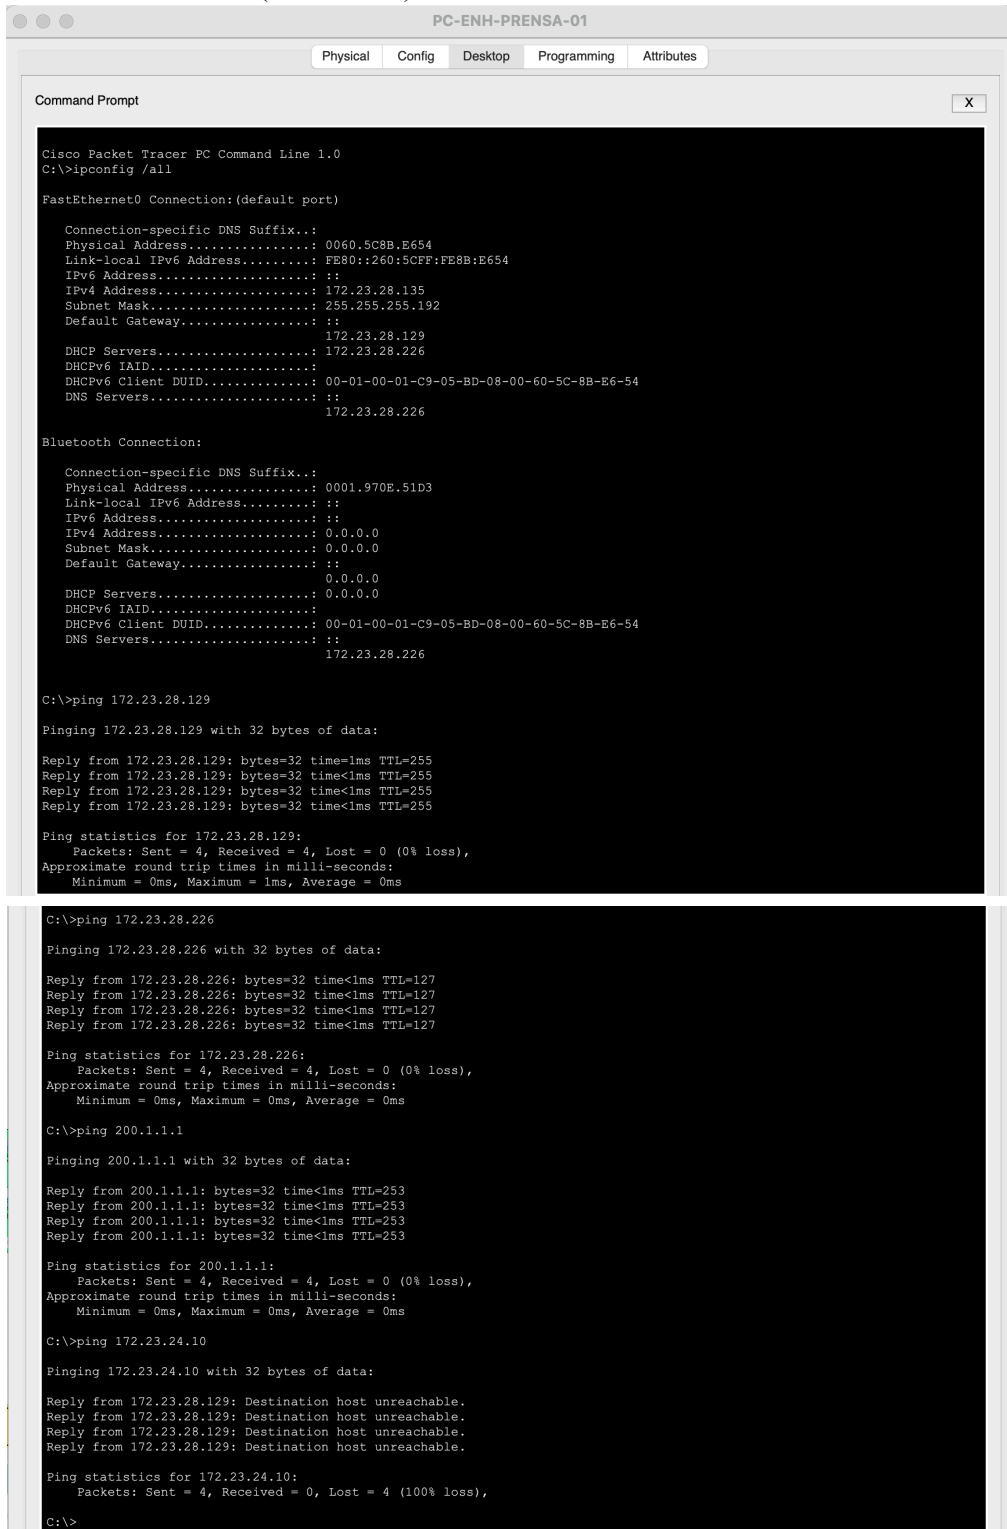

```
PC-ENH-PRENSA-01
Physical Config Desktop Programming Attributes

Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

FastEthernet0 Connection:(default port)

Connection-specific DNS Suffix...:
Physical Address.....: 0060.5C9B.E654
Link-local IPv6 Address.....: FE80::260:5CFF:FE8B:E654
IPv6 Address.....: ::
IPv4 Address.....: 172.23.28.135
Subnet Mask.....: 255.255.255.192
Default Gateway.....: ::
DHCP Servers.....: 172.23.28.129
DHCPv6 IAID.....: 172.23.28.226
DHCPv6 Client DUID.....: 00-01-00-01-C9-05-BD-08-00-60-5C-8B-E6-54
DNS Servers.....: ::
172.23.28.226

Bluetooth Connection:

Connection-specific DNS Suffix...:
Physical Address.....: 0001.970E.51D3
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
DHCP Servers.....: 0.0.0.0
DHCPv6 IAID.....: 0.0.0.0
DHCPv6 Client DUID.....: 00-01-00-01-C9-05-BD-08-00-60-5C-8B-E6-54
DNS Servers.....: ::
172.23.28.226

C:\>ping 172.23.28.129

Pinging 172.23.28.129 with 32 bytes of data:

Reply from 172.23.28.129: bytes=32 time<1ms TTL=255
Reply from 172.23.28.129: bytes=32 time<1ms TTL=255
Reply from 172.23.28.129: bytes=32 time<1ms TTL=255
Reply from 172.23.28.129: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.28.129:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time<1ms TTL=127
Reply from 172.23.28.226: bytes=32 time<1ms TTL=127
Reply from 172.23.28.226: bytes=32 time<1ms TTL=127
Reply from 172.23.28.226: bytes=32 time<1ms TTL=127

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:

Reply from 200.1.1.1: bytes=32 time<1ms TTL=253
Reply from 200.1.1.1: bytes=32 time<1ms TTL=253
Reply from 200.1.1.1: bytes=32 time<1ms TTL=253
Reply from 200.1.1.1: bytes=32 time<1ms TTL=253

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 172.23.24.10

Pinging 172.23.24.10 with 32 bytes of data:


Reply from 172.23.28.129: Destination host unreachable.
Reply from 172.23.28.129: Destination host unreachable.
Reply from 172.23.28.129: Destination host unreachable.
Reply from 172.23.28.129: Destination host unreachable.

Ping statistics for 172.23.24.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

Laptop-ENH-INVITADO

Comandos: ipconfig /all; ping 172.23.26.1; ping 172.23.28.226; ping 200.1.1.1; ping <IP-PC-CONCURSANTE> (debe fallar)

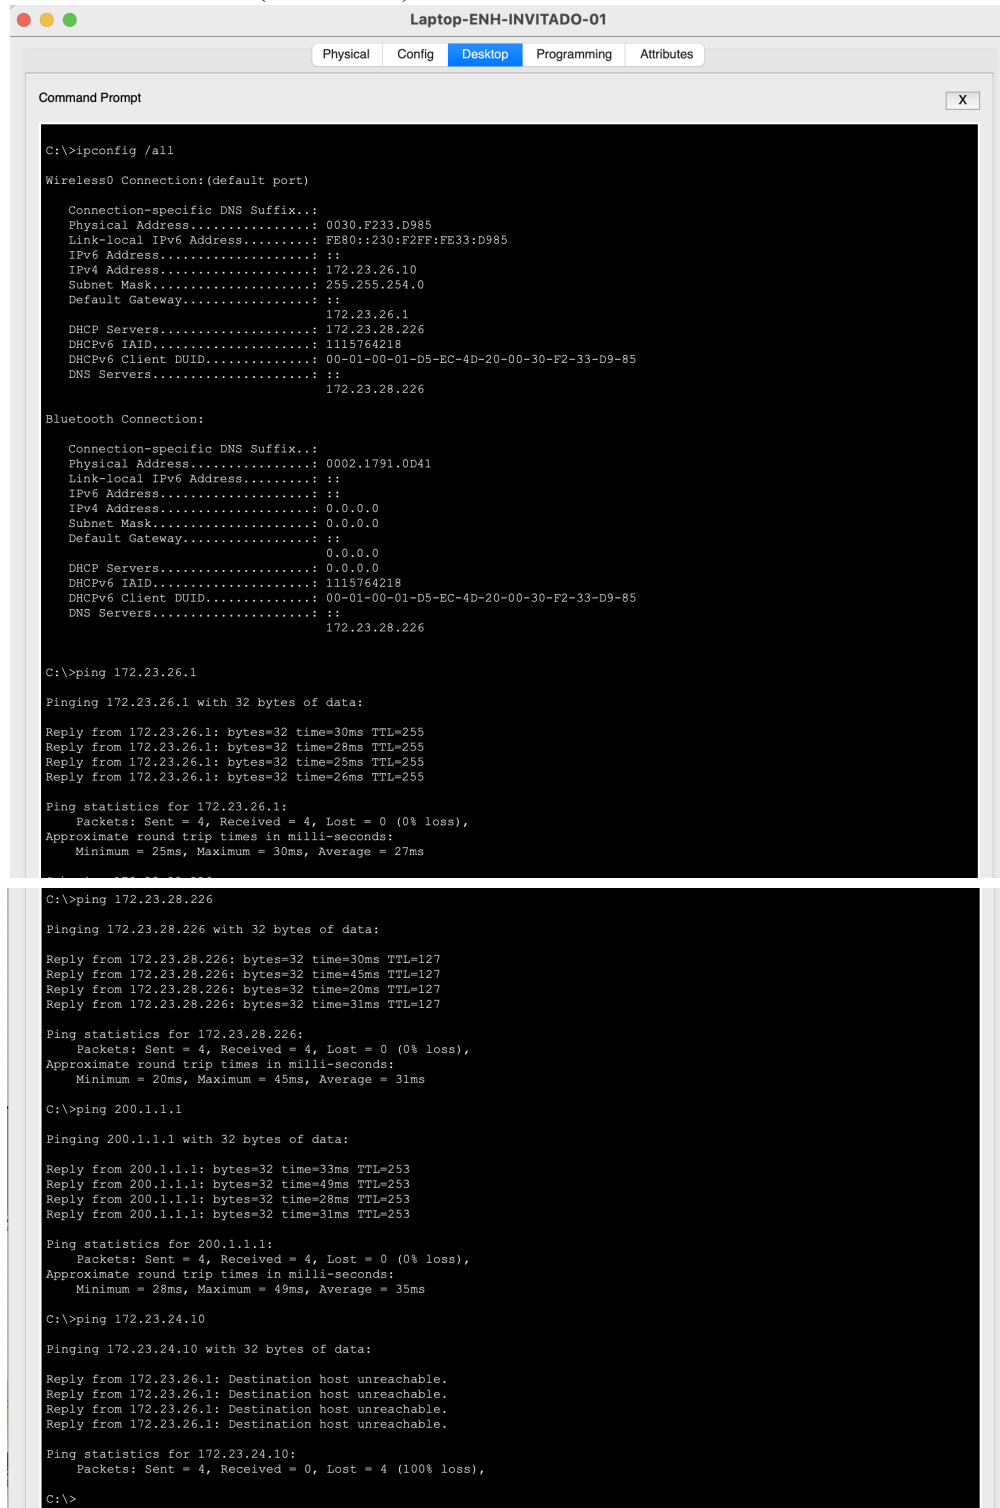

```
C:\>ipconfig /all

Wireless0 Connection:(default port)

    Connection-specific DNS Suffix...: 
    Physical Address...: 0030.F233.D985
    Link-local IPv6 Address...: FE80::230:F2FF:FE33:D985
    IPv6 Address...: 
    IPv4 Address...: 172.23.26.10
    Subnet Mask...: 255.255.254.0
    Default Gateway...: 
    DHCP Servers...: 172.23.26.1
    DHCPv6 IAID...: 172.23.28.226
    DHCPv6 IALD...: 1115764218
    DHCPv6 Client DUID...: 00-01-00-01-D5-EC-4D-20-00-30-F2-33-D9-85
    DNS Servers...: 172.23.28.226

Bluetooth Connection:

    Connection-specific DNS Suffix...: 
    Physical Address...: 0002.1791.0D41
    Link-local IPv6 Address...: 
    IPv6 Address...: 
    IPv4 Address...: 0.0.0.0
    Subnet Mask...: 0.0.0.0
    Default Gateway...: 
    DHCP Servers...: 0.0.0.0
    DHCPv6 IAID...: 0.0.0.0
    DHCPv6 IALD...: 1115764218
    DHCPv6 Client DUID...: 00-01-00-01-D5-EC-4D-20-00-30-F2-33-D9-85
    DNS Servers...: 172.23.28.226

C:\>ping 172.23.26.1

Pinging 172.23.26.1 with 32 bytes of data:

Reply from 172.23.26.1: bytes=32 time=30ms TTL=255
Reply from 172.23.26.1: bytes=32 time=28ms TTL=255
Reply from 172.23.26.1: bytes=32 time=25ms TTL=255
Reply from 172.23.26.1: bytes=32 time=26ms TTL=255

Ping statistics for 172.23.26.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 25ms, Maximum = 30ms, Average = 27ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time=30ms TTL=127
Reply from 172.23.28.226: bytes=32 time=45ms TTL=127
Reply from 172.23.28.226: bytes=32 time=20ms TTL=127
Reply from 172.23.28.226: bytes=32 time=31ms TTL=127

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 20ms, Maximum = 45ms, Average = 31ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:

Reply from 200.1.1.1: bytes=32 time=33ms TTL=253
Reply from 200.1.1.1: bytes=32 time=49ms TTL=253
Reply from 200.1.1.1: bytes=32 time=28ms TTL=253
Reply from 200.1.1.1: bytes=32 time=31ms TTL=253

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 28ms, Maximum = 49ms, Average = 35ms

C:\>ping 172.23.24.10

Pinging 172.23.24.10 with 32 bytes of data:


Reply from 172.23.26.1: Destination host unreachable.
Reply from 172.23.26.1: Destination host unreachable.
Reply from 172.23.26.1: Destination host unreachable.
Reply from 172.23.26.1: Destination host unreachable.

Ping statistics for 172.23.24.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

Laptop-CIT-INVITADO

Comandos: ipconfig /all; ping 172.23.26.1; ping 172.23.28.226; ping 200.1.1.1; ping <IP-PC-CONCURSANTE> (debe fallar)

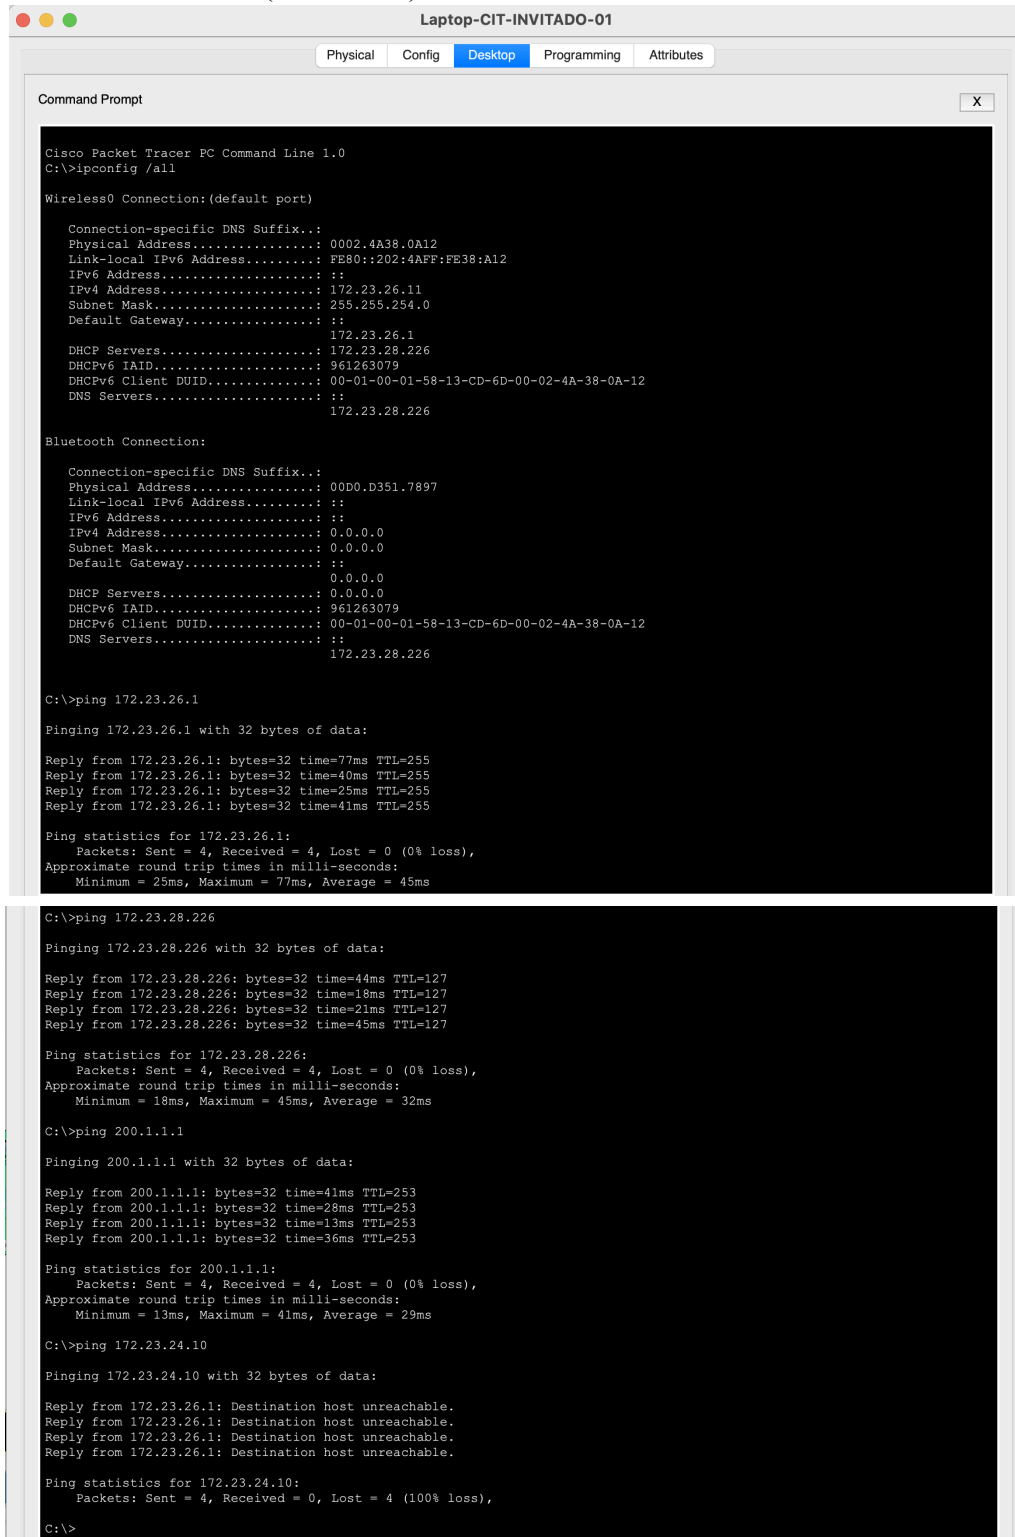

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig /all

Wireless0 Connection:(default port)

Connection-specific DNS Suffix...:
Physical Address. ....: 0002.4A38.0A12
Link-local IPv6 Address. ....: FE80::202:4A38:FE38:A12
IPv6 Address. ....: ::
IPv4 Address. ....: 172.23.26.11
Subnet Mask. ....: 255.255.254.0
Default Gateway. ....: ::
DHCP Servers. ....: 172.23.26.1
DHCPv6 IAID. ....: 172.23.28.226
DHCPv6 Client DUID. ....: 961263079
DNS Servers. ....: 00-01-00-01-58-13-CD-6D-00-02-4A-38-0A-12
DHCPv6 Client DUID. ....: ::
DNS Servers. ....: 172.23.28.226

Bluetooth Connection:

Connection-specific DNS Suffix...:
Physical Address. ....: 00D0.D351.7897
Link-local IPv6 Address. ....: ::
IPv6 Address. ....: ::
IPv4 Address. ....: 0.0.0.0
Subnet Mask. ....: 0.0.0.0
Default Gateway. ....: ::
DHCP Servers. ....: 0.0.0.0
DHCPv6 IAID. ....: 961263079
DHCPv6 Client DUID. ....: 00-01-00-01-58-13-CD-6D-00-02-4A-38-0A-12
DNS Servers. ....: ::
DNS Servers. ....: 172.23.28.226

C:\>ping 172.23.26.1

Pinging 172.23.26.1 with 32 bytes of data:

Reply from 172.23.26.1: bytes=32 time=77ms TTL=255
Reply from 172.23.26.1: bytes=32 time=40ms TTL=255
Reply from 172.23.26.1: bytes=32 time=25ms TTL=255
Reply from 172.23.26.1: bytes=32 time=41ms TTL=255

Ping statistics for 172.23.26.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 25ms, Maximum = 77ms, Average = 45ms

C:\>ping 172.23.28.226

Pinging 172.23.28.226 with 32 bytes of data:

Reply from 172.23.28.226: bytes=32 time=44ms TTL=127
Reply from 172.23.28.226: bytes=32 time=18ms TTL=127
Reply from 172.23.28.226: bytes=32 time=21ms TTL=127
Reply from 172.23.28.226: bytes=32 time=45ms TTL=127

Ping statistics for 172.23.28.226:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 18ms, Maximum = 45ms, Average = 32ms

C:\>ping 200.1.1.1

Pinging 200.1.1.1 with 32 bytes of data:

Reply from 200.1.1.1: bytes=32 time=41ms TTL=253
Reply from 200.1.1.1: bytes=32 time=28ms TTL=253
Reply from 200.1.1.1: bytes=32 time=13ms TTL=253
Reply from 200.1.1.1: bytes=32 time=36ms TTL=253

Ping statistics for 200.1.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 13ms, Maximum = 41ms, Average = 29ms

C:\>ping 172.23.24.10

Pinging 172.23.24.10 with 32 bytes of data:


Reply from 172.23.26.1: Destination host unreachable.
Reply from 172.23.26.1: Destination host unreachable.
Reply from 172.23.26.1: Destination host unreachable.
Reply from 172.23.26.1: Destination host unreachable.

Ping statistics for 172.23.24.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

Resolución DNS desde PC-CIT-CONG-01


Comandos: nslookup servicios.omi.local; nslookup concurso.omi.local. Deben resolver a 172.23.28.226 y 200.1.1.50.

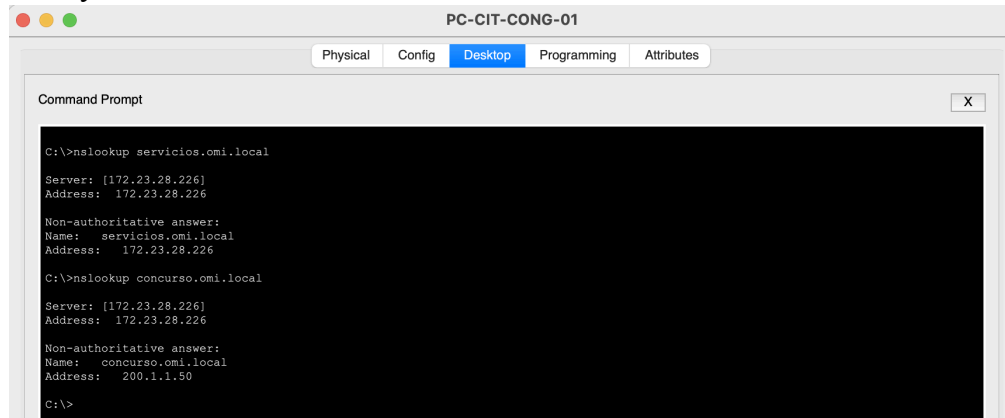

```
PC-CIT-CONG-01
Physical Config Desktop Programming Attributes
Command Prompt
C:\>nslookup servicios.omi.local
Server: [172.23.28.226]
Address: 172.23.28.226
Non-authoritative answer:
Name: servicios.omi.local
Address: 172.23.28.226
C:\>nslookup concurso.omi.local
Server: [172.23.28.226]
Address: 172.23.28.226
Non-authoritative answer:
Name: concurso.omi.local
Address: 200.1.1.50
C:\>
```


Página web interna

Comandos: En PC-CIT-CONG-01, abrir Desktop > Web Browser > <http://servicios.omi.local>. Debe mostrarse la página interna.

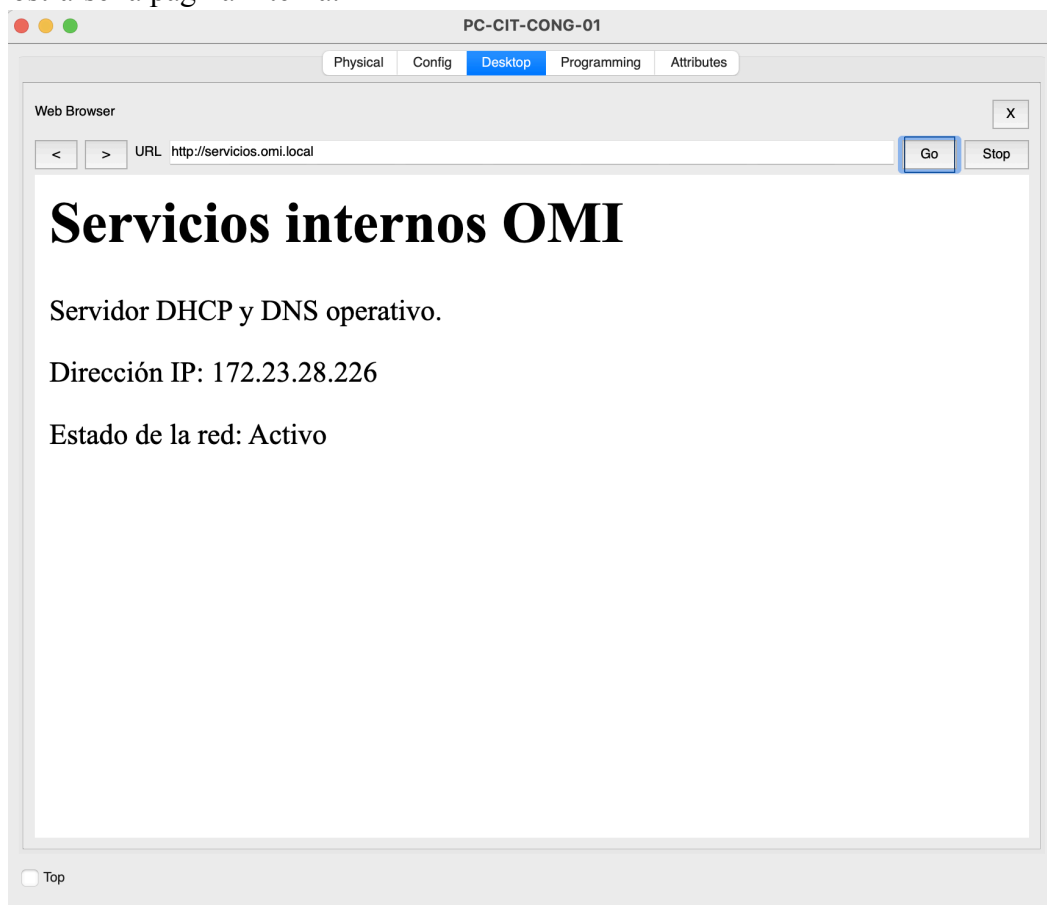


Página web Concurso

Comandos: En PC-CIT-CONG-01, abrir Desktop > Web Browser > <http://concurso.omi.local> y <http://200.1.1.50>. Debe mostrarse la página del concurso.

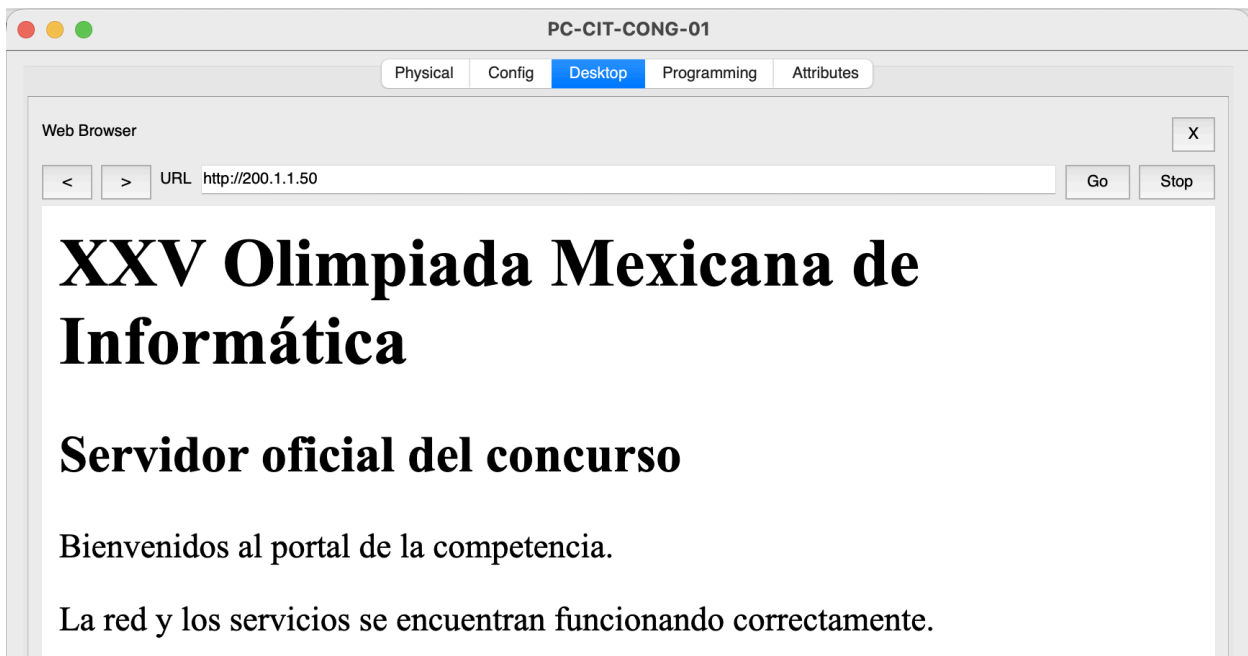

Impresoras

Comandos: ping hacia cada impresora desde una PC de su segmento.

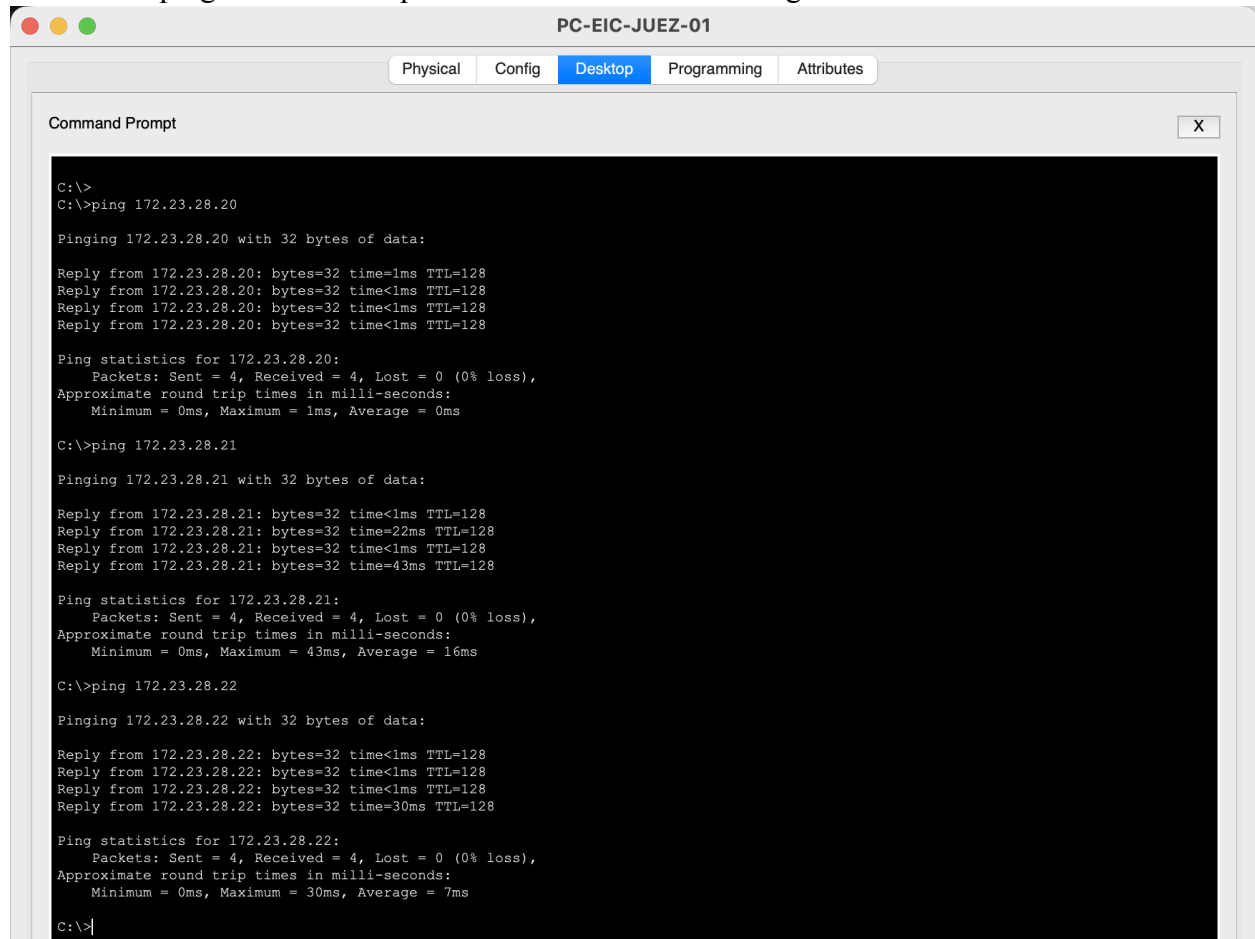

```
C:\>
C:\>ping 172.23.28.20

Pinging 172.23.28.20 with 32 bytes of data:

Reply from 172.23.28.20: bytes=32 time<1ms TTL=128
Reply from 172.23.28.20: bytes=32 time<1ms TTL=128
Reply from 172.23.28.20: bytes=32 time<1ms TTL=128
Reply from 172.23.28.20: bytes=32 time<1ms TTL=128

Ping statistics for 172.23.28.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 172.23.28.21

Pinging 172.23.28.21 with 32 bytes of data:

Reply from 172.23.28.21: bytes=32 time<1ms TTL=128
Reply from 172.23.28.21: bytes=32 time=22ms TTL=128
Reply from 172.23.28.21: bytes=32 time<1ms TTL=128
Reply from 172.23.28.21: bytes=32 time=43ms TTL=128

Ping statistics for 172.23.28.21:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 43ms, Average = 16ms

C:\>ping 172.23.28.22

Pinging 172.23.28.22 with 32 bytes of data:


Reply from 172.23.28.22: bytes=32 time<1ms TTL=128
Reply from 172.23.28.22: bytes=32 time<1ms TTL=128
Reply from 172.23.28.22: bytes=32 time<1ms TTL=128
Reply from 172.23.28.22: bytes=32 time=30ms TTL=128

Ping statistics for 172.23.28.22:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 30ms, Average = 7ms

C:\>|
```

Servidor DHCP-DNS-OMI

Comandos: Registrar 172.23.28.226/29 y comprobar ping hacia 172.23.28.225 y gateways internos.

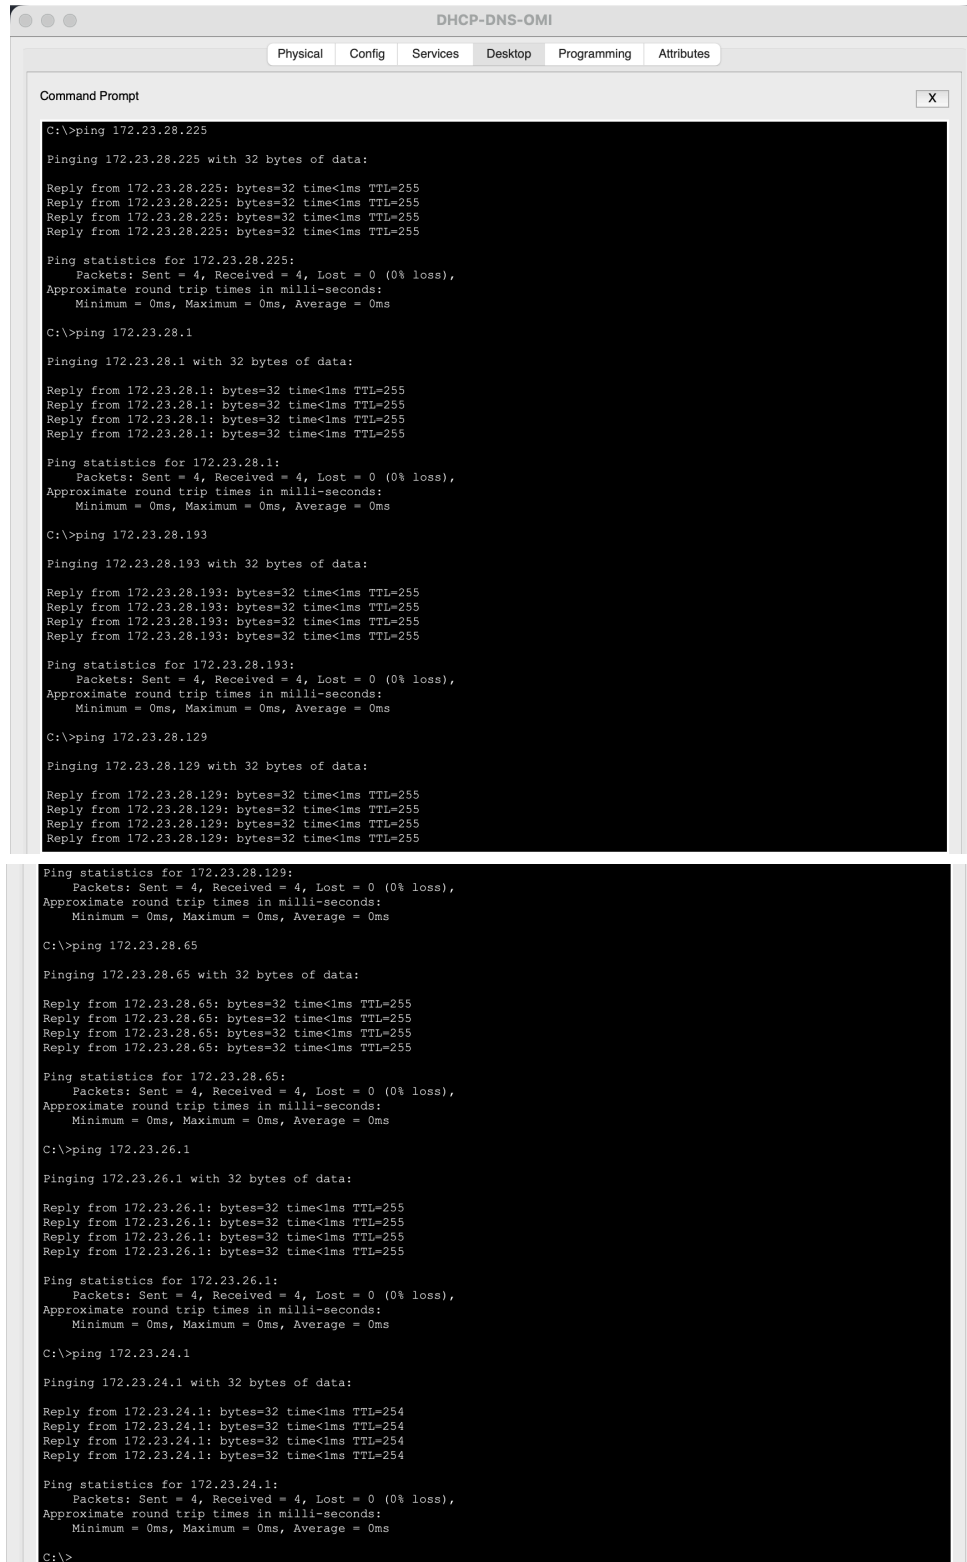

```
DHCP-DNS-OMI
Physical Config Services Desktop Programming Attributes

Command Prompt

C:\>ping 172.23.28.225

Pinging 172.23.28.225 with 32 bytes of data:

Reply from 172.23.28.225: bytes=32 time<1ms TTL=255
Reply from 172.23.28.225: bytes=32 time<1ms TTL=255
Reply from 172.23.28.225: bytes=32 time<1ms TTL=255
Reply from 172.23.28.225: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.28.225:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 172.23.28.1

Pinging 172.23.28.1 with 32 bytes of data:

Reply from 172.23.28.1: bytes=32 time<1ms TTL=255
Reply from 172.23.28.1: bytes=32 time<1ms TTL=255
Reply from 172.23.28.1: bytes=32 time<1ms TTL=255
Reply from 172.23.28.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.28.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 172.23.28.193

Pinging 172.23.28.193 with 32 bytes of data:

Reply from 172.23.28.193: bytes=32 time<1ms TTL=255
Reply from 172.23.28.193: bytes=32 time<1ms TTL=255
Reply from 172.23.28.193: bytes=32 time<1ms TTL=255
Reply from 172.23.28.193: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.28.193:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 172.23.28.129

Pinging 172.23.28.129 with 32 bytes of data:

Reply from 172.23.28.129: bytes=32 time<1ms TTL=255
Reply from 172.23.28.129: bytes=32 time<1ms TTL=255
Reply from 172.23.28.129: bytes=32 time<1ms TTL=255
Reply from 172.23.28.129: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.28.129:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 172.23.28.65

Pinging 172.23.28.65 with 32 bytes of data:

Reply from 172.23.28.65: bytes=32 time<1ms TTL=255
Reply from 172.23.28.65: bytes=32 time<1ms TTL=255
Reply from 172.23.28.65: bytes=32 time<1ms TTL=255
Reply from 172.23.28.65: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.28.65:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 172.23.26.1

Pinging 172.23.26.1 with 32 bytes of data:

Reply from 172.23.26.1: bytes=32 time<1ms TTL=255
Reply from 172.23.26.1: bytes=32 time<1ms TTL=255
Reply from 172.23.26.1: bytes=32 time<1ms TTL=255
Reply from 172.23.26.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.23.26.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 172.23.24.1

Pinging 172.23.24.1 with 32 bytes of data:

Reply from 172.23.24.1: bytes=32 time<1ms TTL=254
Reply from 172.23.24.1: bytes=32 time<1ms TTL=254
Reply from 172.23.24.1: bytes=32 time<1ms TTL=254
Reply from 172.23.24.1: bytes=32 time<1ms TTL=254

Ping statistics for 172.23.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```


Router Alumnos

Comandos: show ip interface brief; show ip route; show ip eigrp neighbors; ping 172.23.28.234; ping 172.23.28.226

```

IOS Command Line Interface

Alumnos>
Alumnos>en
Alumnos#show ip interface brief
Interface          IP-Address      OK? Method Status      Protocol
GigabitEthernet0/0 172.23.24.1     YES manual up          up
GigabitEthernet0/1 172.23.28.233   YES manual up          up
GigabitEthernet0/2 unassigned       YES unset  administratively down down
Vlan1               unassigned       YES unset  administratively down down

Alumnos#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is 172.23.28.234 to network 0.0.0.0

     172.23.0.0/16 is variably subnetted, 10 subnets, 6 masks
C       172.23.24.0/23 is directly connected, GigabitEthernet0/0
L       172.23.24.1/32 is directly connected, GigabitEthernet0/0
D       172.23.26.0/23 [90/28416] via 172.23.28.234, 02:00:44, GigabitEthernet0/1
D       172.23.28.0/27 [90/28416] via 172.23.28.234, 02:00:44, GigabitEthernet0/1
D       172.23.28.64/26 [90/28416] via 172.23.28.234, 02:00:44, GigabitEthernet0/1
D       172.23.28.128/26 [90/28416] via 172.23.28.234, 02:00:44, GigabitEthernet0/1
D       172.23.28.192/27 [90/28416] via 172.23.28.234, 02:00:44, GigabitEthernet0/1
D       172.23.28.224/29 [90/28416] via 172.23.28.234, 02:00:44, GigabitEthernet0/1
C       172.23.28.232/30 is directly connected, GigabitEthernet0/1
L       172.23.28.233/32 is directly connected, GigabitEthernet0/1
S*    0.0.0.0/0 [1/0] via 172.23.28.234

Alumnos#show ip eigrp neighbors
IP-EIGRP neighbors for process 777
H   Address           Interface    Hold Uptime   SRTT  RTO  Q   Seq
                   (sec)              (ms)          Cnt  Num
0   172.23.28.234      Gig0/1       12   02:01:01    40   1000  0    3

Alumnos#ping 172.23.28.234

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 172.23.28.234, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms

Alumnos#ping 172.23.28.226

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 172.23.28.226, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms

```

Router Frontera

Comandos: show ip interface brief; show ip route; show ip eigrp neighbors; show ip nat translations; ping 172.23.28.233; ping 172.23.28.226

```
IOS Command Line Interface

Frontera#show ip interface brief
Interface              IP-Address      OK? Method Status  Protocol
GigabitEthernet0/0     172.23.28.234   YES manual up      up
GigabitEthernet0/1     unassigned      YES NVRAM  up      up
GigabitEthernet0/1.10  172.23.28.1     YES manual up      up
GigabitEthernet0/1.20  172.23.28.65    YES manual up      up
GigabitEthernet0/1.30  172.23.28.129   YES manual up      up
GigabitEthernet0/1.40  172.23.26.1     YES manual up      up
GigabitEthernet0/1.60  172.23.28.193   YES manual up      up
GigabitEthernet0/1.70  172.23.28.225   YES manual up      up
GigabitEthernet0/2     10.32.100.100   YES manual up      up
Vlan1                  unassigned      YES unset  administratively down down

Frontera#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is 10.32.100.1 to network 0.0.0.0

    10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.32.100.0/24 is directly connected, GigabitEthernet0/2
L       10.32.100.100/32 is directly connected, GigabitEthernet0/2
    172.23.0.0/16 is variably subnetted, 15 subnets, 6 masks
D       172.23.24.0/23 [90/3072] via 172.23.28.233, 02:04:03, GigabitEthernet0/0
C       172.23.26.0/23 is directly connected, GigabitEthernet0/1.40
L       172.23.26.1/32 is directly connected, GigabitEthernet0/1.40
C       172.23.28.0/27 is directly connected, GigabitEthernet0/1.10
L       172.23.28.1/32 is directly connected, GigabitEthernet0/1.10
C       172.23.28.64/26 is directly connected, GigabitEthernet0/1.20
L       172.23.28.65/32 is directly connected, GigabitEthernet0/1.20
C       172.23.28.128/26 is directly connected, GigabitEthernet0/1.30
L       172.23.28.129/32 is directly connected, GigabitEthernet0/1.30
C       172.23.28.192/27 is directly connected, GigabitEthernet0/1.60
L       172.23.28.193/32 is directly connected, GigabitEthernet0/1.60
C       172.23.28.224/29 is directly connected, GigabitEthernet0/1.70
L       172.23.28.225/32 is directly connected, GigabitEthernet0/1.70
C       172.23.28.232/30 is directly connected, GigabitEthernet0/0
L       172.23.28.234/32 is directly connected, GigabitEthernet0/0
S*    0.0.0.0/0 [1/0] via 10.32.100.1

Frontera#show ip eigrp neighbors
IP-EIGRP neighbors for process 777
H   Address           Interface      Hold Uptime   SRTT   RTO   Q   Seq
                               (sec)          (ms)                Cnt  Num
0   172.23.28.233      Gig0/0         10   02:04:20   40     1000   0   13

Frontera#show ip nat translations
Frontera#ping 172.23.28.233

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 172.23.28.233, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms


Frontera#ping 172.23.28.226

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 172.23.28.226, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms

Frontera#
```

Seguridad CLI de routers

Comandos: Cerrar y abrir CLI para mostrar solicitud de contraseña Consola OMI; ejecutar enable y mostrar solicitud de OMI2026.

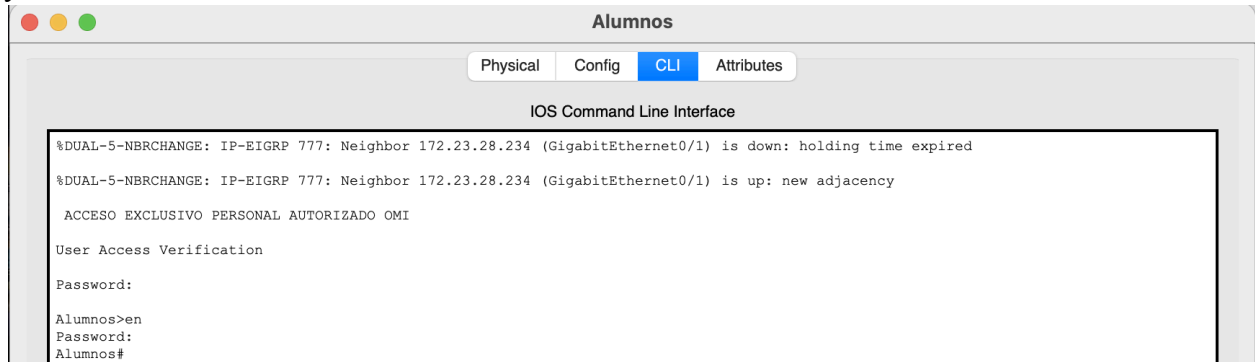


```

Alumnos
Physical Config CLI Attributes
IOS Command Line Interface
%DUAL-5-NBRCHANGE: IP-EIGRP 777: Neighbor 172.23.28.234 (GigabitEthernet0/1) is down: holding time expired
%DUAL-5-NBRCHANGE: IP-EIGRP 777: Neighbor 172.23.28.234 (GigabitEthernet0/1) is up: new adjacency
ACCESO EXCLUSIVO PERSONAL AUTORIZADO OMI
User Access Verification
Password:
Alumnos>en
Password:
Alumnos#
  
```

DIST-ALUMNOS

Comandos: show cdp neighbors; show interfaces status

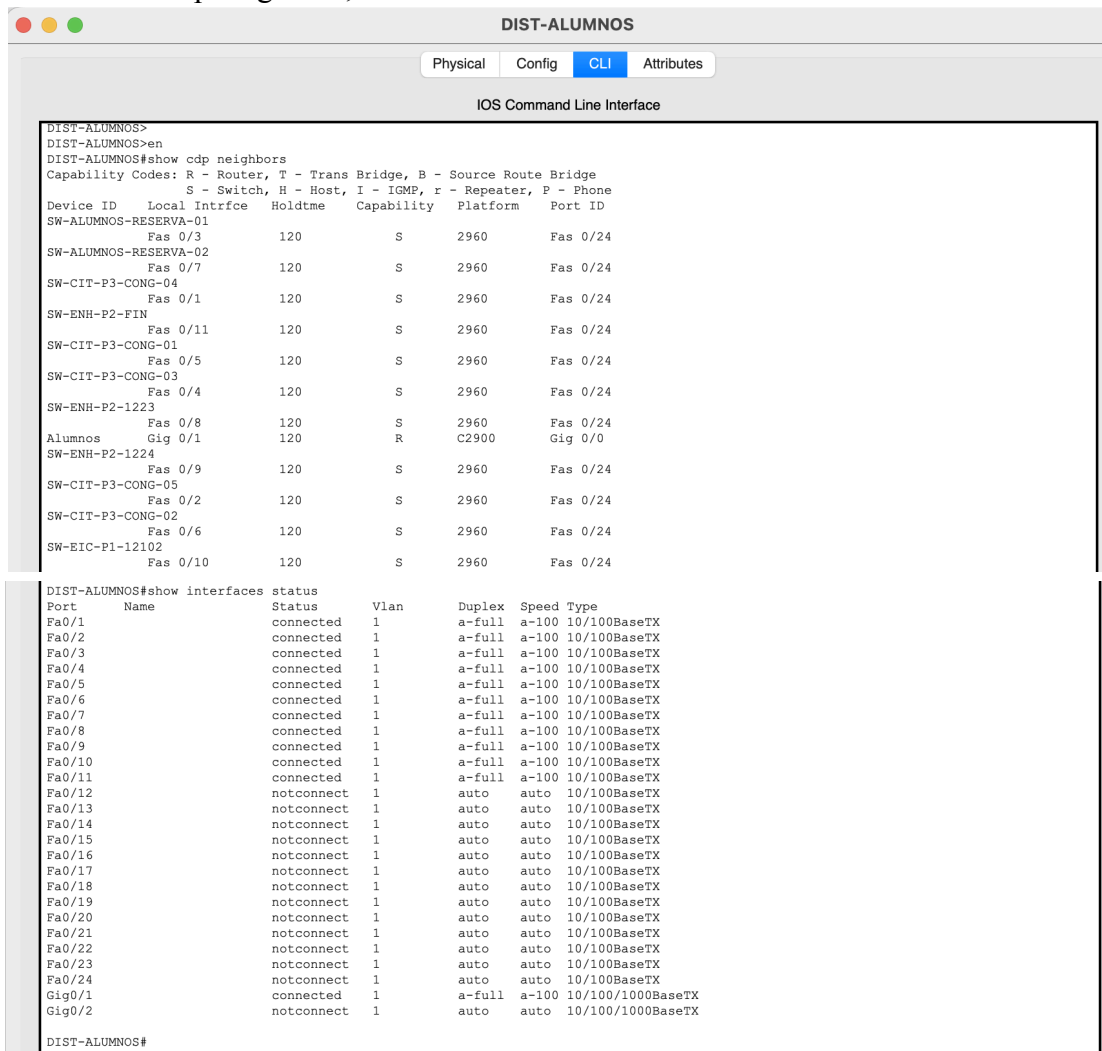

```

DIST-ALUMNOS
Physical Config CLI Attributes
IOS Command Line Interface
DIST-ALUMNOS>
DIST-ALUMNOS>en
DIST-ALUMNOS#show cdp neighbors
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone
Device ID      Local Intrfce   Holdtme    Capability  Platform  Port ID
SW-ALUMNOS-RESERVA-01
  Fas 0/3              120        S           2960       Fas 0/24
SW-ALUMNOS-RESERVA-02
  Fas 0/7              120        S           2960       Fas 0/24
SW-CIT-P3-CONG-04
  Fas 0/1              120        S           2960       Fas 0/24
SW-ENH-P2-FIN
  Fas 0/11             120        S           2960       Fas 0/24
SW-CIT-P3-CONG-01
  Fas 0/5              120        S           2960       Fas 0/24
SW-CIT-P3-CONG-03
  Fas 0/4              120        S           2960       Fas 0/24
SW-ENH-P2-1223
  Fas 0/8              120        S           2960       Fas 0/24
Alumnos         Gig 0/1         120        R           C2900      Gig 0/0
SW-ENH-P2-1224
  Fas 0/9              120        S           2960       Fas 0/24
SW-CIT-P3-CONG-05
  Fas 0/2              120        S           2960       Fas 0/24
SW-CIT-P3-CONG-02
  Fas 0/6              120        S           2960       Fas 0/24
SW-EIC-P1-12102
  Fas 0/10             120        S           2960       Fas 0/24

DIST-ALUMNOS#show interfaces status
Port      Name      Status      Vlan    Duplex  Speed Type
Fa0/1     connected 1           a-full  a-100  10/100BaseTX
Fa0/2     connected 1           a-full  a-100  10/100BaseTX
Fa0/3     connected 1           a-full  a-100  10/100BaseTX
Fa0/4     connected 1           a-full  a-100  10/100BaseTX
Fa0/5     connected 1           a-full  a-100  10/100BaseTX
Fa0/6     connected 1           a-full  a-100  10/100BaseTX
Fa0/7     connected 1           a-full  a-100  10/100BaseTX
Fa0/8     connected 1           a-full  a-100  10/100BaseTX
Fa0/9     connected 1           a-full  a-100  10/100BaseTX
Fa0/10    connected 1           a-full  a-100  10/100BaseTX
Fa0/11    connected 1           a-full  a-100  10/100BaseTX
Fa0/12    notconnect 1           auto    auto   10/100BaseTX
Fa0/13    notconnect 1           auto    auto   10/100BaseTX
Fa0/14    notconnect 1           auto    auto   10/100BaseTX
Fa0/15    notconnect 1           auto    auto   10/100BaseTX
Fa0/16    notconnect 1           auto    auto   10/100BaseTX
Fa0/17    notconnect 1           auto    auto   10/100BaseTX
Fa0/18    notconnect 1           auto    auto   10/100BaseTX
Fa0/19    notconnect 1           auto    auto   10/100BaseTX
Fa0/20    notconnect 1           auto    auto   10/100BaseTX
Fa0/21    notconnect 1           auto    auto   10/100BaseTX
Fa0/22    notconnect 1           auto    auto   10/100BaseTX
Fa0/23    notconnect 1           auto    auto   10/100BaseTX
Fa0/24    notconnect 1           auto    auto   10/100BaseTX
Gig0/1    connected 1           a-full  a-100  10/100/1000BaseTX
Gig0/2    notconnect 1           auto    auto   10/100/1000BaseTX

DIST-ALUMNOS#
  
```

SWDistribucionExternos

Comandos: show vlan brief; show interfaces trunk; show interfaces status

```

IOS Command Line Interface

SWDistribucionExternos>en
SWDistribucionExternos#show vlan brief

VLAN Name                Status    Ports
-----
1    default                active    Fa0/3, Fa0/4, Fa0/5, Fa0/6
                                           Fa0/7, Fa0/8, Fa0/9, Fa0/12
                                           Fa0/13, Fa0/14, Fa0/16, Fa0/17
                                           Fa0/18, Fa0/19, Fa0/23, Gig0/2
10   JUECES                  active    Fa0/15
20   ENTRENADORES           active    Fa0/10, Fa0/11
30   PRENSA                  active    Fa0/1, Fa0/2
40   INVITADOS              active    Fa0/20, Fa0/21, Fa0/22
60   INFRAESTRUCTURA        active
70   SERVIDORES              active    Fa0/24
1002 fddi-default            active
1003 token-ring-default    active
1004 fddinet-default        active
1005 trnet-default          active

SWDistribucionExternos#show interfaces trunk

Port      Mode      Encapsulation  Status      Native vlan
Gig0/1     on        802.1q         trunking    1

Port      Vlans allowed on trunk
Gig0/1     10,20,30,40,60,70

Port      Vlans allowed and active in management domain
Gig0/1     10,20,30,40,60,70

Port      Vlans in spanning tree forwarding state and not pruned
Gig0/1     10,20,30,40,60,70

SWDistribucionExternos#show interfaces status

Port      Name                Status      Vlan    Duplex  Speed  Type
-----
Fa0/1     connected           30          a-full  a-100  10/100BaseTX
Fa0/2     connected           30          a-full  a-100  10/100BaseTX
Fa0/3     notconnect          1           auto    auto    10/100BaseTX
Fa0/4     notconnect          1           auto    auto    10/100BaseTX
Fa0/5     notconnect          1           auto    auto    10/100BaseTX
Fa0/6     notconnect          1           auto    auto    10/100BaseTX
Fa0/7     notconnect          1           auto    auto    10/100BaseTX
Fa0/8     notconnect          1           auto    auto    10/100BaseTX
Fa0/9     notconnect          1           auto    auto    10/100BaseTX
Fa0/10    connected           20          a-full  a-100  10/100BaseTX
Fa0/11    connected           20          a-full  a-100  10/100BaseTX
Fa0/12    notconnect          1           auto    auto    10/100BaseTX
Fa0/13    notconnect          1           auto    auto    10/100BaseTX
Fa0/14    notconnect          1           auto    auto    10/100BaseTX
Fa0/15    connected           10          a-full  a-100  10/100BaseTX
Fa0/16    notconnect          1           auto    auto    10/100BaseTX
Fa0/17    notconnect          1           auto    auto    10/100BaseTX
Fa0/18    notconnect          1           auto    auto    10/100BaseTX
Fa0/19    notconnect          1           auto    auto    10/100BaseTX
Fa0/20    connected           40          a-full  a-100  10/100BaseTX
Fa0/21    AP-ESPERA-INVITADO connected       40          a-full  a-100  10/100BaseTX
Fa0/22    AP-ESPERA-INVITADO connected       40          a-full  a-100  10/100BaseTX
Fa0/23    notconnect          1           auto    auto    10/100BaseTX
Fa0/24    SERVIDOR-DHCP-DNS- connected       70          a-full  a-100  10/100BaseTX
Gig0/1    connected           trunk       a-full  a-100  10/100/1000BaseTX
Gig0/2    notconnect          1           auto    auto    10/100/1000BaseTX

SWDistribucionExternos#

```

Switches de concursantes

Comandos: En cada switch: show interfaces status; show cdp neighbors. Mostrar Fa0/24 conectado al puerto correspondiente de DIST-ALUMNOS.

SW-ALUMNOS-RESERVA-01

Physical Config CLI Attributes

IOS Command Line Interface

User Access Verification

Password:

SW-ALUMNOS-RESERVA-01>en

Password:

SW-ALUMNOS-RESERVA-01#show interfaces status

Port	Name	Status	Vlan	Duplex	Speed	Type
Fa0/1		connected	1	a-full	a-100	10/100BaseTX
Fa0/2		notconnect	1	auto	auto	10/100BaseTX
Fa0/3		notconnect	1	auto	auto	10/100BaseTX
Fa0/4		notconnect	1	auto	auto	10/100BaseTX
Fa0/5		notconnect	1	auto	auto	10/100BaseTX
Fa0/6		notconnect	1	auto	auto	10/100BaseTX
Fa0/7		notconnect	1	auto	auto	10/100BaseTX
Fa0/8		notconnect	1	auto	auto	10/100BaseTX
Fa0/9		notconnect	1	auto	auto	10/100BaseTX
Fa0/10		notconnect	1	auto	auto	10/100BaseTX
Fa0/11		notconnect	1	auto	auto	10/100BaseTX
Fa0/12		notconnect	1	auto	auto	10/100BaseTX
Fa0/13		notconnect	1	auto	auto	10/100BaseTX
Fa0/14		notconnect	1	auto	auto	10/100BaseTX
Fa0/15		notconnect	1	auto	auto	10/100BaseTX
Fa0/16		notconnect	1	auto	auto	10/100BaseTX
Fa0/17		notconnect	1	auto	auto	10/100BaseTX
Fa0/18		notconnect	1	auto	auto	10/100BaseTX
Fa0/19		notconnect	1	auto	auto	10/100BaseTX
Fa0/20		notconnect	1	auto	auto	10/100BaseTX
Fa0/21		notconnect	1	auto	auto	10/100BaseTX

SW-ALUMNOS-RESERVA-01#show cdp neighbors

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge

S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
DIST-ALUMNOS	Fas 0/24	139	S	2960	Fas 0/3

SW-ALUMNOS-RESERVA-01#

SW-ALUMNOS-RESERVA-02

Physical Config CLI Attributes

IOS Command Line Interface

User Access Verification

Password:

SW-ALUMNOS-RESERVA-02>en

Password:

SW-ALUMNOS-RESERVA-02#show interfaces status

Port	Name	Status	Vlan	Duplex	Speed	Type
Fa0/1		connected	1	a-full	a-100	10/100BaseTX
Fa0/2		notconnect	1	auto	auto	10/100BaseTX
Fa0/3		notconnect	1	auto	auto	10/100BaseTX
Fa0/4		notconnect	1	auto	auto	10/100BaseTX
Fa0/5		notconnect	1	auto	auto	10/100BaseTX
Fa0/6		notconnect	1	auto	auto	10/100BaseTX
Fa0/7		notconnect	1	auto	auto	10/100BaseTX
Fa0/8		notconnect	1	auto	auto	10/100BaseTX
Fa0/9		notconnect	1	auto	auto	10/100BaseTX
Fa0/10		notconnect	1	auto	auto	10/100BaseTX
Fa0/11		notconnect	1	auto	auto	10/100BaseTX
Fa0/12		notconnect	1	auto	auto	10/100BaseTX
Fa0/13		notconnect	1	auto	auto	10/100BaseTX
Fa0/14		notconnect	1	auto	auto	10/100BaseTX
Fa0/15		notconnect	1	auto	auto	10/100BaseTX
Fa0/16		notconnect	1	auto	auto	10/100BaseTX
Fa0/17		notconnect	1	auto	auto	10/100BaseTX
Fa0/18		notconnect	1	auto	auto	10/100BaseTX
Fa0/19		notconnect	1	auto	auto	10/100BaseTX
Fa0/20		notconnect	1	auto	auto	10/100BaseTX
Fa0/21		notconnect	1	auto	auto	10/100BaseTX

SW-ALUMNOS-RESERVA-02#show cdp neighbors

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge

S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
DIST-ALUMNOS	Fas 0/24	140	S	2960	Fas 0/7

SW-ALUMNOS-RESERVA-02#

SW-CIT-P3-CONG-01

Physical Config CLI Attributes

IOS Command Line Interface

User Access Verification

Password:

SW-CIT-P3-CONG-01>en

Password:

SW-CIT-P3-CONG-01#show interfaces status

Port	Name	Status	Vlan	Duplex	Speed	Type
Fa0/1		connected	1	a-full	a-100	10/100BaseTX
Fa0/2		notconnect	1	auto	auto	10/100BaseTX
Fa0/3		notconnect	1	auto	auto	10/100BaseTX
Fa0/4		notconnect	1	auto	auto	10/100BaseTX
Fa0/5		notconnect	1	auto	auto	10/100BaseTX
Fa0/6		notconnect	1	auto	auto	10/100BaseTX
Fa0/7		notconnect	1	auto	auto	10/100BaseTX
Fa0/8		notconnect	1	auto	auto	10/100BaseTX
Fa0/9		notconnect	1	auto	auto	10/100BaseTX
Fa0/10		notconnect	1	auto	auto	10/100BaseTX
Fa0/11		notconnect	1	auto	auto	10/100BaseTX
Fa0/12		notconnect	1	auto	auto	10/100BaseTX
Fa0/13		notconnect	1	auto	auto	10/100BaseTX
Fa0/14		notconnect	1	auto	auto	10/100BaseTX
Fa0/15		notconnect	1	auto	auto	10/100BaseTX
Fa0/16		notconnect	1	auto	auto	10/100BaseTX
Fa0/17		notconnect	1	auto	auto	10/100BaseTX
Fa0/18		notconnect	1	auto	auto	10/100BaseTX
Fa0/19		notconnect	1	auto	auto	10/100BaseTX
Fa0/20		notconnect	1	auto	auto	10/100BaseTX
Fa0/21		notconnect	1	auto	auto	10/100BaseTX

SW-CIT-P3-CONG-01#show cdp neighbors

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge

S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
DIST-ALUMNOS	Fas 0/24	173	S	2960	Fas 0/5

SW-CIT-P3-CONG-01#

SW-CIT-P3-CONG-02

Physical Config CLI Attributes

IOS Command Line Interface

User Access Verification

Password:

SW-CIT-P3-CONG-02>en

Password:

SW-CIT-P3-CONG-02#show interfaces status

Port	Name	Status	Vlan	Duplex	Speed	Type
Fa0/1		connected	1	a-full	a-100	10/100BaseTX
Fa0/2		notconnect	1	auto	auto	10/100BaseTX
Fa0/3		notconnect	1	auto	auto	10/100BaseTX
Fa0/4		notconnect	1	auto	auto	10/100BaseTX
Fa0/5		notconnect	1	auto	auto	10/100BaseTX
Fa0/6		notconnect	1	auto	auto	10/100BaseTX
Fa0/7		notconnect	1	auto	auto	10/100BaseTX
Fa0/8		notconnect	1	auto	auto	10/100BaseTX
Fa0/9		notconnect	1	auto	auto	10/100BaseTX
Fa0/10		notconnect	1	auto	auto	10/100BaseTX
Fa0/11		notconnect	1	auto	auto	10/100BaseTX
Fa0/12		notconnect	1	auto	auto	10/100BaseTX
Fa0/13		notconnect	1	auto	auto	10/100BaseTX
Fa0/14		notconnect	1	auto	auto	10/100BaseTX
Fa0/15		notconnect	1	auto	auto	10/100BaseTX
Fa0/16		notconnect	1	auto	auto	10/100BaseTX
Fa0/17		notconnect	1	auto	auto	10/100BaseTX
Fa0/18		notconnect	1	auto	auto	10/100BaseTX
Fa0/19		notconnect	1	auto	auto	10/100BaseTX
Fa0/20		notconnect	1	auto	auto	10/100BaseTX
Fa0/21		notconnect	1	auto	auto	10/100BaseTX

SW-CIT-P3-CONG-02#show cdp neighbors

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge

S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
DIST-ALUMNOS	Fas 0/24	145	S	2960	Fas 0/6

SW-CIT-P3-CONG-02#

SW-CIT-P3-CONG-03

Physical
Config
CLI
Attributes

IOS Command Line Interface

```

User Access Verification

Password:

SW-CIT-P3-CONG-03>en
Password:
SW-CIT-P3-CONG-03#show interfaces status
Port      Name      Status      Vlan      Duplex  Speed  Type
Fa0/1     connected  1           a-full   a-100   10/100BaseTX
Fa0/2     notconnect 1           auto     auto    10/100BaseTX
Fa0/3     notconnect 1           auto     auto    10/100BaseTX
Fa0/4     notconnect 1           auto     auto    10/100BaseTX
Fa0/5     notconnect 1           auto     auto    10/100BaseTX
Fa0/6     notconnect 1           auto     auto    10/100BaseTX
Fa0/7     notconnect 1           auto     auto    10/100BaseTX
Fa0/8     notconnect 1           auto     auto    10/100BaseTX
Fa0/9     notconnect 1           auto     auto    10/100BaseTX
Fa0/10    notconnect 1           auto     auto    10/100BaseTX
Fa0/11    notconnect 1           auto     auto    10/100BaseTX
Fa0/12    notconnect 1           auto     auto    10/100BaseTX
Fa0/13    notconnect 1           auto     auto    10/100BaseTX
Fa0/14    notconnect 1           auto     auto    10/100BaseTX
Fa0/15    notconnect 1           auto     auto    10/100BaseTX
Fa0/16    notconnect 1           auto     auto    10/100BaseTX
Fa0/17    notconnect 1           auto     auto    10/100BaseTX
Fa0/18    notconnect 1           auto     auto    10/100BaseTX
Fa0/19    notconnect 1           auto     auto    10/100BaseTX
Fa0/20    notconnect 1           auto     auto    10/100BaseTX
Fa0/21    notconnect 1           auto     auto    10/100BaseTX

SW-CIT-P3-CONG-03#show cdp neighbors
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone
Device ID      Local Intrfce  Holdtme  Capability  Platform  Port ID
DIST-ALUMNOS
                Fas 0/24      177      S           2960      Fas 0/4

SW-CIT-P3-CONG-03#

```

SW-CIT-P3-CONG-04

Physical
Config
CLI
Attributes

IOS Command Line Interface

```

User Access Verification

Password:

SW-CIT-P3-CONG-04>en
Password:
SW-CIT-P3-CONG-04#show interfaces status
Port      Name      Status      Vlan      Duplex  Speed  Type
Fa0/1     connected  1           a-full   a-100   10/100BaseTX
Fa0/2     notconnect 1           auto     auto    10/100BaseTX
Fa0/3     notconnect 1           auto     auto    10/100BaseTX
Fa0/4     notconnect 1           auto     auto    10/100BaseTX
Fa0/5     notconnect 1           auto     auto    10/100BaseTX
Fa0/6     notconnect 1           auto     auto    10/100BaseTX
Fa0/7     notconnect 1           auto     auto    10/100BaseTX
Fa0/8     notconnect 1           auto     auto    10/100BaseTX
Fa0/9     notconnect 1           auto     auto    10/100BaseTX
Fa0/10    notconnect 1           auto     auto    10/100BaseTX
Fa0/11    notconnect 1           auto     auto    10/100BaseTX
Fa0/12    notconnect 1           auto     auto    10/100BaseTX
Fa0/13    notconnect 1           auto     auto    10/100BaseTX
Fa0/14    notconnect 1           auto     auto    10/100BaseTX
Fa0/15    notconnect 1           auto     auto    10/100BaseTX
Fa0/16    notconnect 1           auto     auto    10/100BaseTX
Fa0/17    notconnect 1           auto     auto    10/100BaseTX
Fa0/18    notconnect 1           auto     auto    10/100BaseTX
Fa0/19    notconnect 1           auto     auto    10/100BaseTX
Fa0/20    notconnect 1           auto     auto    10/100BaseTX
Fa0/21    notconnect 1           auto     auto    10/100BaseTX

SW-CIT-P3-CONG-04#show cdp neighbors
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone
Device ID      Local Intrfce  Holdtme  Capability  Platform  Port ID
DIST-ALUMNOS
                Fas 0/24      149      S           2960      Fas 0/1

SW-CIT-P3-CONG-04#

```

SW-CIT-P3-CONG-05

Physical Config CLI Attributes

IOS Command Line Interface

```
User Access Verification

Password:

SW-CIT-P3-CONG-05>en
Password:
SW-CIT-P3-CONG-05#show interfaces status
Port      Name      Status      Vlan      Duplex  Speed  Type
Fa0/1     connected 1           a-full    a-100   10/100BaseTX
Fa0/2     notconnect 1           auto      auto    10/100BaseTX
Fa0/3     notconnect 1           auto      auto    10/100BaseTX
Fa0/4     notconnect 1           auto      auto    10/100BaseTX
Fa0/5     notconnect 1           auto      auto    10/100BaseTX
Fa0/6     notconnect 1           auto      auto    10/100BaseTX
Fa0/7     notconnect 1           auto      auto    10/100BaseTX
Fa0/8     notconnect 1           auto      auto    10/100BaseTX
Fa0/9     notconnect 1           auto      auto    10/100BaseTX
Fa0/10    notconnect 1           auto      auto    10/100BaseTX
Fa0/11    notconnect 1           auto      auto    10/100BaseTX
Fa0/12    notconnect 1           auto      auto    10/100BaseTX
Fa0/13    notconnect 1           auto      auto    10/100BaseTX
Fa0/14    notconnect 1           auto      auto    10/100BaseTX
Fa0/15    notconnect 1           auto      auto    10/100BaseTX
Fa0/16    notconnect 1           auto      auto    10/100BaseTX
Fa0/17    notconnect 1           auto      auto    10/100BaseTX
Fa0/18    notconnect 1           auto      auto    10/100BaseTX
Fa0/19    notconnect 1           auto      auto    10/100BaseTX
Fa0/20    notconnect 1           auto      auto    10/100BaseTX
Fa0/21    notconnect 1           auto      auto    10/100BaseTX

SW-CIT-P3-CONG-05#show cdp neighbors
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone
Device ID      Local Intrfce  Holdtme  Capability  Platform  Port ID
DIST-ALUMNOS   Fas 0/24      126      S           2960      Fas 0/2

SW-CIT-P3-CONG-05#
```

SW-EIC-P1-12102

Physical Config CLI Attributes

IOS Command Line Interface

```
User Access Verification

Password:

SW-EIC-P1-12102>en
Password:
SW-EIC-P1-12102#show interfaces status
Port      Name      Status      Vlan      Duplex  Speed  Type
Fa0/1     connected 1           a-full    a-100   10/100BaseTX
Fa0/2     notconnect 1           auto      auto    10/100BaseTX
Fa0/3     notconnect 1           auto      auto    10/100BaseTX
Fa0/4     notconnect 1           auto      auto    10/100BaseTX
Fa0/5     notconnect 1           auto      auto    10/100BaseTX
Fa0/6     notconnect 1           auto      auto    10/100BaseTX
Fa0/7     notconnect 1           auto      auto    10/100BaseTX
Fa0/8     notconnect 1           auto      auto    10/100BaseTX
Fa0/9     notconnect 1           auto      auto    10/100BaseTX
Fa0/10    notconnect 1           auto      auto    10/100BaseTX
Fa0/11    notconnect 1           auto      auto    10/100BaseTX
Fa0/12    notconnect 1           auto      auto    10/100BaseTX
Fa0/13    notconnect 1           auto      auto    10/100BaseTX
Fa0/14    notconnect 1           auto      auto    10/100BaseTX
Fa0/15    notconnect 1           auto      auto    10/100BaseTX
Fa0/16    notconnect 1           auto      auto    10/100BaseTX
Fa0/17    notconnect 1           auto      auto    10/100BaseTX
Fa0/18    notconnect 1           auto      auto    10/100BaseTX
Fa0/19    notconnect 1           auto      auto    10/100BaseTX
Fa0/20    notconnect 1           auto      auto    10/100BaseTX
Fa0/21    notconnect 1           auto      auto    10/100BaseTX

SW-EIC-P1-12102#show cdp neighbors
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone
Device ID      Local Intrfce  Holdtme  Capability  Platform  Port ID
DIST-ALUMNOS   Fas 0/24      161      S           2960      Fas 0/10

SW-EIC-P1-12102#
```


SW-ENH-P2-1223

Physical Config CLI Attributes

IOS Command Line Interface

User Access Verification

Password:

SW-ENH-P2-1223>en

Password:

SW-ENH-P2-1223#show interfaces status

Port	Name	Status	Vlan	Duplex	Speed	Type
Fa0/1		connected	1	a-full	a-100	10/100BaseTX
Fa0/2		notconnect	1	auto	auto	10/100BaseTX
Fa0/3		notconnect	1	auto	auto	10/100BaseTX
Fa0/4		notconnect	1	auto	auto	10/100BaseTX
Fa0/5		notconnect	1	auto	auto	10/100BaseTX
Fa0/6		notconnect	1	auto	auto	10/100BaseTX
Fa0/7		notconnect	1	auto	auto	10/100BaseTX
Fa0/8		notconnect	1	auto	auto	10/100BaseTX
Fa0/9		notconnect	1	auto	auto	10/100BaseTX
Fa0/10		notconnect	1	auto	auto	10/100BaseTX
Fa0/11		notconnect	1	auto	auto	10/100BaseTX
Fa0/12		notconnect	1	auto	auto	10/100BaseTX
Fa0/13		notconnect	1	auto	auto	10/100BaseTX
Fa0/14		notconnect	1	auto	auto	10/100BaseTX
Fa0/15		notconnect	1	auto	auto	10/100BaseTX
Fa0/16		notconnect	1	auto	auto	10/100BaseTX
Fa0/17		notconnect	1	auto	auto	10/100BaseTX
Fa0/18		notconnect	1	auto	auto	10/100BaseTX
Fa0/19		notconnect	1	auto	auto	10/100BaseTX
Fa0/20		notconnect	1	auto	auto	10/100BaseTX
Fa0/21		notconnect	1	auto	auto	10/100BaseTX

SW-ENH-P2-1223#show cdp neighbors

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge

S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
DIST-ALUMNOS	Fas 0/24	141	S	2960	Fas 0/8

SW-ENH-P2-1223#

SW-ENH-P2-1224

Physical Config CLI Attributes

IOS Command Line Interface

User Access Verification

Password:

SW-ENH-P2-1224>en

Password:

SW-ENH-P2-1224#show interfaces status

Port	Name	Status	Vlan	Duplex	Speed	Type
Fa0/1		connected	1	a-full	a-100	10/100BaseTX
Fa0/2		notconnect	1	auto	auto	10/100BaseTX
Fa0/3		notconnect	1	auto	auto	10/100BaseTX
Fa0/4		notconnect	1	auto	auto	10/100BaseTX
Fa0/5		notconnect	1	auto	auto	10/100BaseTX
Fa0/6		notconnect	1	auto	auto	10/100BaseTX
Fa0/7		notconnect	1	auto	auto	10/100BaseTX
Fa0/8		notconnect	1	auto	auto	10/100BaseTX
Fa0/9		notconnect	1	auto	auto	10/100BaseTX
Fa0/10		notconnect	1	auto	auto	10/100BaseTX
Fa0/11		notconnect	1	auto	auto	10/100BaseTX
Fa0/12		notconnect	1	auto	auto	10/100BaseTX
Fa0/13		notconnect	1	auto	auto	10/100BaseTX
Fa0/14		notconnect	1	auto	auto	10/100BaseTX
Fa0/15		notconnect	1	auto	auto	10/100BaseTX
Fa0/16		notconnect	1	auto	auto	10/100BaseTX
Fa0/17		notconnect	1	auto	auto	10/100BaseTX
Fa0/18		notconnect	1	auto	auto	10/100BaseTX
Fa0/19		notconnect	1	auto	auto	10/100BaseTX
Fa0/20		notconnect	1	auto	auto	10/100BaseTX
Fa0/21		notconnect	1	auto	auto	10/100BaseTX

SW-ENH-P2-1224#show cdp neighbors

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge

S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
DIST-ALUMNOS	Fas 0/24	177	S	2960	Fas 0/9

SW-ENH-P2-1224#

SW-ENH-P2-FIN

Physical Config CLI Attributes

IOS Command Line Interface

User Access Verification

Password:

SW-ENH-P2-FIN>en

Password:

SW-ENH-P2-FIN#show interfaces status

Port	Name	Status	Vlan	Duplex	Speed	Type
Fa0/1		notconnect	1	auto	auto	10/100BaseTX
Fa0/2		notconnect	1	auto	auto	10/100BaseTX
Fa0/3		notconnect	1	auto	auto	10/100BaseTX
Fa0/4		notconnect	1	auto	auto	10/100BaseTX
Fa0/5		notconnect	1	auto	auto	10/100BaseTX
Fa0/6		notconnect	1	auto	auto	10/100BaseTX
Fa0/7		notconnect	1	auto	auto	10/100BaseTX
Fa0/8		notconnect	1	auto	auto	10/100BaseTX
Fa0/9		notconnect	1	auto	auto	10/100BaseTX
Fa0/10		notconnect	1	auto	auto	10/100BaseTX
Fa0/11		notconnect	1	auto	auto	10/100BaseTX
Fa0/12		notconnect	1	auto	auto	10/100BaseTX
Fa0/13		notconnect	1	auto	auto	10/100BaseTX
Fa0/14		notconnect	1	auto	auto	10/100BaseTX
Fa0/15		notconnect	1	auto	auto	10/100BaseTX
Fa0/16		notconnect	1	auto	auto	10/100BaseTX
Fa0/17		notconnect	1	auto	auto	10/100BaseTX
Fa0/18		notconnect	1	auto	auto	10/100BaseTX
Fa0/19		notconnect	1	auto	auto	10/100BaseTX
Fa0/20		connected	1	a-full	a-100	10/100BaseTX
Fa0/21		notconnect	1	auto	auto	10/100BaseTX

SW-ENH-P2-FIN#show cdp neighbors

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge

S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
DIST-ALUMNOS	Fas 0/24	154	S	2960	Fas 0/11

SW-ENH-P2-FIN#

Switches Jueces, Entrenadores y Prensa

Comandos: show vlan brief; show interfaces status; show cdp neighbors. Mostrar VLAN 10, 20 o 30 según el equipo y Fa0/24 conectado.

```

SW-ENH-P1-PRENSA
Physical Config CLI Attributes
IOS Command Line Interface

SW-ENH-P1-PRENSA#
SW-ENH-P1-PRENSA#show vlan brief

VLAN Name                Status    Ports
-----
1    default                active    Fa0/1, Fa0/2, Fa0/3, Fa0/4
30   prensa                  active    Fa0/5, Fa0/6, Fa0/7, Fa0/8
                                           Fa0/9, Fa0/10, Fa0/11, Fa0/12
                                           Fa0/13, Fa0/14, Fa0/15, Fa0/16
                                           Fa0/17, Fa0/18, Fa0/19, Fa0/20
                                           Fa0/21, Fa0/22, Fa0/23, Fa0/24
                                           Gig0/1, Gig0/2

1002 fddi-default          active
1003 token-ring-default    active
1004 fddinet-default        active
1005 trnet-default          active

SW-ENH-P1-PRENSA#show interfaces status

Port      Name                Status    Vlan    Duplex  Speed  Type
-----
Fa0/1      Fa0/1                connected 30      a-full  a-100  10/100BaseTX
Fa0/2      Fa0/2                connected 30      a-full  a-100  10/100BaseTX
Fa0/3      Fa0/3                notconnect 30      auto    auto    10/100BaseTX
Fa0/4      Fa0/4                notconnect 30      auto    auto    10/100BaseTX
Fa0/5      Fa0/5                notconnect 30      auto    auto    10/100BaseTX
Fa0/6      Fa0/6                notconnect 30      auto    auto    10/100BaseTX
Fa0/7      Fa0/7                notconnect 30      auto    auto    10/100BaseTX
Fa0/8      Fa0/8                notconnect 30      auto    auto    10/100BaseTX
Fa0/9      Fa0/9                notconnect 30      auto    auto    10/100BaseTX
Fa0/10     Fa0/10               notconnect 30      auto    auto    10/100BaseTX
Fa0/11     Fa0/11               notconnect 30      auto    auto    10/100BaseTX
Fa0/12     Fa0/12               notconnect 30      auto    auto    10/100BaseTX
Fa0/13     Fa0/13               notconnect 30      auto    auto    10/100BaseTX
Fa0/14     Fa0/14               notconnect 30      auto    auto    10/100BaseTX
Fa0/15     Fa0/15               notconnect 30      auto    auto    10/100BaseTX
Fa0/16     Fa0/16               notconnect 30      auto    auto    10/100BaseTX
Fa0/17     Fa0/17               notconnect 30      auto    auto    10/100BaseTX
Fa0/18     Fa0/18               notconnect 30      auto    auto    10/100BaseTX
Fa0/19     Fa0/19               notconnect 30      auto    auto    10/100BaseTX
Fa0/20     Fa0/20               notconnect 30      auto    auto    10/100BaseTX
Fa0/21     Fa0/21               notconnect 30      auto    auto    10/100BaseTX
Fa0/22     Fa0/22               notconnect 30      auto    auto    10/100BaseTX
Fa0/23     Fa0/23               notconnect 30      auto    auto    10/100BaseTX
Fa0/24     Fa0/24               connected 30      a-full  a-100  10/100BaseTX
Gig0/1     Gig0/1               notconnect 30      auto    auto    10/100/1000BaseTX
Gig0/2     Gig0/2               notconnect 30      auto    auto    10/100/1000BaseTX

SW-ENH-P1-PRENSA#show cdp neighbors
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone
Device ID    Local Intrfce    Holdtme    Capability    Platform    Port ID
SWDistributionExternos
Fa0/24      172              S          2960          Fa0/1

```

```

SW-CIT-P1-ENTRENADORES
Physical Config CLI Attributes
IOS Command Line Interface

SW-CIT-P1-ENTRENADORES#show vlan brief
VLAN Name                Status Ports
-----
1    default              active Fa0/1, Fa0/2, Fa0/3, Fa0/4
20   VLAN0020             active Fa0/5, Fa0/6, Fa0/7, Fa0/8
                                   Fa0/9, Fa0/10, Fa0/11, Fa0/12
                                   Fa0/13, Fa0/14, Fa0/15, Fa0/16
                                   Fa0/17, Fa0/18, Fa0/19, Fa0/20
                                   Fa0/21, Fa0/22, Fa0/23, Fa0/24
                                   Gig0/1, Gig0/2

1002 fddi-default         active
1003 token-ring-default   active
1004 fddinet-default      active
1005 trnet-default        active

SW-CIT-P1-ENTRENADORES#show interfaces status
Port      Name      Status Vlan Duplex Speed Type
-----
Fa0/1     connected 20     a-full a-100 10/100BaseTX
Fa0/2     connected 20     a-full a-100 10/100BaseTX
Fa0/3     notconnect 20     auto   auto  10/100BaseTX
Fa0/4     notconnect 20     auto   auto  10/100BaseTX
Fa0/5     notconnect 20     auto   auto  10/100BaseTX
Fa0/6     notconnect 20     auto   auto  10/100BaseTX
Fa0/7     notconnect 20     auto   auto  10/100BaseTX
Fa0/8     notconnect 20     auto   auto  10/100BaseTX
Fa0/9     notconnect 20     auto   auto  10/100BaseTX
Fa0/10    notconnect 20     auto   auto  10/100BaseTX
Fa0/11    notconnect 20     auto   auto  10/100BaseTX
Fa0/12    notconnect 20     auto   auto  10/100BaseTX
Fa0/13    notconnect 20     auto   auto  10/100BaseTX
Fa0/14    notconnect 20     auto   auto  10/100BaseTX
Fa0/15    notconnect 20     auto   auto  10/100BaseTX
Fa0/16    notconnect 20     auto   auto  10/100BaseTX
Fa0/17    notconnect 20     auto   auto  10/100BaseTX
Fa0/18    notconnect 20     auto   auto  10/100BaseTX
Fa0/19    notconnect 20     auto   auto  10/100BaseTX
Fa0/20    notconnect 20     auto   auto  10/100BaseTX
Fa0/21    notconnect 20     auto   auto  10/100BaseTX
Fa0/22    notconnect 20     auto   auto  10/100BaseTX
Fa0/23    notconnect 20     auto   auto  10/100BaseTX
Fa0/24    connected 20     a-full a-100 10/100BaseTX
Gig0/1    notconnect 20     auto   auto  10/100/1000BaseTX
Gig0/2    notconnect 20     auto   auto  10/100/1000BaseTX

SW-CIT-P1-ENTRENADORES#show cdp neighbors
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone
Device ID Local Intrfce Holdtme Capability Platform Port ID
SWDistribucionExternos
Fas 0/24 166 S 2960 Fas 0/10

SW-CIT-P1-ENTRENADORES#

```

```

SW-EIC-P1-JUECES
Physical Config CLI Attributes
IOS Command Line Interface

Password:
SW-EIC-P1-JUECES#show vlan brief
VLAN Name                Status Ports
-----
1    default              active Fa0/1, Fa0/2, Fa0/3, Fa0/4
10   VLAN0010             active Fa0/5, Fa0/6, Fa0/7, Fa0/8
                                   Fa0/9, Fa0/10, Fa0/11, Fa0/12
                                   Fa0/13, Fa0/14, Fa0/15, Fa0/16
                                   Fa0/17, Fa0/18, Fa0/19, Fa0/20
                                   Fa0/21, Fa0/22, Fa0/23, Fa0/24
                                   Gig0/1, Gig0/2

1002 fddi-default         active
1003 token-ring-default   active
1004 fddinet-default      active
1005 trnet-default        active

SW-EIC-P1-JUECES#show interfaces status
Port      Name      Status Vlan Duplex Speed Type
-----
Fa0/1     connected 10     a-full a-100 10/100BaseTX
Fa0/2     connected 10     a-full a-100 10/100BaseTX
Fa0/3     notconnect 10     auto   auto  10/100BaseTX
Fa0/4     notconnect 10     auto   auto  10/100BaseTX
Fa0/5     notconnect 10     auto   auto  10/100BaseTX
Fa0/6     notconnect 10     auto   auto  10/100BaseTX
Fa0/7     notconnect 10     auto   auto  10/100BaseTX
Fa0/8     notconnect 10     auto   auto  10/100BaseTX
Fa0/9     notconnect 10     auto   auto  10/100BaseTX
Fa0/10    notconnect 10     auto   auto  10/100BaseTX
Fa0/11    notconnect 10     auto   auto  10/100BaseTX
Fa0/12    notconnect 10     auto   auto  10/100BaseTX
Fa0/13    notconnect 10     auto   auto  10/100BaseTX
Fa0/14    notconnect 10     auto   auto  10/100BaseTX
Fa0/15    notconnect 10     auto   auto  10/100BaseTX
Fa0/16    notconnect 10     auto   auto  10/100BaseTX
Fa0/17    notconnect 10     auto   auto  10/100BaseTX
Fa0/18    notconnect 10     auto   auto  10/100BaseTX
Fa0/19    notconnect 10     auto   auto  10/100BaseTX
Fa0/20    IMPRESORAS-JUECES connected 10     a-full a-100 10/100BaseTX
Fa0/21    IMPRESORAS-JUECES connected 10     a-full a-100 10/100BaseTX
Fa0/22    IMPRESORAS-JUECES connected 10     a-full a-100 10/100BaseTX
Fa0/23    notconnect 10     auto   auto  10/100BaseTX
Fa0/24    connected 10     a-full a-100 10/100BaseTX
Gig0/1    notconnect 10     auto   auto  10/100/1000BaseTX
Gig0/2    notconnect 10     auto   auto  10/100/1000BaseTX

SW-EIC-P1-JUECES#show cdp neighbors
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
                  S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone
Device ID Local Intrfce Holdtme Capability Platform Port ID
SWDistribucionExternos
Fas 0/24 120 S 2960 Fas 0/15

SW-EIC-P1-JUECES#

```