


LVT SERIES 5

PRODUCT SPECIFICATIONS

Style Name LVT SERIES 5 - SOFT OAK

Overall Guage 3.0mm
Wear Layer 0.5mm
Surface Treatment PUR®

Tile Size 6" X 48" (WOOD) / 12" X 24" (STONE)

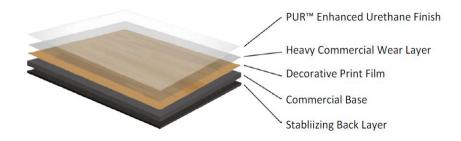

PERFORMANCE SPECIFICATIONS

Fire Resistance EN13501-1 Bfl-S1

Dimension stability EN434 <0.25%

Curling after exposure to heat EN434 <1.2mm

Colour Fastness to Light ISO105B02 grade>6

Abrasion resistance EN660 Class T

Slip resistance EN13893 Class DS

Wear Classification Commercial Grade Resilient Tile


Sustainability Floorscore® Certified

Treatment Anti-Bacterial with PUR™

Warranty 10 Years Commercial Limited Warranty



RECOMMENDED INSTALLATION METHOD





Ashlar Herringbone

Basketweave



