Finite material-distance gates: keep every planned attempt

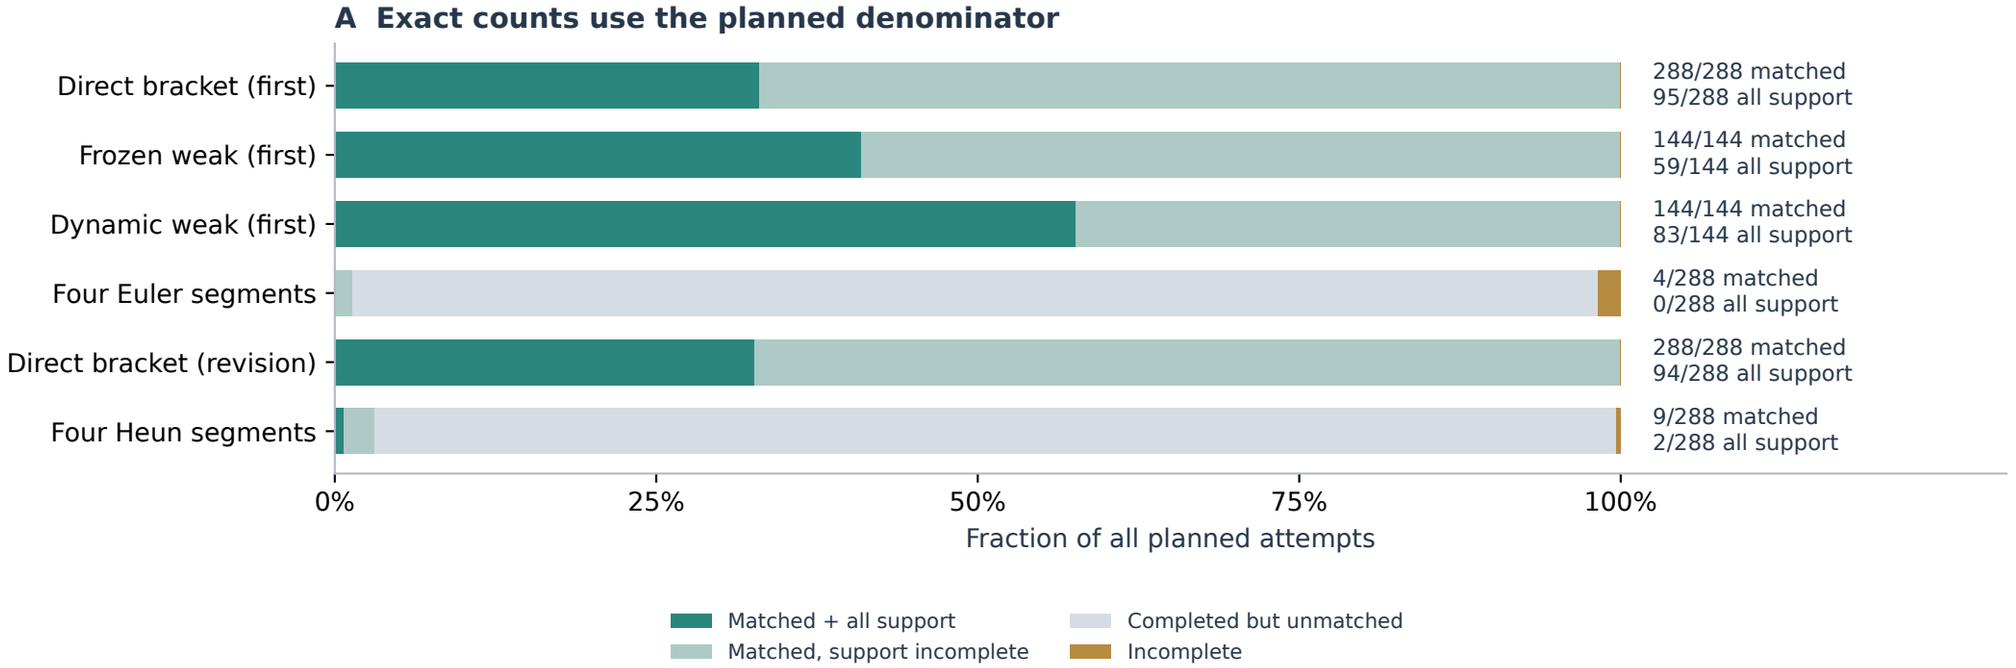

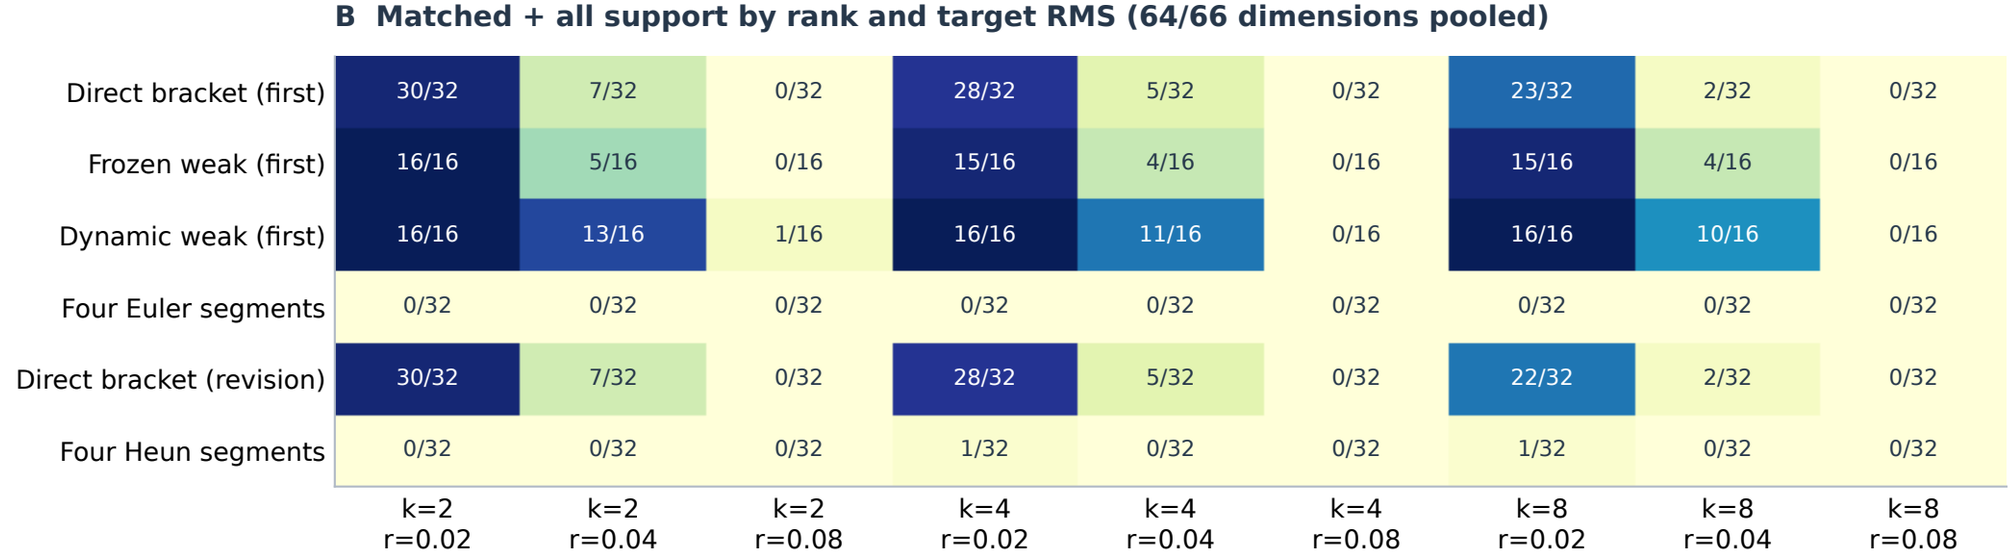

8 exposed DEV parents; repeated settings and orientations are attempts, not independent worlds. Distance gate: |actual RMS / target − 1| ≤ .02.

Support = original noise ball, ΔPhi ≤ 2, prior Δ ≤ 2, signed progress ≥ .5r, prior legality and residual check. Sampled paths give no continuous certificate.