Phase II: common noise-aware GN inputs | Implemented architecture: conditional prior + bounded SPD current metric
DEVELOPMENT VAL used for checkpoint/model selection
Image/mother absent TRAIN; classes/fonts may be seen. No fresh TEST.

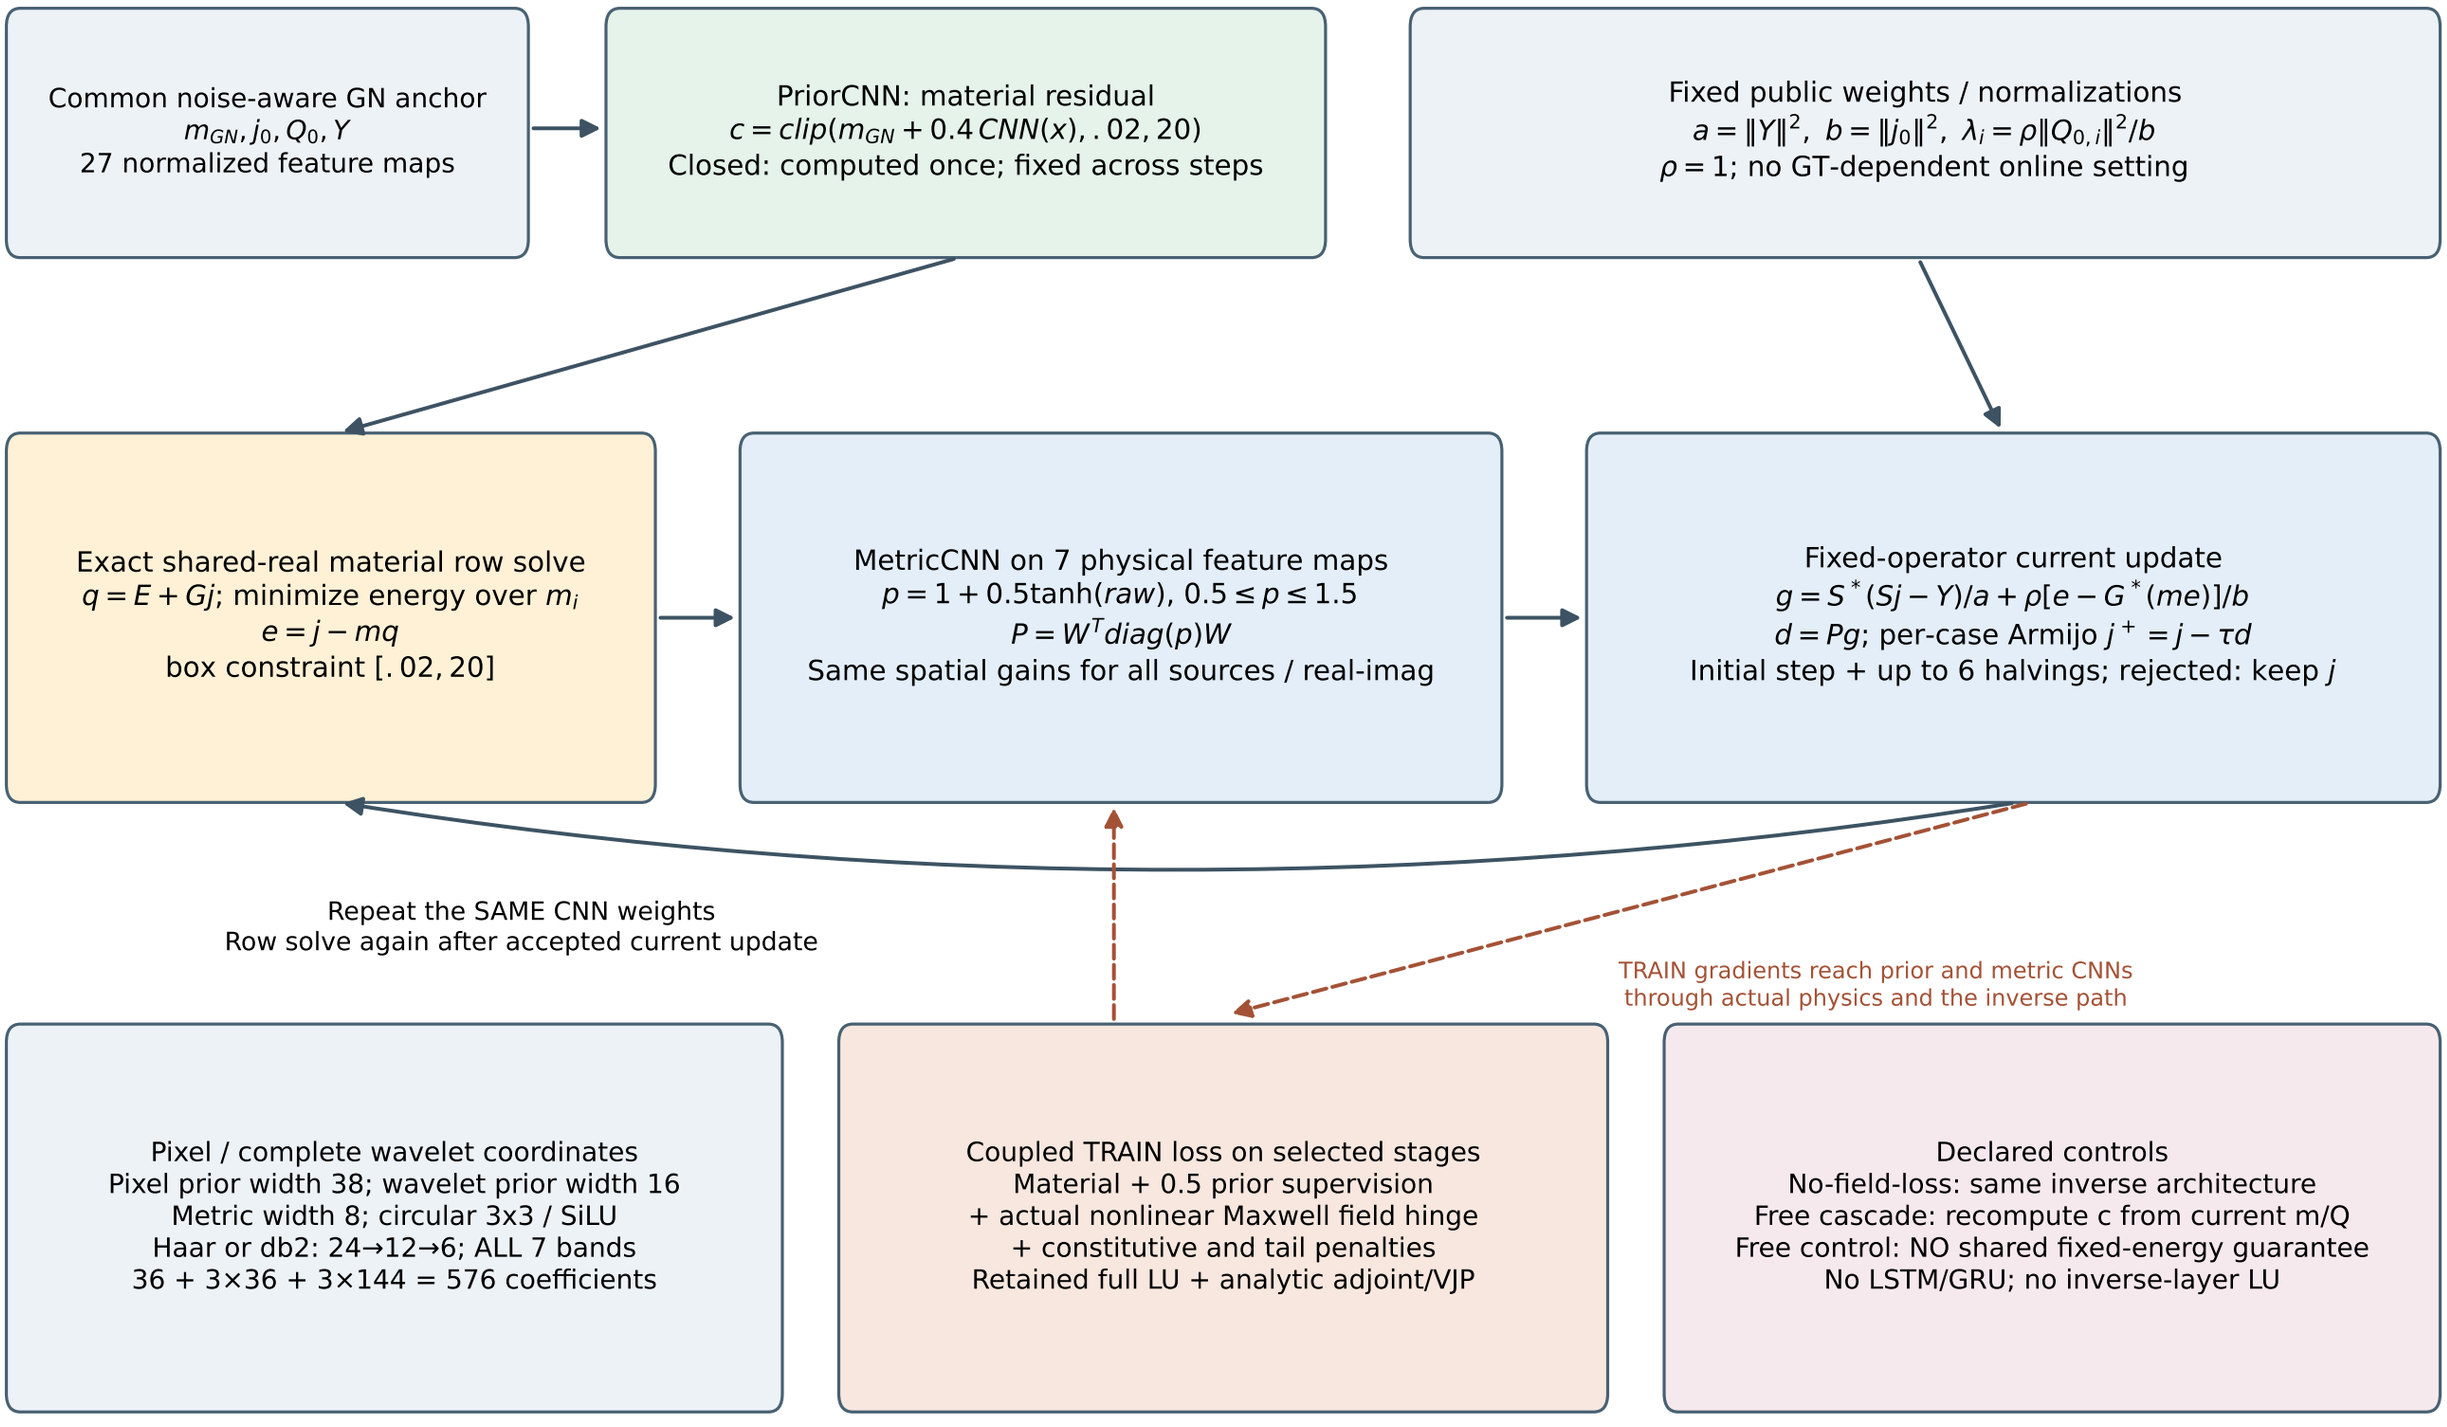

Actual class parameter counts: pixel: 23,818; haar: 23,910; db2: 23,910
Closed fixed-energy descent is conditional; no global convergence or GT-recovery guarantee.