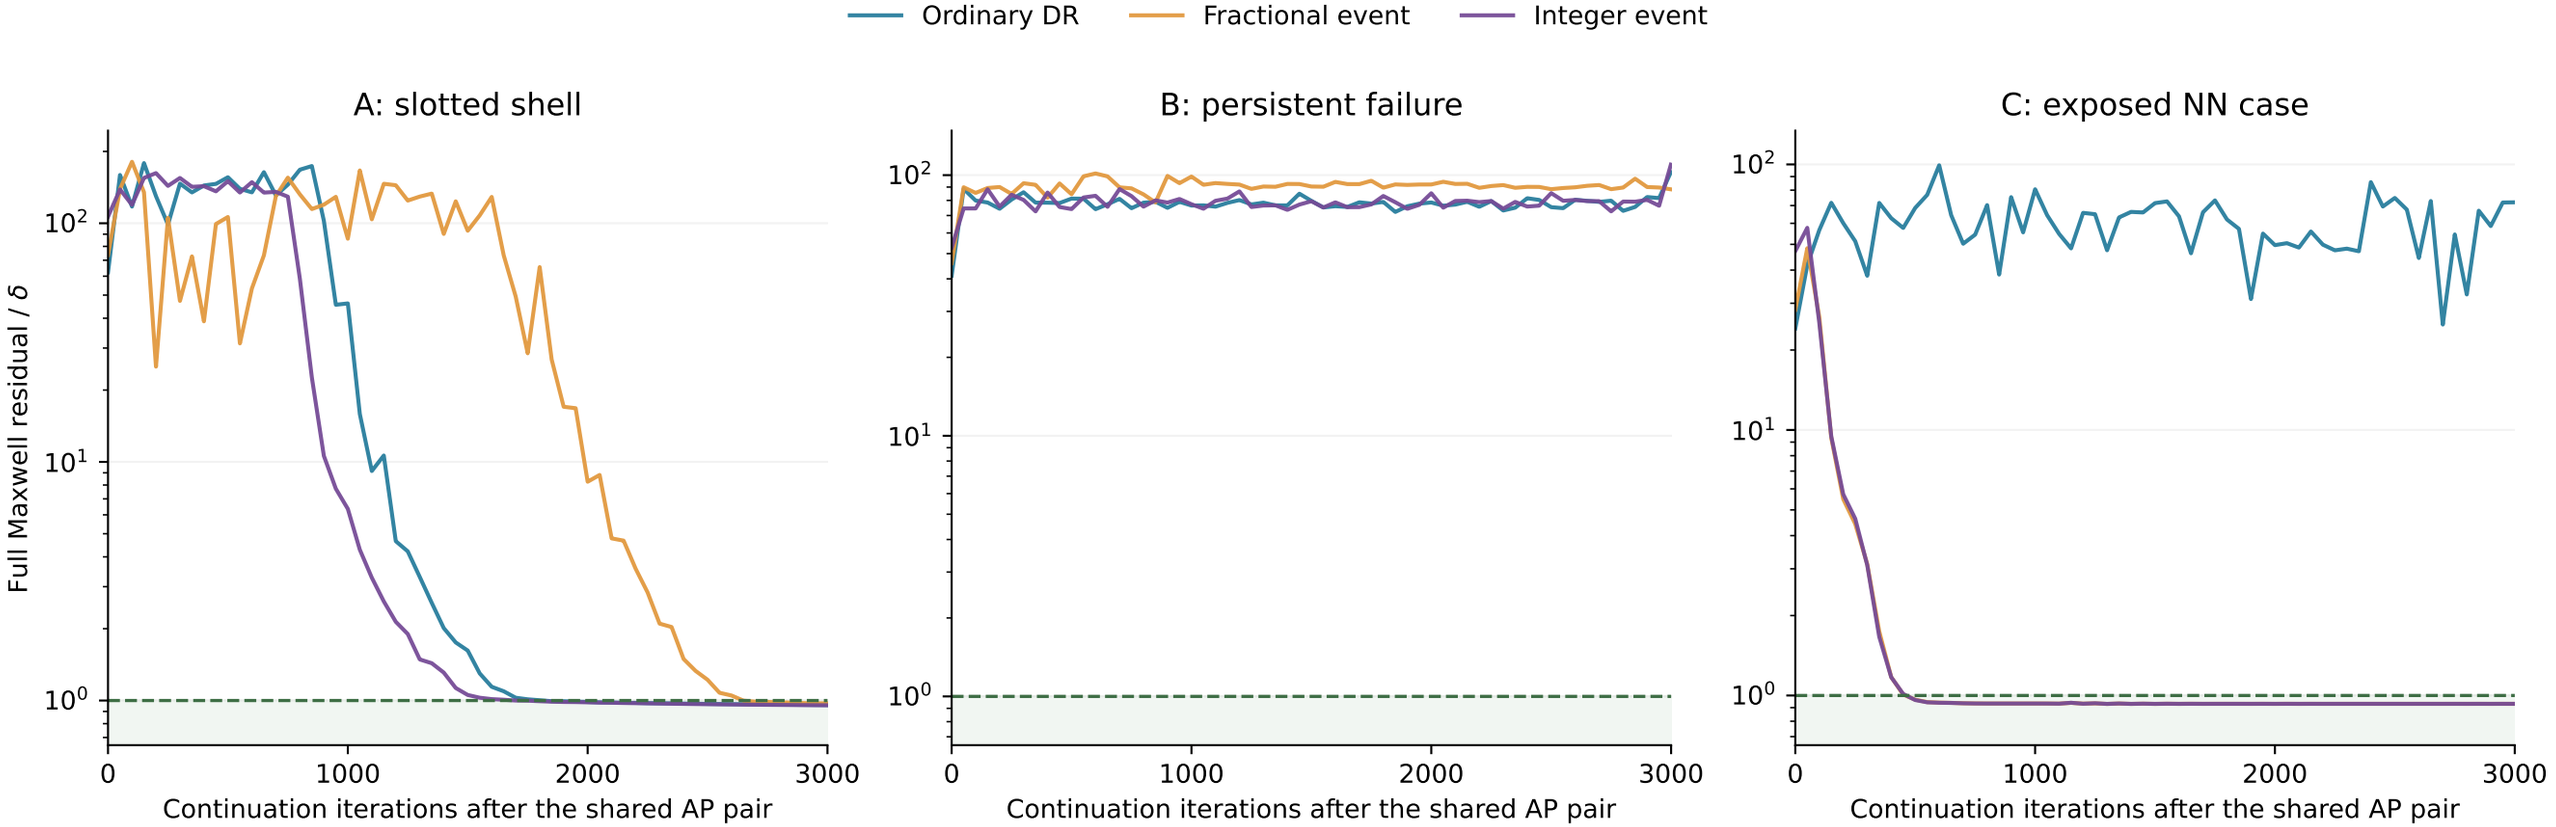

Every curve uses full physical audits every 50 steps; the dashed line is the noise radius. All branches have 3000 steps, but actual CPU differs.
The shared 3000-step AP preparation and exploratory probes are additional work. No physical corrector is applied.