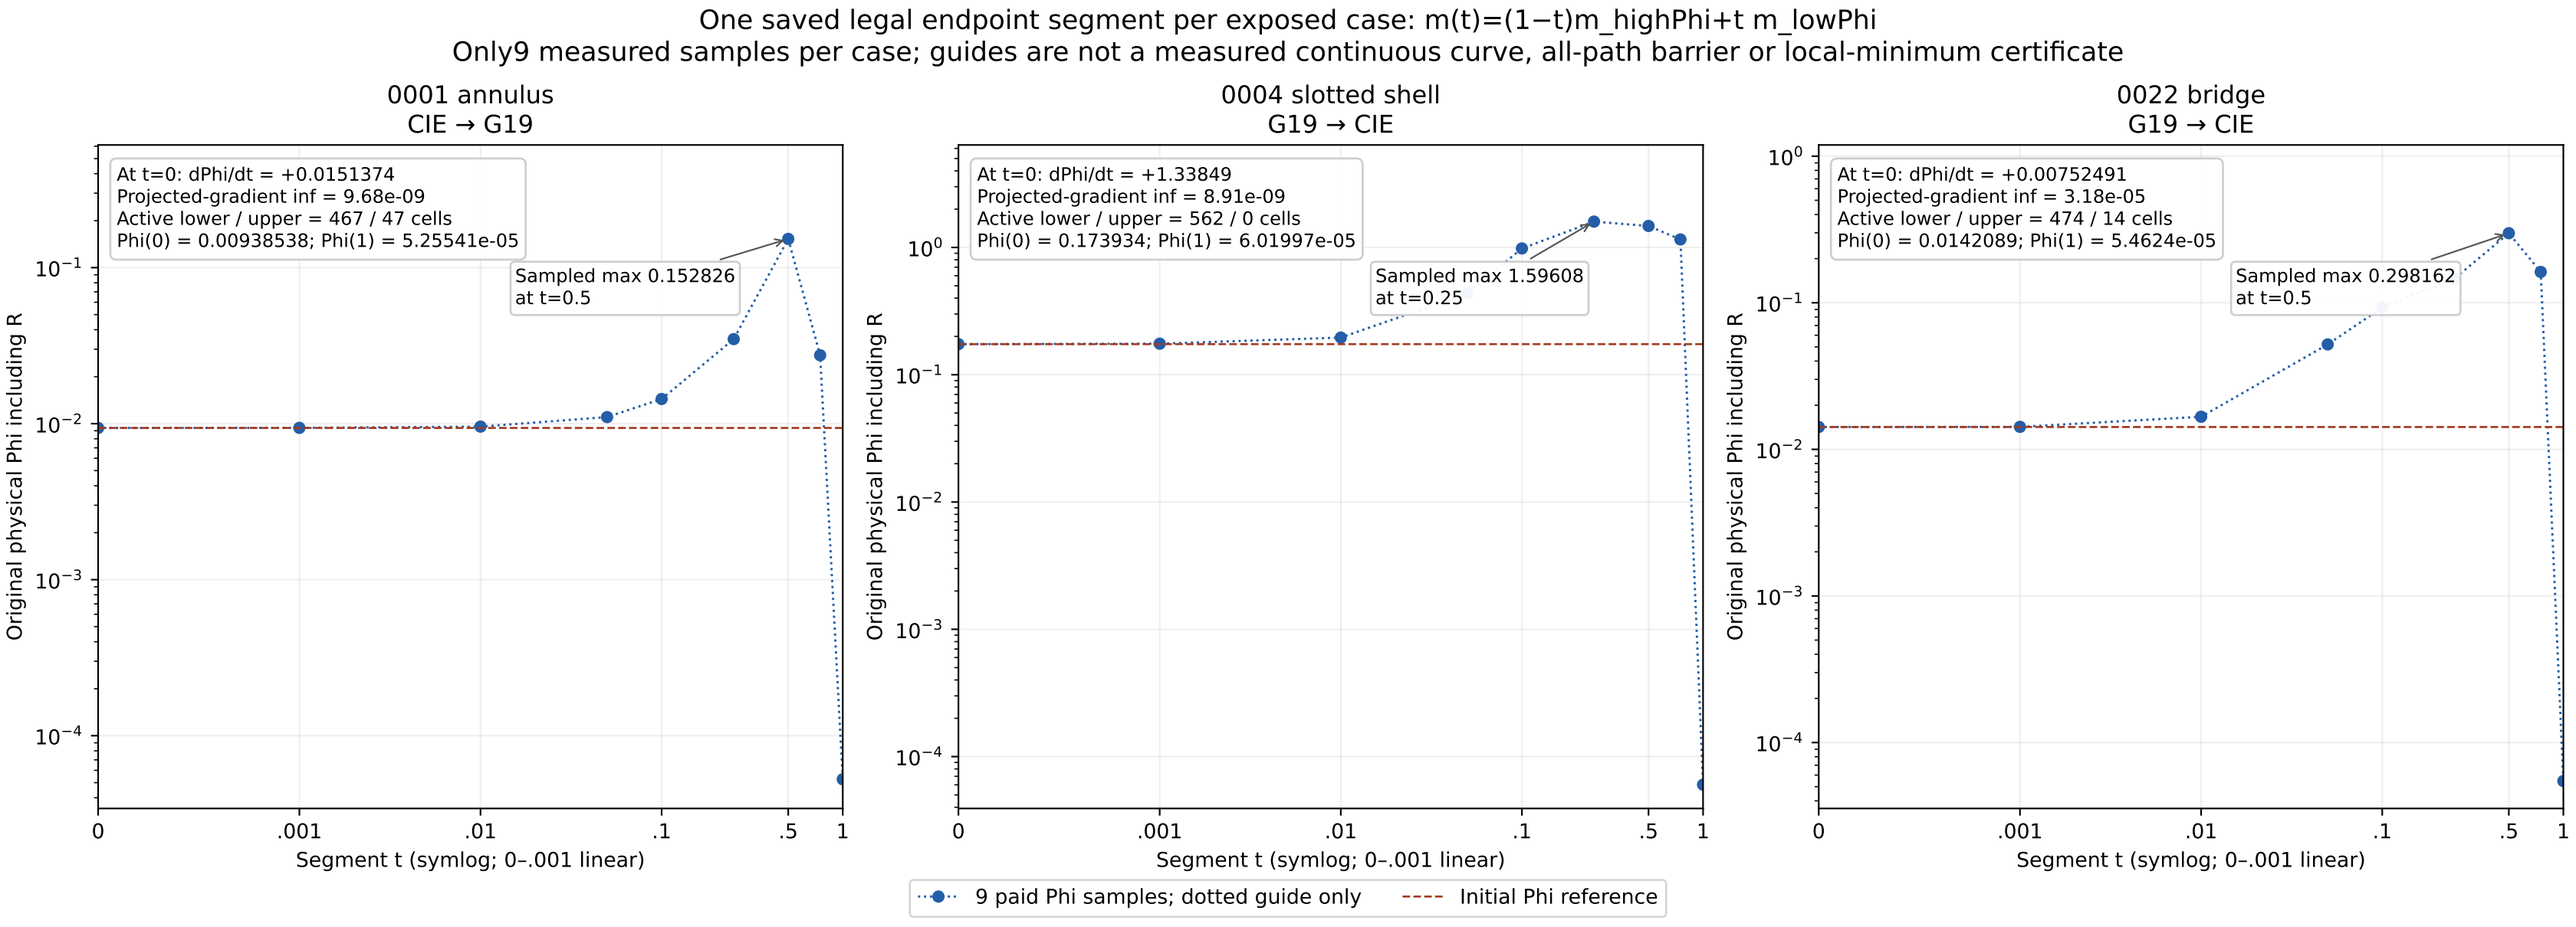
One saved legal endpoint segment per exposed case: m(t)=(1−t)m_highPhi+t m_lowPhi
Only9 measured samples per case; guides are not a measured continuous curve, all-path barrier or local-minimum certificate
0001 annulus
CIE → G19
At t=0: dPhi/dt = +0.0151374
Projected-gradient inf = 9.68e-09
Active lower / upper = 467 / 47 cells
Phi(0) = 0.00938538; Phi(1) = 5.25541e-05
Sampled max 0.152826
at t=0.5
0004 slotted shell
G19 → CIE
At t=0: dPhi/dt = +1.33849
Projected-gradient inf = 8.91e-09
Active lower / upper = 562 / 0 cells
Phi(0) = 0.173934; Phi(1) = 6.01997e-05
Sampled max 1.59608
at t=0.25
0022 bridge
G19 → CIE
At t=0: dPhi/dt = +0.00752491
Projected-gradient inf = 3.18e-05
Active lower / upper = 474 / 14 cells
Phi(0) = 0.0142089; Phi(1) = 5.4624e-05
Sampled max 0.298162
at t=0.5
Original physical Phi including R
Segment t (symlog; 0–.001 linear)
0
.001
.01
.1
.5
1
9 paid Phi samples; dotted guide only
Initial Phi reference