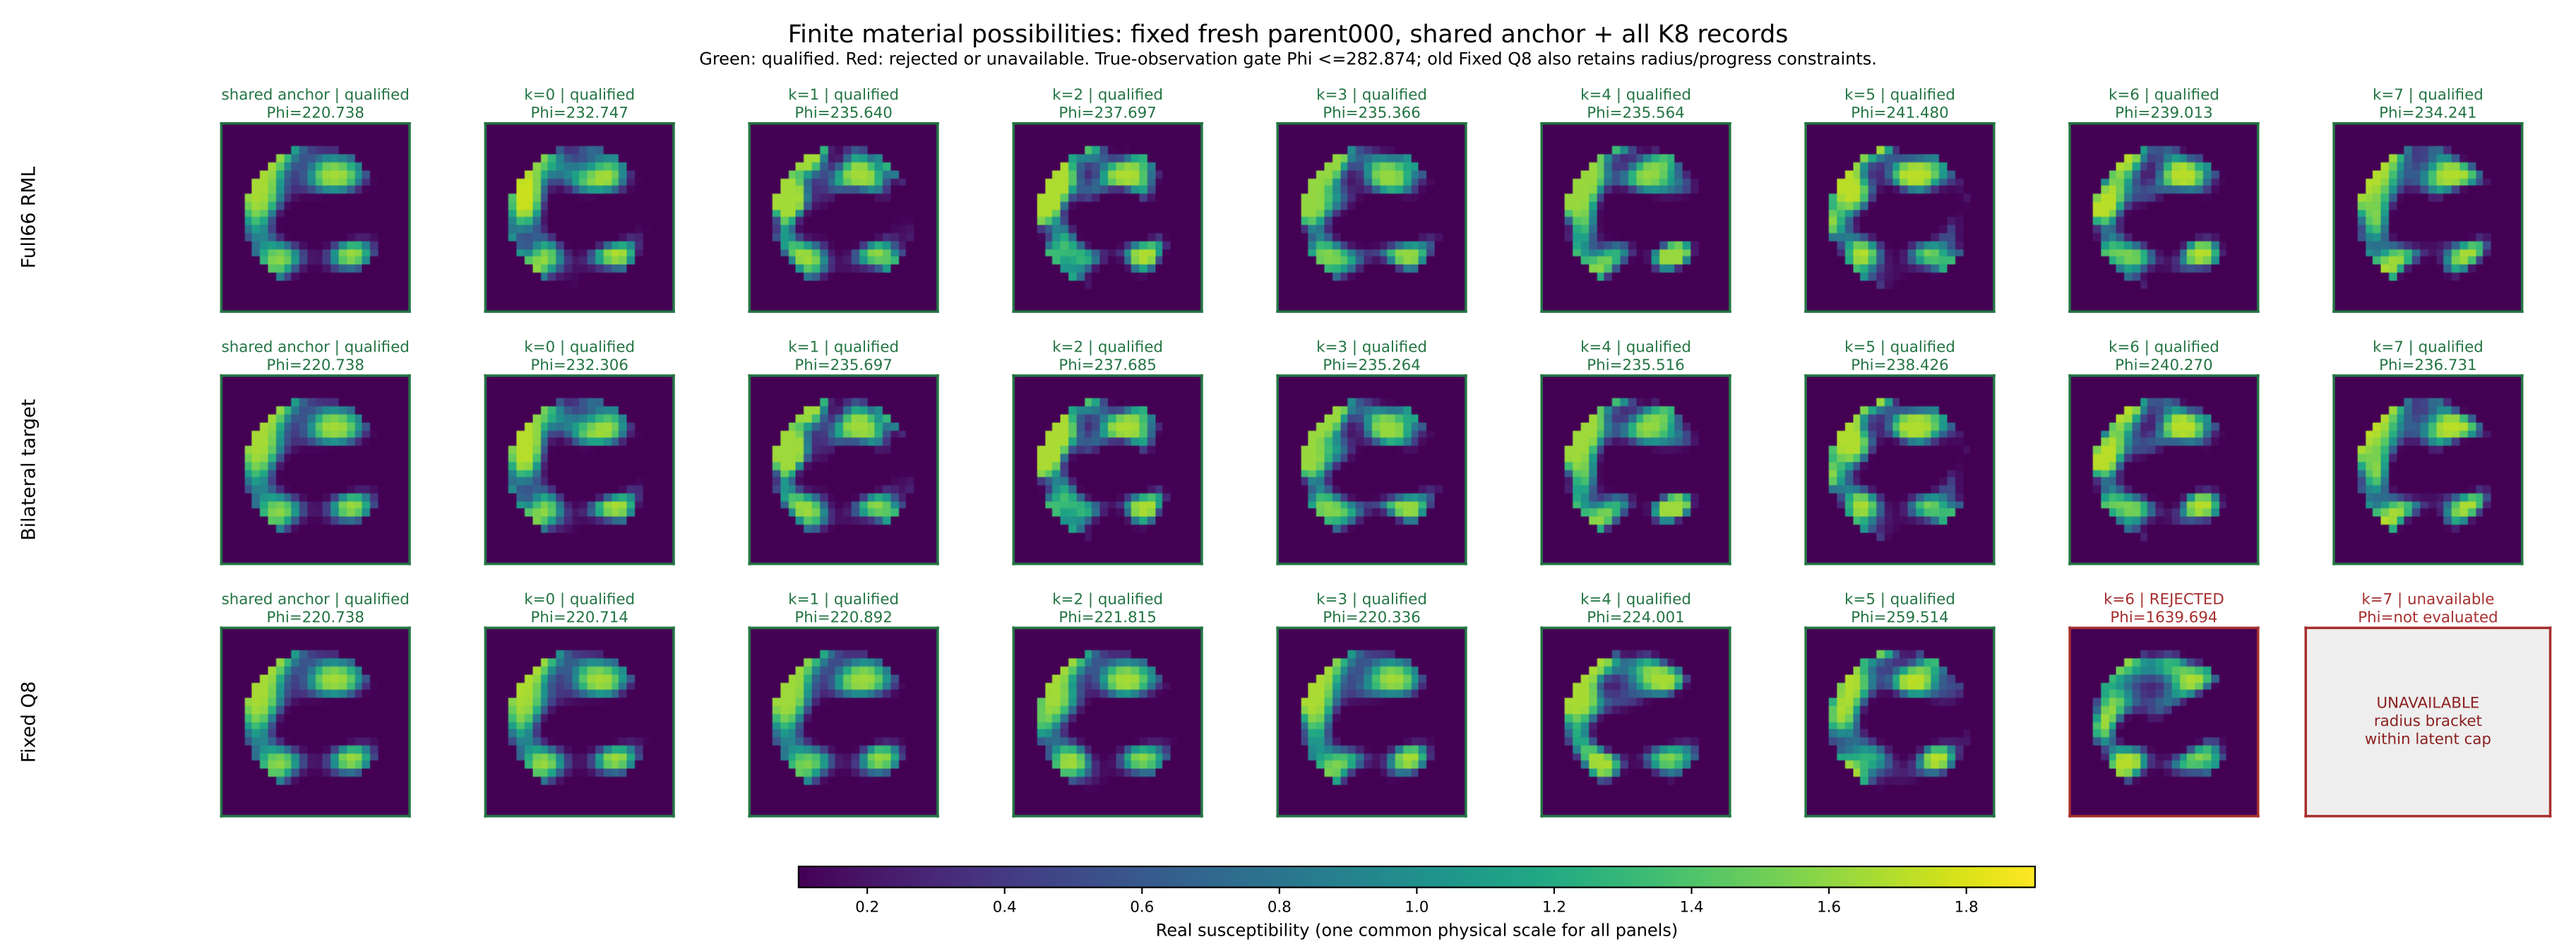

Finite material possibilities: fixed fresh parent000, shared anchor + all K8 records
Green: qualified. Red: rejected or unavailable. True-observation gate Phi <=282.874; old Fixed Q8 also retains radius/progress constraints.
Full66 RML
Bilateral target
Fixed Q8
shared anchor | qualified
Phi=220.738
k=0 | qualified
Phi=232.747
k=1 | qualified
Phi=235.640
k=2 | qualified
Phi=237.697
k=3 | qualified
Phi=235.366
k=4 | qualified
Phi=235.564
k=5 | qualified
Phi=241.480
k=6 | qualified
Phi=239.013
k=7 | qualified
Phi=234.241
shared anchor | qualified
Phi=220.738
k=0 | qualified
Phi=232.306
k=1 | qualified
Phi=235.697
k=2 | qualified
Phi=237.685
k=3 | qualified
Phi=235.264
k=4 | qualified
Phi=235.516
k=5 | qualified
Phi=238.426
k=6 | qualified
Phi=240.270
k=7 | qualified
Phi=236.731
shared anchor | qualified
Phi=220.738
k=0 | qualified
Phi=220.714
k=1 | qualified
Phi=220.892
k=2 | qualified
Phi=221.815
k=3 | qualified
Phi=220.336
k=4 | qualified
Phi=224.001
k=5 | qualified
Phi=259.514
k=6 | REJECTED
Phi=1639.694
k=7 | unavailable
Phi=not evaluated
UNAVAILABLE
radius bracket
within latent cap
0.2
0.4
0.6
0.8
1.0
1.2
1.4
1.6
1.8
Real susceptibility (one common physical scale for all panels)