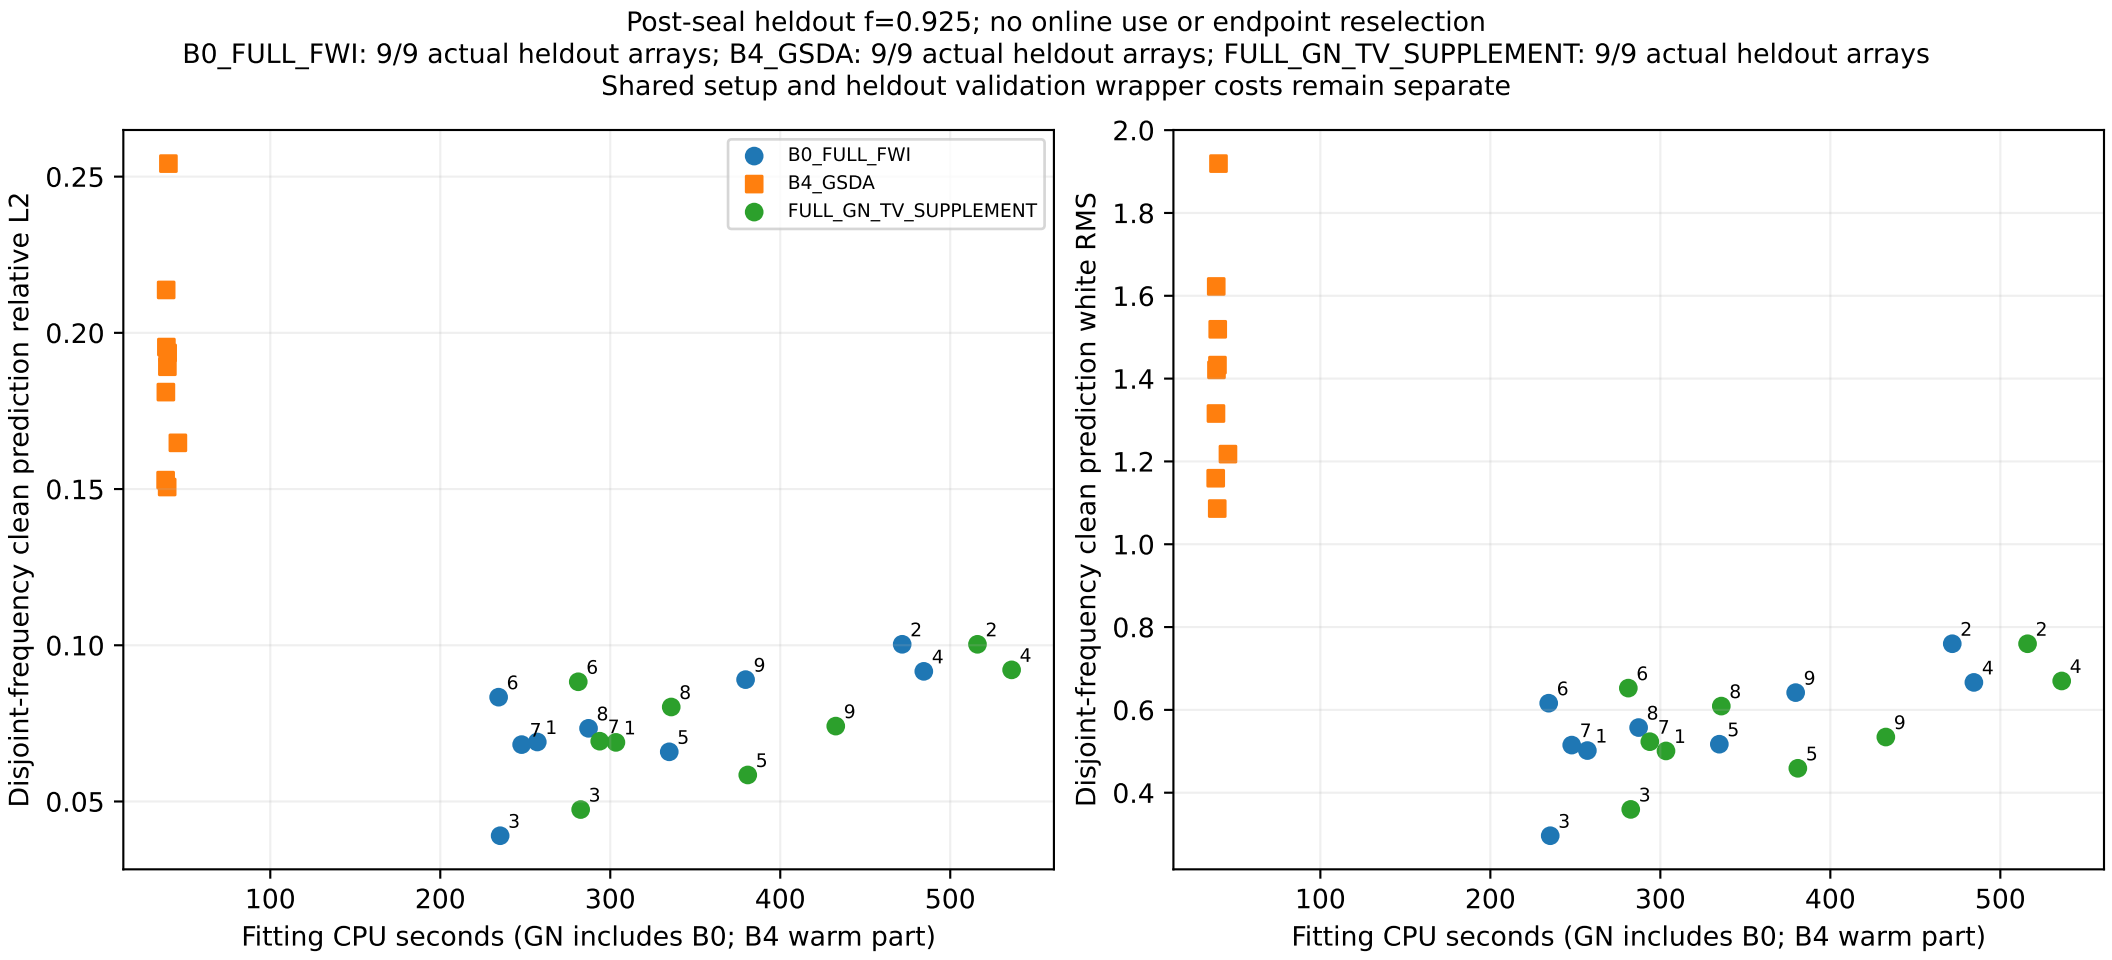
Post-seal heldout f=0.925; no online use or endpoint reselection
B0_FULL_FWI: 9/9 actual heldout arrays; B4_GSDA: 9/9 actual heldout arrays; FULL_GN_TV_SUPPLEMENT: 9/9 actual heldout arrays
Shared setup and heldout validation wrapper costs remain separate
B0_FULL_FWI
B4_GSDA
FULL_GN_TV_SUPPLEMENT
Disjoint-frequency clean prediction relative L2
Disjoint-frequency clean prediction white RMS
Fitting CPU seconds (GN includes B0; B4 warm part)
Fitting CPU seconds (GN includes B0; B4 warm part)