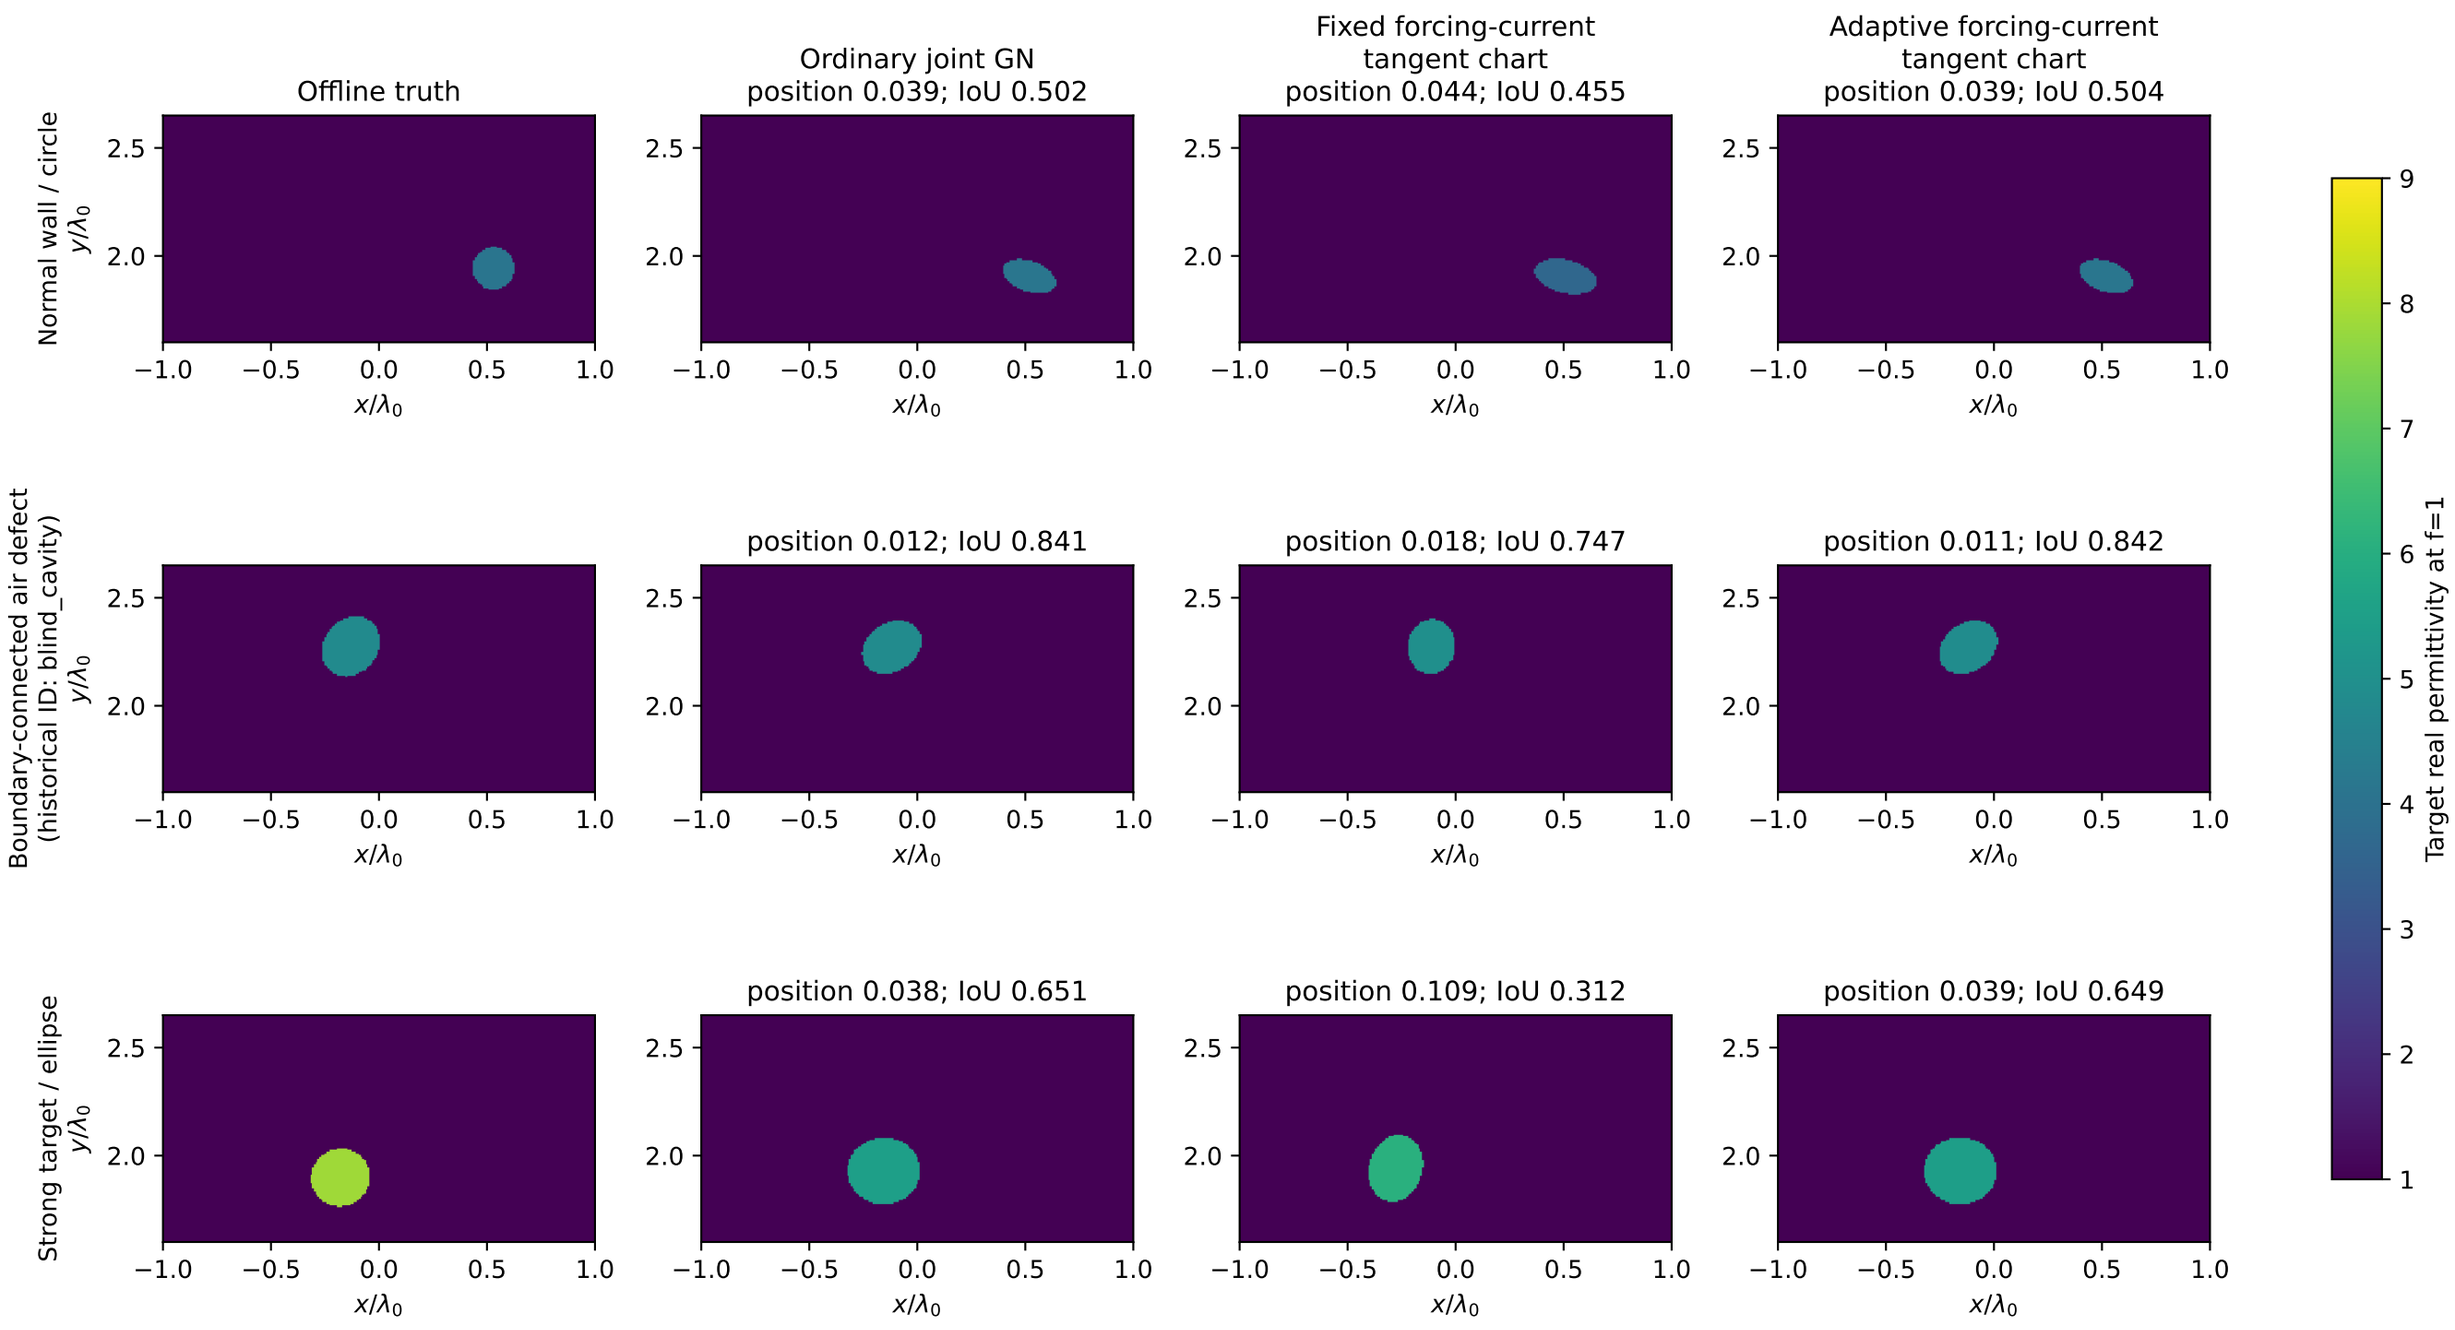
Three frozen independent blind worlds, noise repeat 0
Full nonlinear Maxwell F in every arm; forcing-current charts approximate material tangent J
Endpoints selected by full measurement objective before offline truth scoring
Offline truth
Ordinary joint GN
position 0.039; IoU 0.502
Fixed forcing-current
tangent chart
position 0.044; IoU 0.455
Adaptive forcing-current
tangent chart
position 0.039; IoU 0.504
Normal wall / circle
Boundary-connected air defect
(historical ID: blind_cavity)
position 0.012; IoU 0.841
position 0.018; IoU 0.747
position 0.011; IoU 0.842
Strong target / ellipse
position 0.038; IoU 0.651
position 0.109; IoU 0.312
position 0.039; IoU 0.649
y/λ_0
x/λ_0
Target real permittivity at f=1