


iter16b: 16 KB 4-way non-blocking cache, SKY130 HD, 16 OpenRAM macros, 250 MHz
GDSII layout (Cache_16384B_assoc4_sram.gds) viewed in KLayout 0.30.7

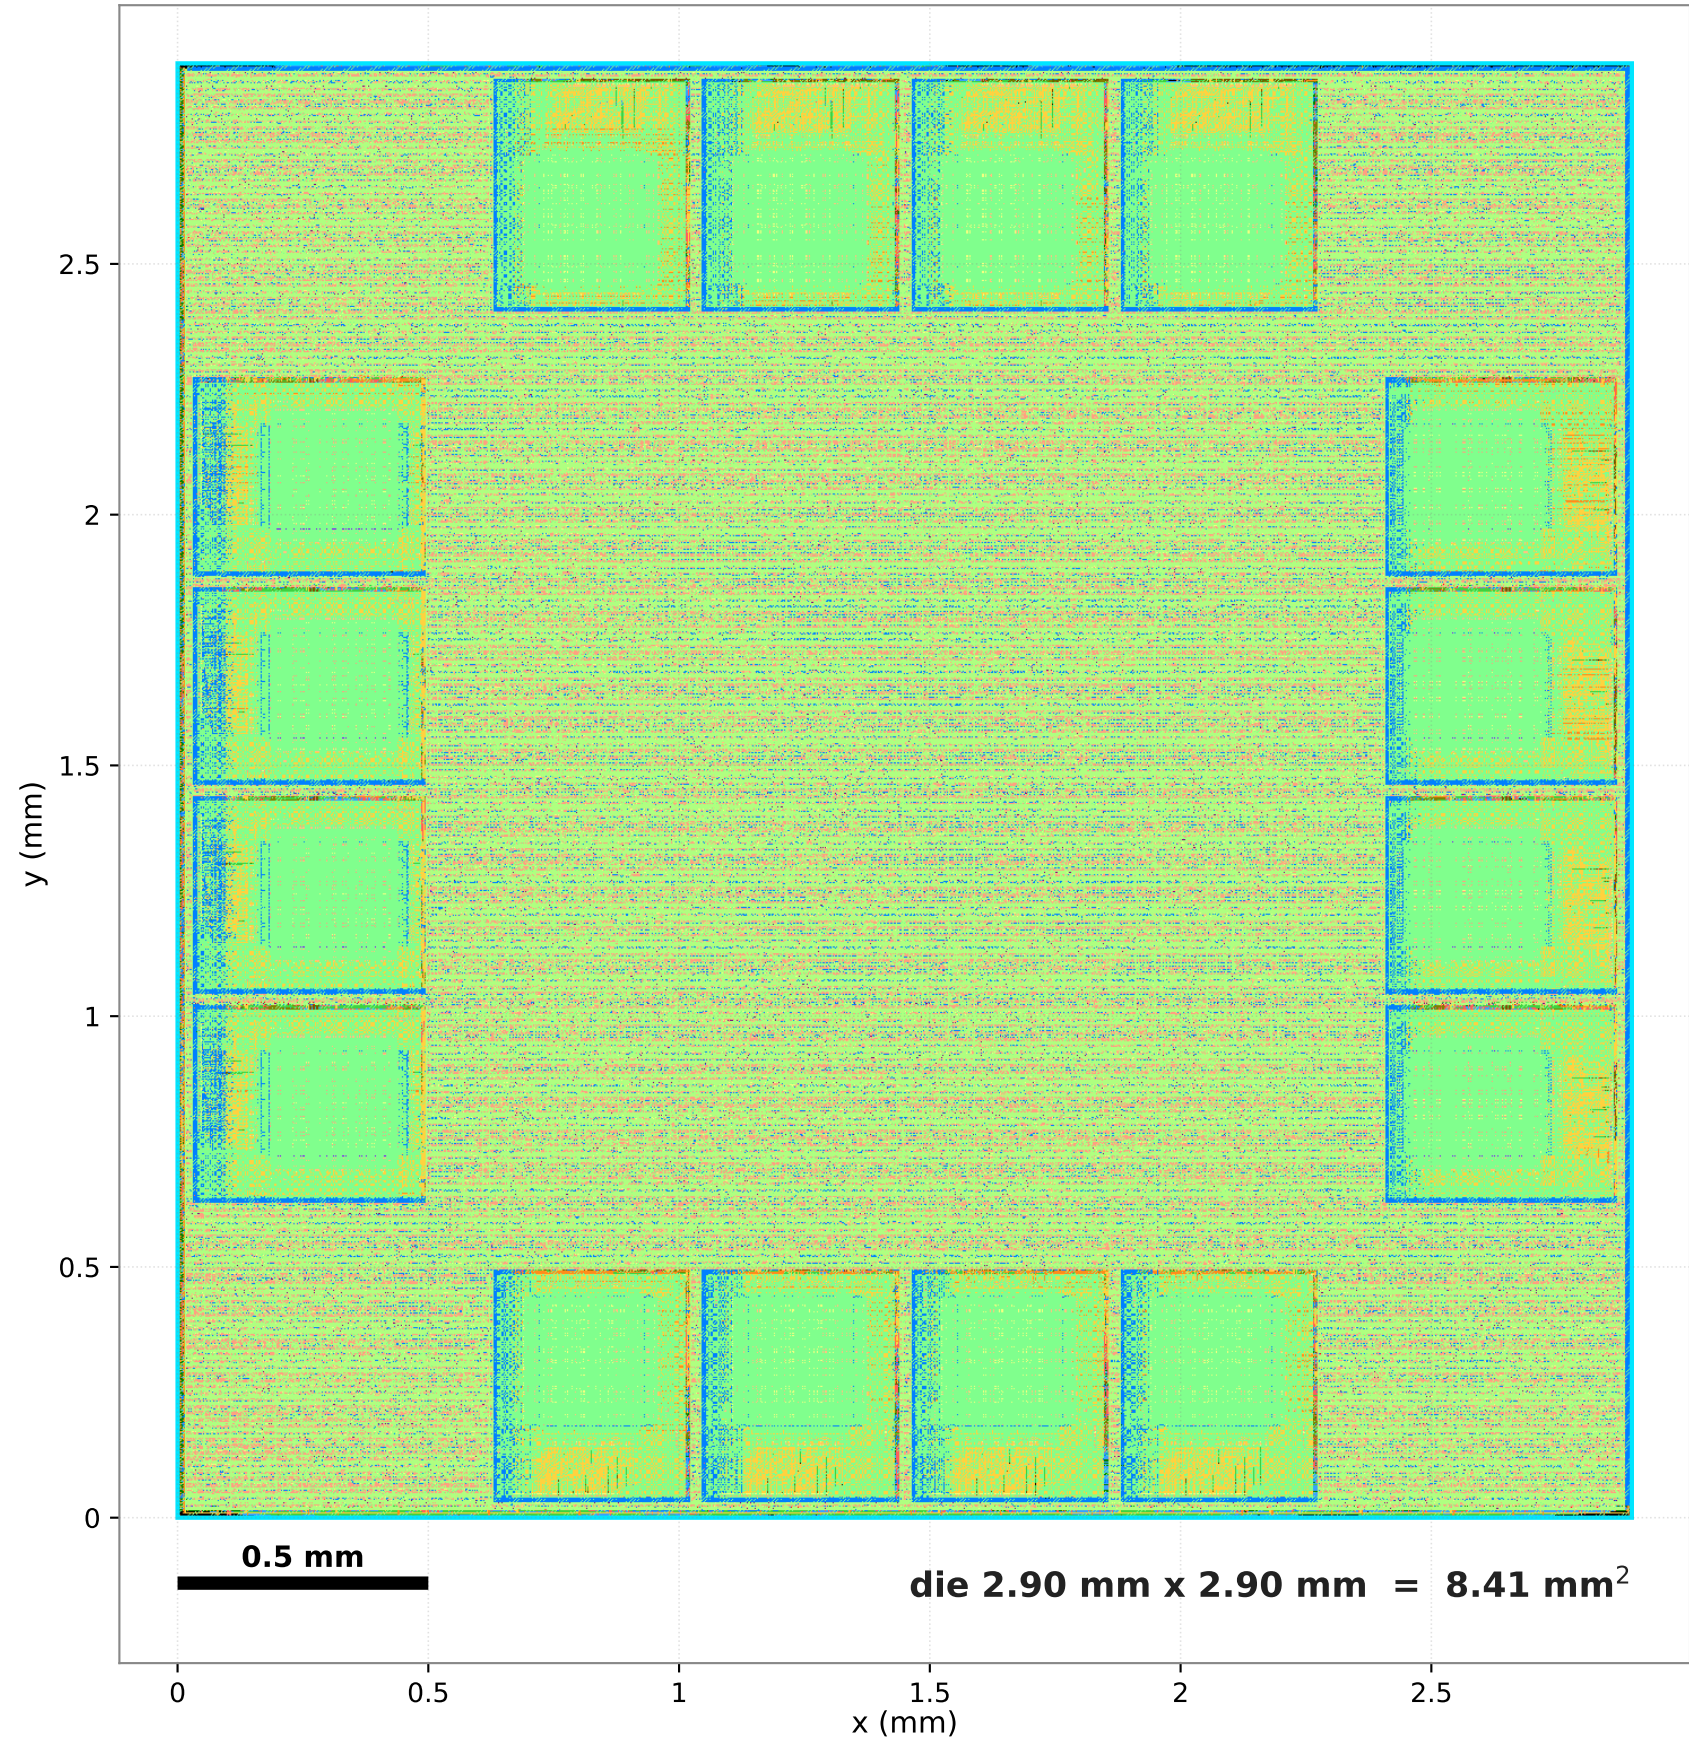

SIGNOFF SHEET

design/violation numbers from Cadence Innovus 21.16 reports;
timing from Cadence Tempus 23.14 (SI, Quantus RC) - see SIGNOFF

DESIGN

Die size	2.90 x 2.90 mm (8.41 mm2)
Process	SKY130 HD std cells
Std cells	250,912 logic
	+160,761 decap/tap/diode/tie
SRAM macros	16 x 32x256 (16 KB cache, 4-way)
Clock target	4.000 ns (250 MHz)

VIOLATIONS

Route DRC markers	0
Antenna violations	0

TOTAL violations	0

SIGNOFF (Tempus, SI, both corners)

Clock 4.000 ns (250 MHz), propagated, OCV
Corners ss_n40C_1v76 / ss_100C_1v60, macros x1.5

	n40C_1v76	100C_1v60
reg2reg WNS	+1.593	+1.022 ns
reg2out WNS	+0.917	+0.499 ns
all setup WNS	+0.499	+0.076 ns
hold WNS	+0.010	+0.010 ns
violating paths	0	0

Route DRC 0 / antenna 0 (Innovus)
KLayout BEOL DRC: clean outside macros
LVS (magic+netgen): in progress
Static IR (Voltus): 119 mV worst VDD