

NetScope X1 lower board (keys, status LEDs, buzzer, USB-C), rev A. UNTESTED: not built, not measured.


USB-C: charging input and USB 2.0. D30 pin 5 is left open on purpose: the data lines are still clamped by the part's internal diode, and VBUS may then be raised above 5 V later without touching D30.

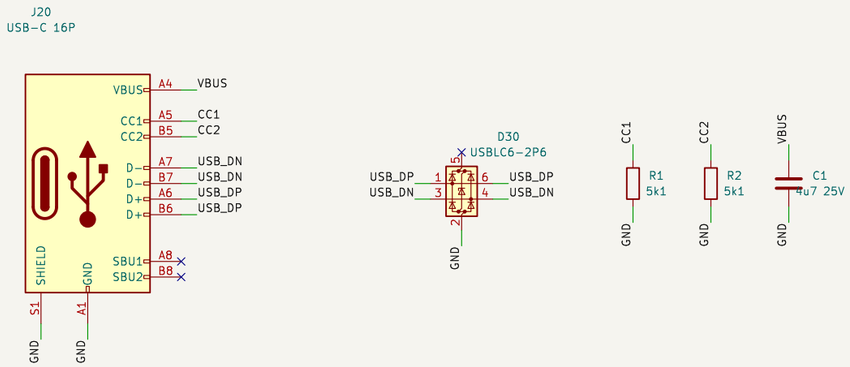


Status LEDs: driven from the coprocessor through 680R. Fit LEDs with about 2 V forward drop.

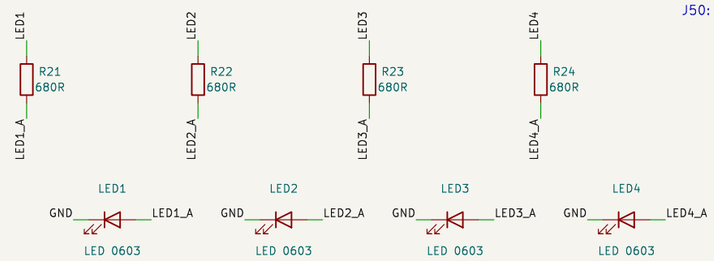


Buzzer: piezo, driven directly from a timer pin. Loudness at 3.3 V is not yet measured.

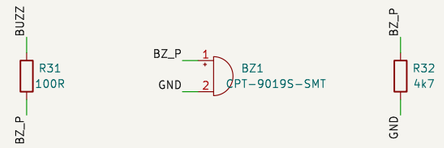


J50: 30-way 0.5 mm FFC, signals

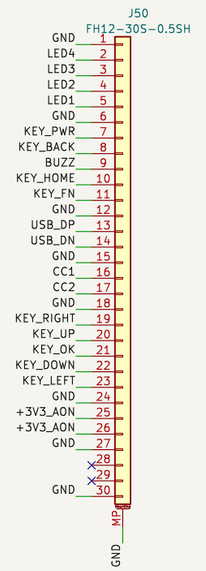

Keys: one line each, closed = low. 10k pull-up to the always-on rail and 100n on the board.

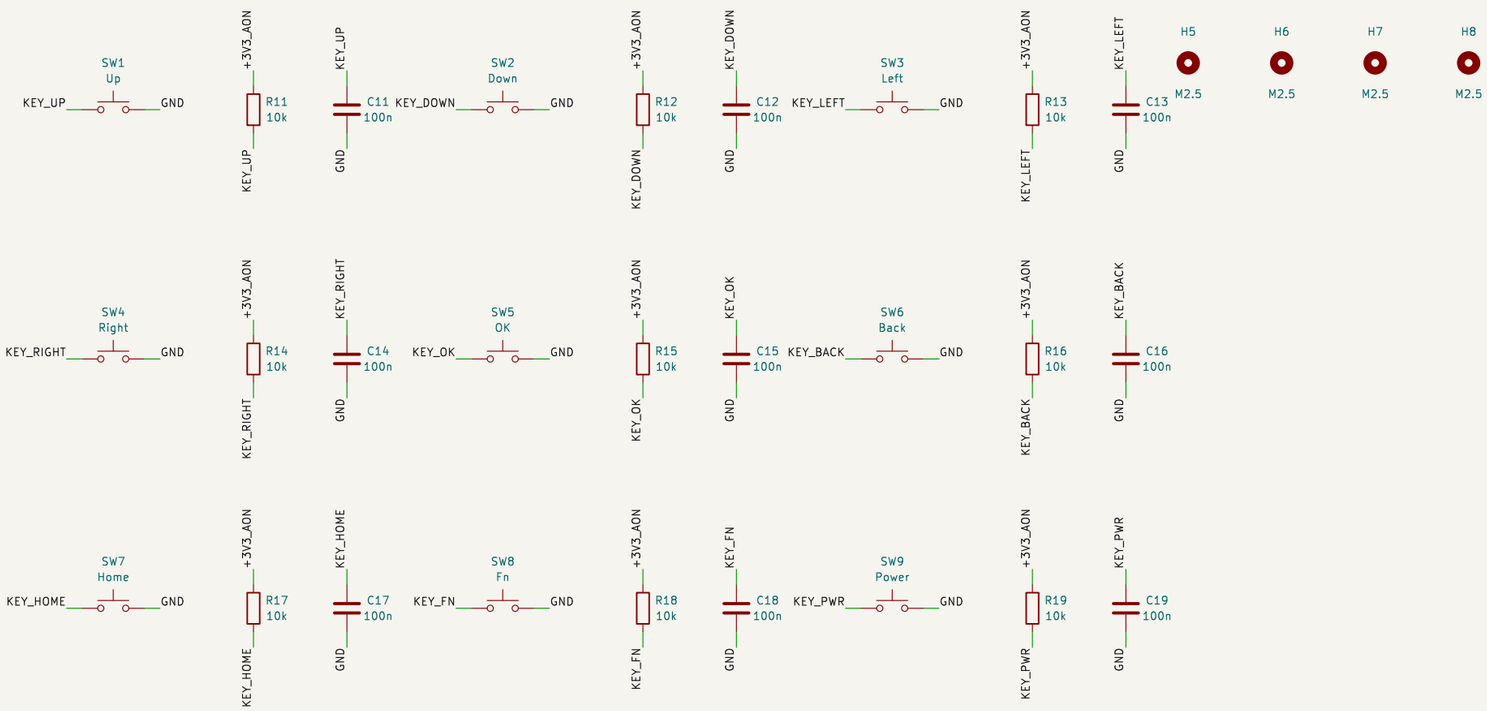

J51: 20-way 0.5 mm FFC, power

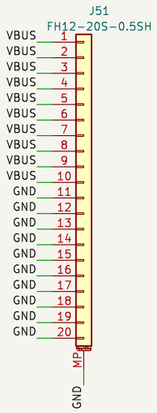

VBUS: 10 contacts, 0.5 A each. Charger input must stay at or below 3 A.

J50 / J51 pin assignments are defined here
UNTESTED rev A. Generated by tools/gen_lower.py
MT Tech Services LLC

Sheet: /
File: netscope-x1-lower.kicad_sch

Title: NetScope X1 keypad and USB-C board

Size: A3	Date:	**Rev: A**
KiCad E.D.A. 9.0.9		Id: 1/1