

NetScope RT−1 remote terminator, rev A. UNTESTED: not built, not measured.

One series diode + resistor per pair. Diode anode on the first pin of the pair.



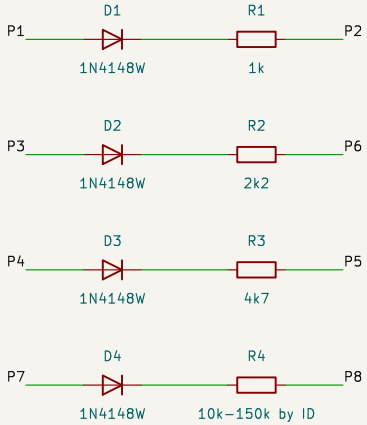

pair 1−2: forward (pin 1 positive) reads 1k, reverse reads open

pair 3−6: forward (pin 3 positive) reads 2k2, reverse reads open

pair 4−5: forward (pin 4 positive) reads 4k7, reverse reads open

pair 7−8: forward (pin 7 positive) reads 10k−150k, reverse reads open

R4 sets the terminator ID: ID 1 = 10k ID 2 = 15k ID 3 = 22k ID 4 = 33k ID 5 = 47k ID 6 = 68k ID 7 = 100k ID 8 = 150k

R1−R4 are 2512 so power−rated parts can be fitted. A passive 57 V injector on a miswired run puts
3.2 W in a 1k part, 1.5 W in 2k2, 0.7 W in 4k7 and 0.33 W in 10k. Surviving that is NOT yet designed or tested.

No connection to the cable shield: J1 is unshielded and the wiremap does not test the shield.

Generated by tools/gen_rt1.py
UNTESTED rev A. Values from firmware/netscope/cable/terminator.py.
MT Tech Services LLC

Sheet: /
File: rt−1.kicad_sch

Title: NetScope RT−1 remote terminator

Size: A4	Date:	**Rev: A**
KiCad E.D.A. 9.0.9		Id: 1/1