



Chapter 8: IP Addressing



Introduction to Networks

Cisco | Networking Academy®
Mind Wide Open™



Chapter 8

8.0 Introduction

8.1 IPv4 Network Addresses

8.2 IPv6 Network Addresses

8.3 Connectivity Verification

8.4 Summary



Chapter 8: Objectives

In this chapter, you will be able to:

- Describe the structure of an IPv4 address.
- Describe the purpose of the subnet mask.
- Compare the characteristics and uses of the unicast, broadcast and multicast IPv4 addresses.
- Explain the need for IPv6 addressing.
- Describe the representation of an IPv6 address.
- Describe types of IPv6 network addresses.
- Configure global unicast addresses.



IP Addressing Introduction

In this chapter, you will be able to (continued):

- Describe multicast addresses.
- Describe the role of ICMP in an IP network (include IPv4 and IPv6)
- Use ping and traceroute utilities to test network connectivity



8.1

IPv4 Network Addresses



IPv4 Address Structure

Binary Notation

- Binary notation refers to the fact that computers communicate in 1s and 0s
- Converting binary to decimal requires an understanding of the mathematical basis of a numbering system – positional notation

Positional Notation

192


	Hundreds	Tens	Ones
Radix	10	10	10
Exponent	2	1	0
Positional Value	100	10	1
Numerical Identifier	1	9	2
Numerical Value	$1 \times 100 = 100$	$9 \times 10 = 90$	$2 \times 1 = 2$

$100 + 90 + 2$



IPv4 Address Structure

Binary Number System

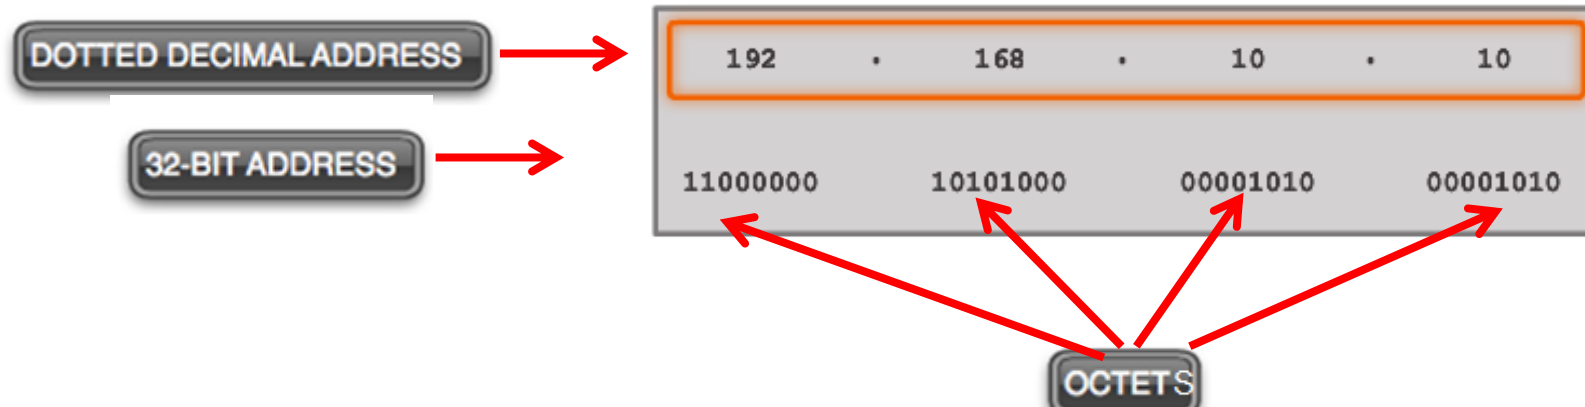

Radix	2	2	2	2	2	2	2	2
Exponent	7	6	5	4	3	2	1	0
Octet Bit Values	128	64	32	16	8	4	2	1
Binary Address	1	1	0	0	0	0	0	0
Binary Bit Values	128	64	0	0	0	0	0	0

Add the binary bit values.

$$128 + 64 = 192$$



IPv4 Address Structure

Converting a Binary Address to Decimal

Practice

2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
128	64	32	16	8	4	2	1
1	0	1	1	0	0	0	0

2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
128	64	32	16	8	4	2	1
1	1	1	1	1	1	1	1



IPv4 Address Structure

Converting from Decimal to Binary

Convert Decimal to Binary
 192.168.10.10
 ↙ ↘
 11000000 10101000

	128	64	32	16	8	4	2	1
168 > 128, place a 1 in the 128 position -128 subtract 128	1							
40 < 64, place a 0 in the 64 position do not subtract	1	0						
40 > 32, place a 1 in the 32 position -32 subtract 32	1	0	1					
8 < 16, place a 0 in the 16 position do not subtract	1	0	1	0				
8 = 8, place a 1 in the 8 position subtract 8	1	0	1	0	1			
0 place a 0 in all remaining positions All done. Result	1	0	1	0	1	0	0	0




IPv4 Address Structure

Converting from Decimal to Binary Conversions

Convert Decimal to Binary


192.168.10.10

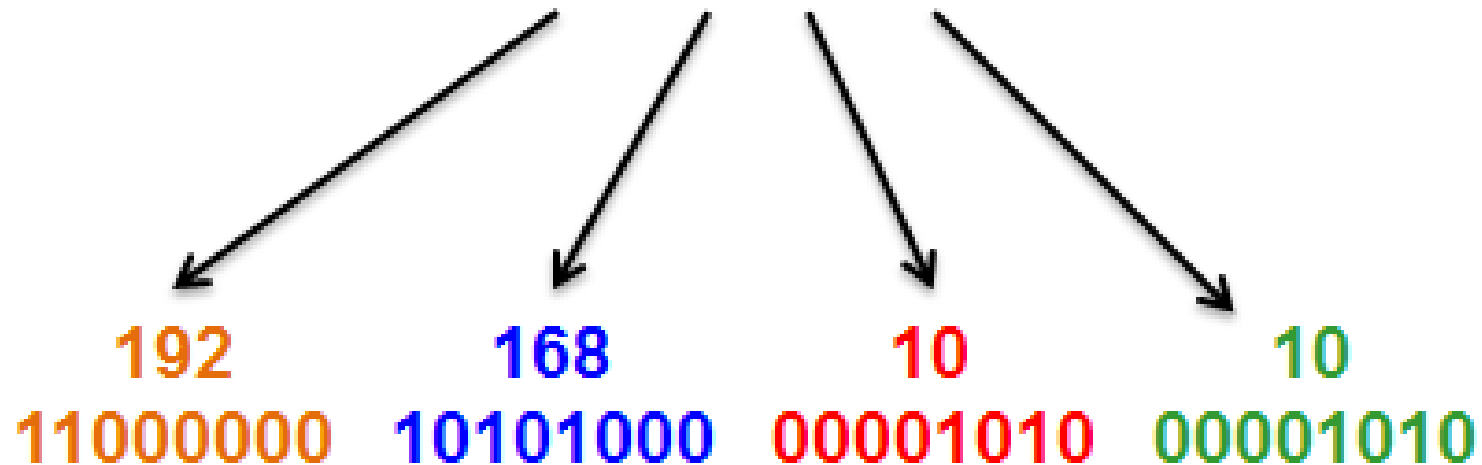



IPv4 Subnet Mask

Network Portion and Host Portion of an IPv4 Address

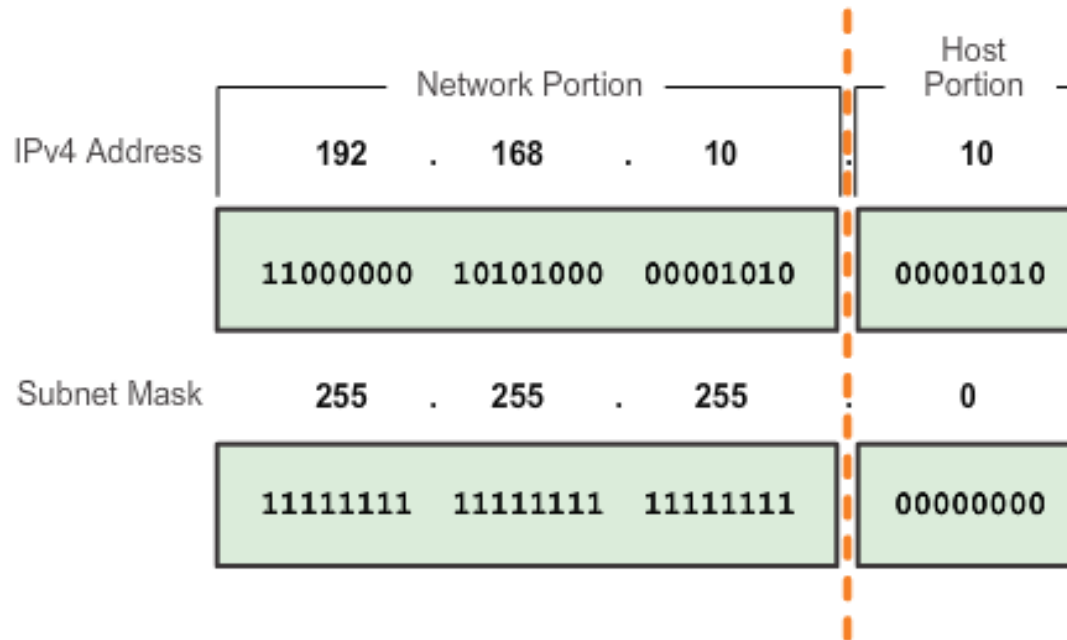

- To define the network and host portions of an address, a devices use a separate 32-bit pattern called a subnet mask
- The subnet mask does not actually contain the network or host portion of an IPv4 address, it just says where to look for these portions in a given IPv4 address



IPv4 Subnet Mask

Network Portion and Host Portion of an IPv4 Address

Valid Subnet Masks

Subnet Value	Bit Value							
	128	64	32	16	8	4	2	1
255	1	1	1	1	1	1	1	1
254	1	1	1	1	1	1	1	0
252	1	1	1	1	1	1	0	0
248	1	1	1	1	1	0	0	0
240	1	1	1	1	0	0	0	0
224	1	1	1	0	0	0	0	0
192	1	1	0	0	0	0	0	0
128	1	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0



IPv4 Subnet Mask

Examining the Prefix Length


	<u>Dotted Decimal</u>	<u>Significant bits shown in binary</u>
Network Address	10.1.1.0/24	10.1.1.00000000
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.254	10.1.1.11111110
Broadcast Address	10.1.1.255	10.1.1.11111111
Number of hosts: $2^8 - 2 = 254$ hosts		
Network Address	10.1.1.0/25	10.1.1.00000000
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.126	10.1.1.01111110
Broadcast Address	10.1.1.127	10.1.1.01111111
Number of hosts: $2^7 - 2 = 126$ hosts		
Network Address	10.1.1.0/26	10.1.1.00000000
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.62	10.1.1.00111110
Broadcast Address	10.1.1.63	10.1.1.00111111
Number of hosts: $2^6 - 2 = 62$ hosts		



IPv4 Subnet Mask

IPv4 Network, Host, and Broadcast Address

10.1.1.0/24 Network

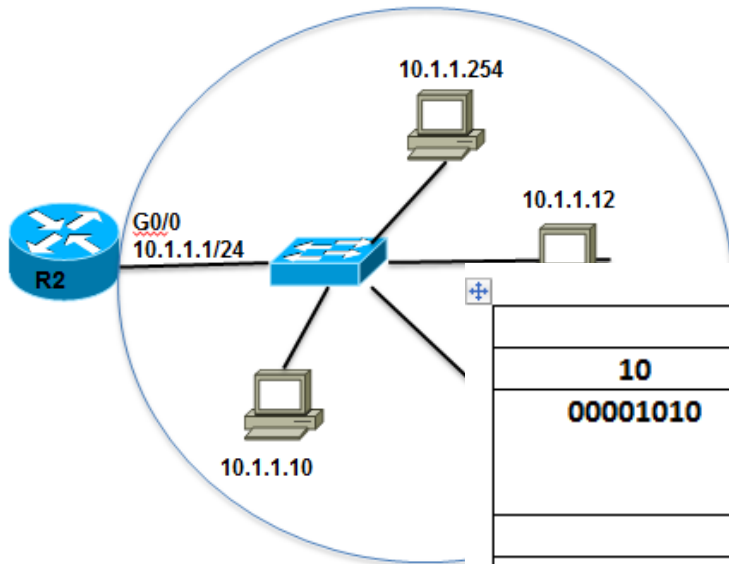


Network Portion			Host Portion	
10	1	1	0	
00001010	00000001	00000001	00000000	All 0s – NETWORK ADDRESS
10	1	1	10	
00001010	00000001	00000001	00001010	0s and 1s in host portion
10	1	1	255	
00001010	00000001	00000001	11111111	All 1s – BROADCAST ADDRESS



IPv4 Subnet Mask

First Host and Last Host Addresses

10.1.1.0/24 Network

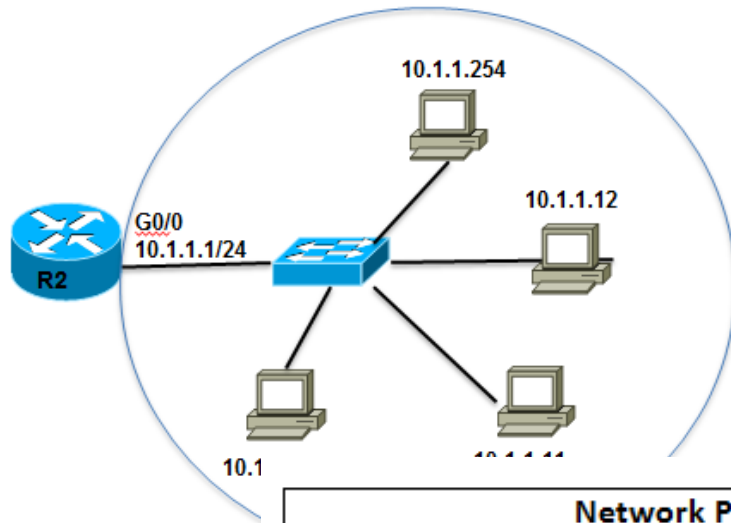

Network Portion			Host Portion	
10	1	1	1	FIRST HOST
00001010	00000001	00000001	00000001	All 0s and a 1 in the host portion
10	1	1	254	LAST HOST
00001010	00000001	00000001	11111110	All 1s and a 0 in the host portion



IPv4 Subnet Mask

Bitwise AND Operation

IPv4 Address **192** **.** **168** **.** **10** **.** **10**

11000000 10101000 00001010 00001010

Subnet Mask **255** **.** **255** **.** **255** **.** **0**

11111111 11111111 11111111 00000000

11000000 10101000 00001010 00000000

Network Address **192** **.** **168** **.** **10** **.** **0**


1 AND 1 = 1 1 AND 0 = 0 0 AND 1 = 0 0 AND 0 = 0




IPv4 Unicast, Broadcast, and Multicast

Assigning a Static IPv4 Address to a Host

LAN Interface Properties

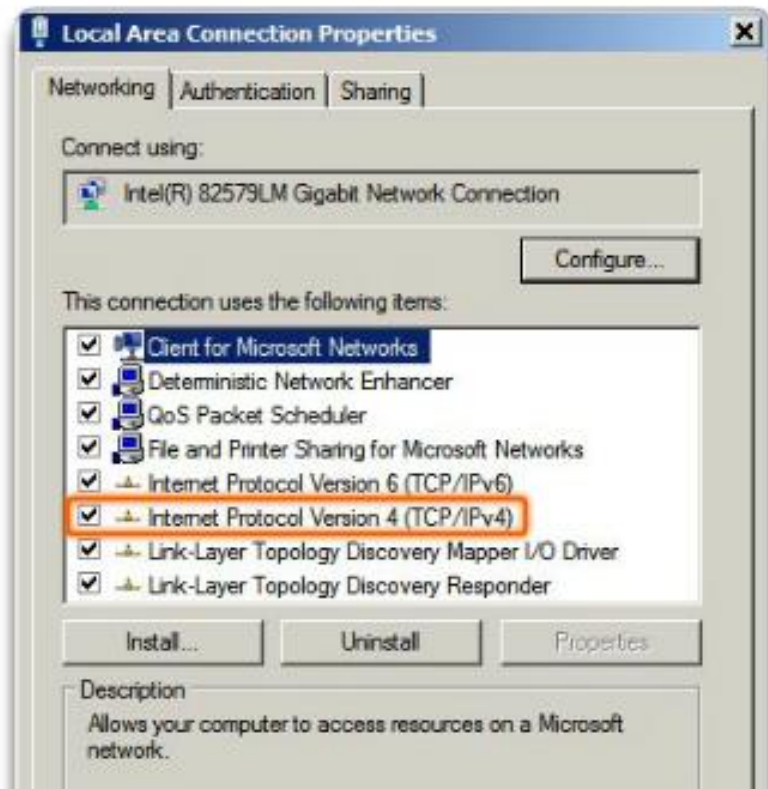



Configuring a Static IPv4 Address

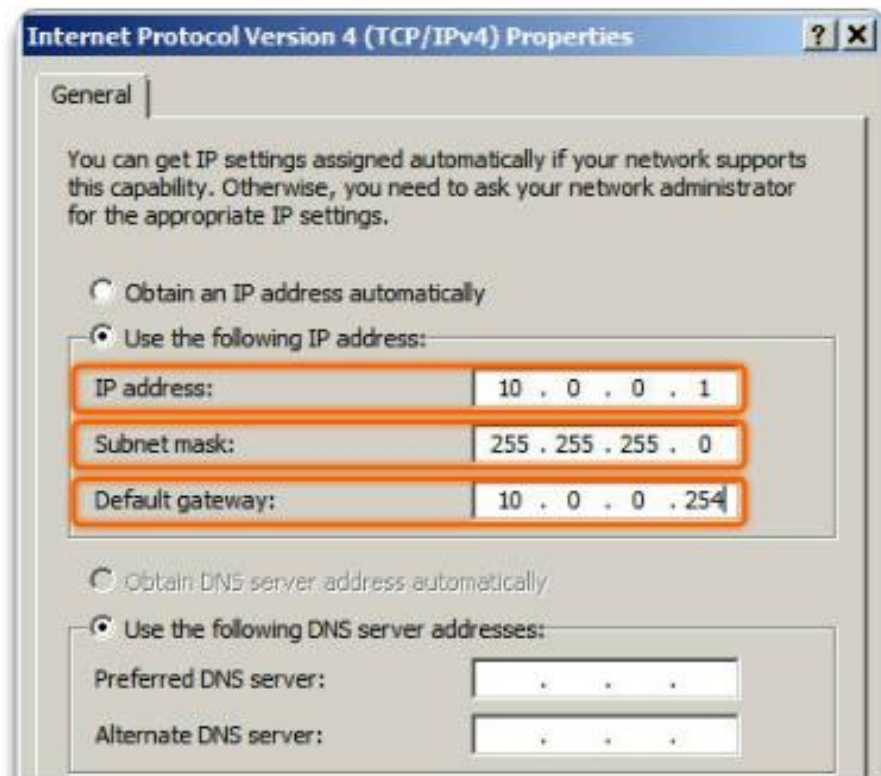



IPv4 Unicast, Broadcast, and Multicast

Assigning a Dynamic IPv4 Address to a Host

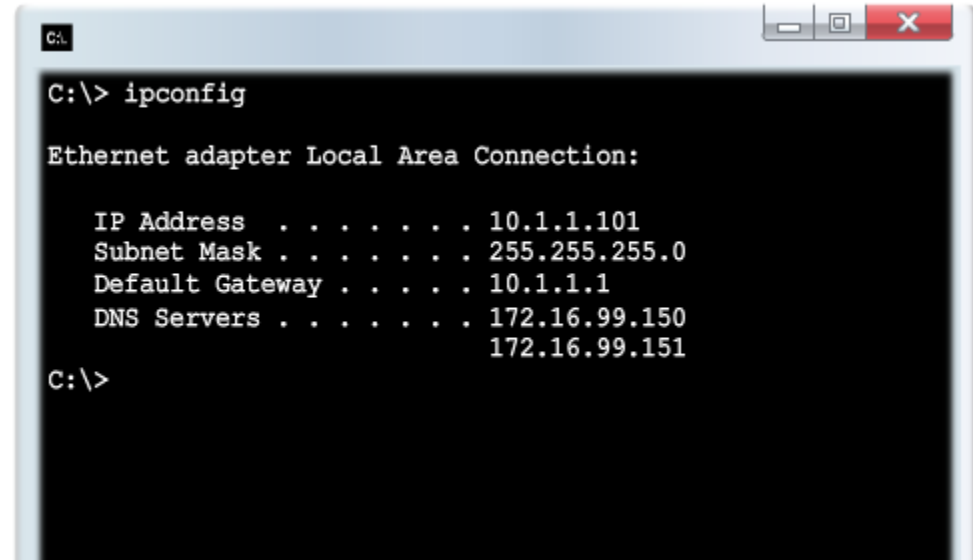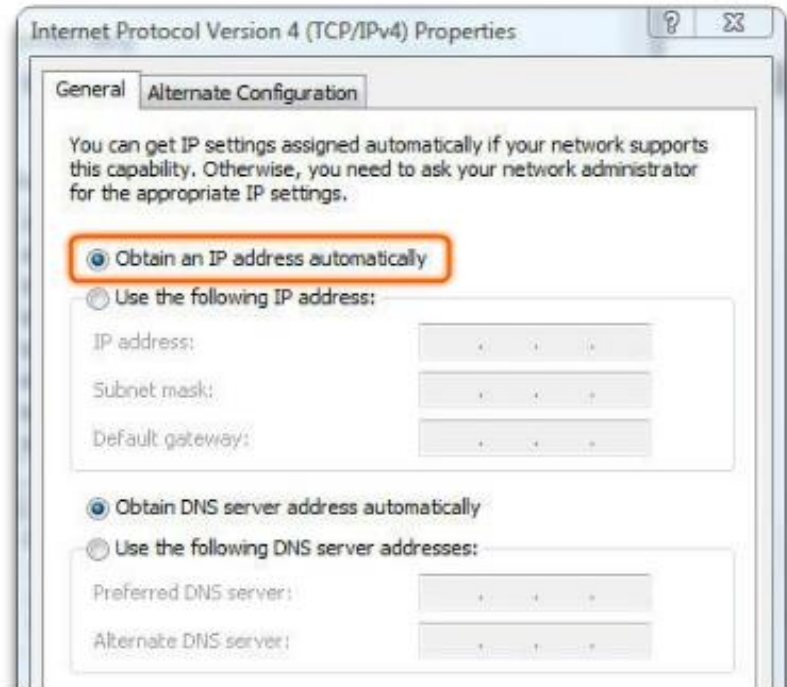

Verification

DHCP - preferred method of “leasing” IPv4 addresses to hosts on large networks, reduces the burden on network support staff and virtually eliminates entry errors




IPv4 Unicast, Broadcast, and Multicast

Unicast Transmission

In an IPv4 network, the hosts can communicate one of three different ways:

1. **Unicast** - the process of sending a packet from one host to an individual host.

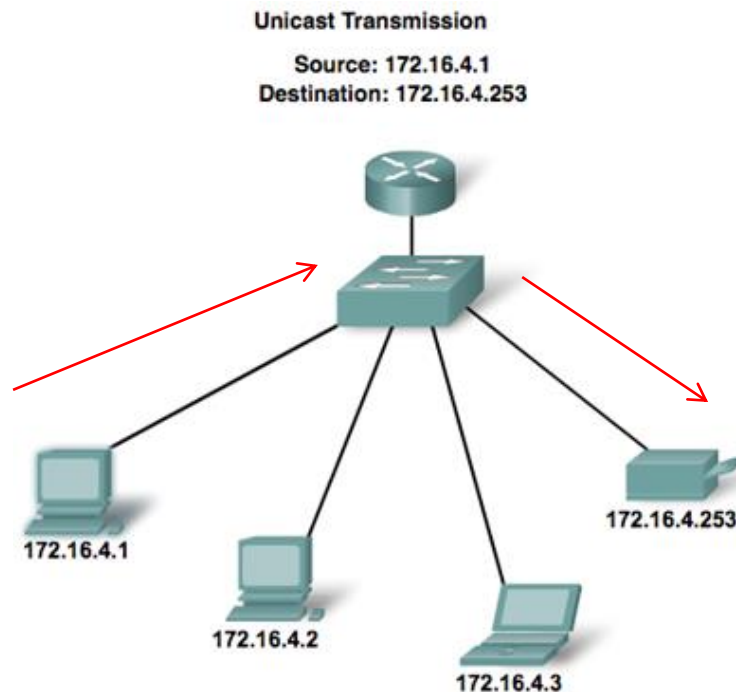




IPv4 Unicast, Broadcast, and Multicast

Broadcast Transmission

2. **Broadcast** - the process of sending a packet from one host to all hosts in the network

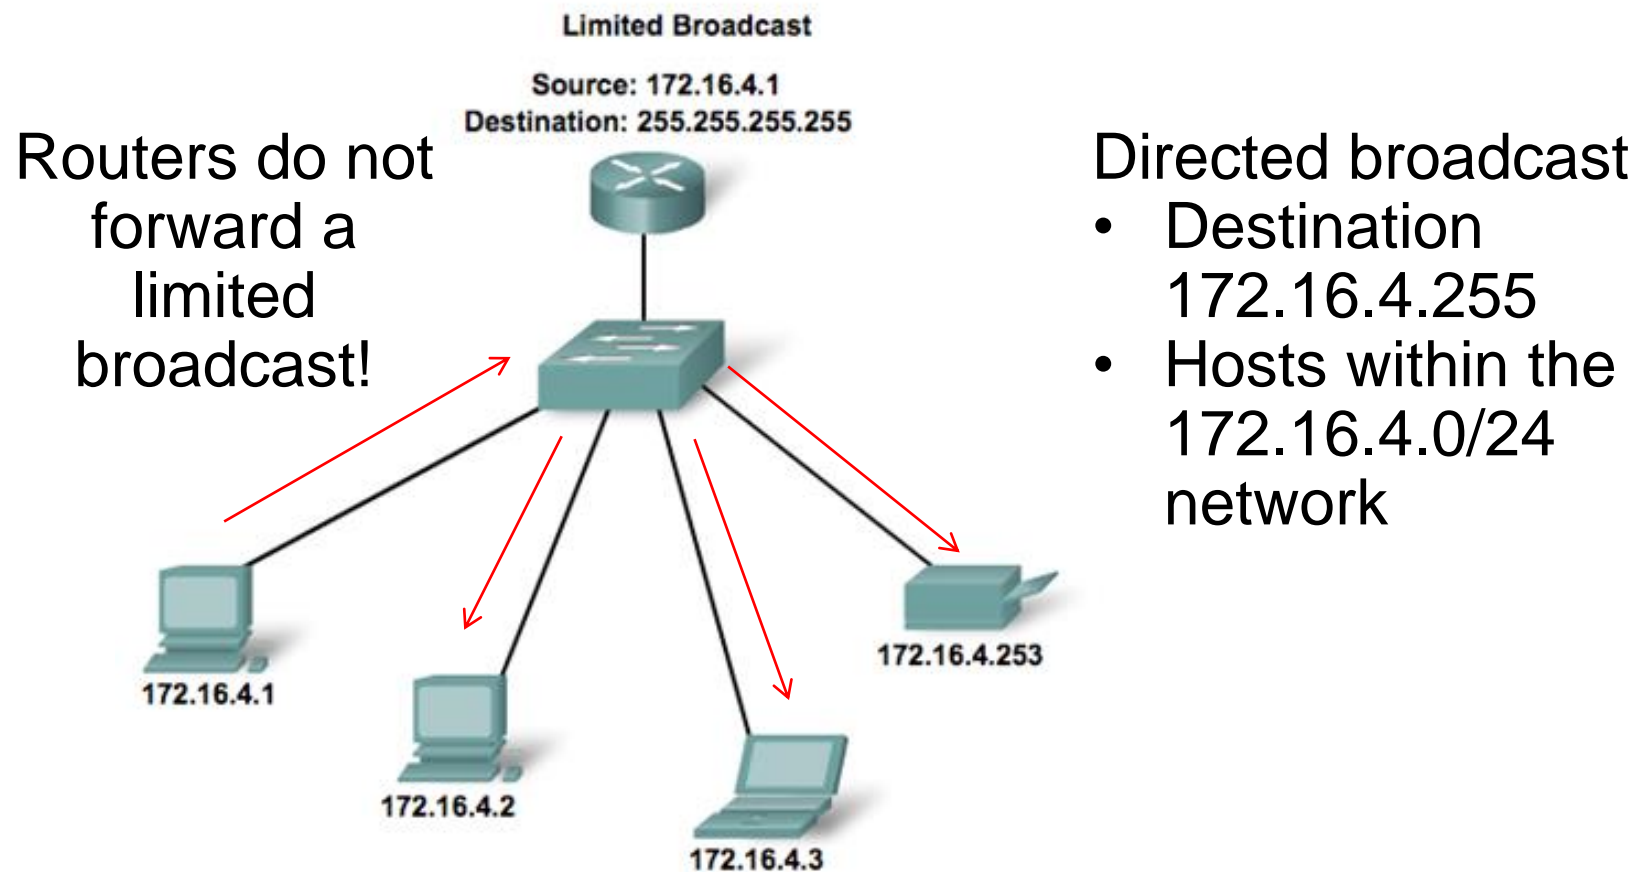



IPv4 Unicast, Broadcast, and Multicast

Multicast Transmission

- **Multicast** - the process of sending a packet from one host to a selected group of hosts, possibly in different networks
- Reduces traffic
- Reserved for addressing multicast groups - 224.0.0.0 to 239.255.255.255.
- Link local - 224.0.0.0 to 224.0.0.255 (Example: routing information exchanged by routing protocols)
- Globally scoped addresses - 224.0.1.0 to 238.255.255.255 (Example: 224.0.1.1 has been reserved for Network Time Protocol)



Types of IPv4 Address

Public and Private IPv4 Addresses

Private address blocks are:

- Hosts that do not require access to the Internet can use private addresses
- 10.0.0.0 to 10.255.255.255 (10.0.0.0/8)
- 172.16.0.0 to 172.31.255.255 (172.16.0.0/12)
- 192.168.0.0 to 192.168.255.255 (192.168.0.0/16)

Shared address space addresses:

- Not globally routable
- Intended only for use in service provider networks
- Address block is 100.64.0.0/10



Types of IPv4 Address

Special Use IPv4 Addresses

- **Network and Broadcast addresses** - within each network the first and last addresses cannot be assigned to hosts
- **Loopback address** - 127.0.0.1 a special address that hosts use to direct traffic to themselves (addresses 127.0.0.0 to 127.255.255.255 are reserved)
- **Link-Local address** - 169.254.0.0 to 169.254.255.255 (169.254.0.0/16) addresses can be automatically assigned to the local host
- **TEST-NET addresses** - 192.0.2.0 to 192.0.2.255 (192.0.2.0/24) set aside for teaching and learning purposes, used in documentation and network examples
- **Experimental addresses** - 240.0.0.0 to 255.255.255.254 are listed as reserved



Types of IPv4 Address

Legacy Classful Addressing

IP Address Classes

Address Class	1st octet range (decimal)	1st octet bits (green bits do not change)	Network(N) and Host(H) parts of address	Default subnet mask (decimal and binary)	Number of possible networks and hosts per network
A	1-127**	00000000-01111111	N.H.H.H	255.0.0.0	128 nets (2^7) 16,777,214 hosts per net ($2^{24}-2$)
B	128-191	10000000-10111111	N.N.H.H	255.255.0.0	16,384 nets (2^{14}) 65,534 hosts per net ($2^{16}-2$)
C	192-223	11000000-11011111	N.N.N.H	255.255.255.0	2,097,150 nets (2^{21}) 254 hosts per net (2^8-2)
D	224-239	11100000-11101111	NA (multicast)		
E	240-255	11110000-11111111	NA (experimental)		



Types of IPv4 Address

Legacy Classful Addressing

Classless Addressing

- Formal name is Classless Inter-Domain Routing (CIDR, pronounced “cider
- Created a new set of standards that allowed service providers to allocate IPv4 addresses on any address bit boundary (prefix length) instead of only by a class A, B, or C address



Types of IPv4 Address

Assignment of IP Addresses

Regional Internet Registries (RIRs)


The major registries are:





Types of IPv4 Address

Assignment of IP Addresses

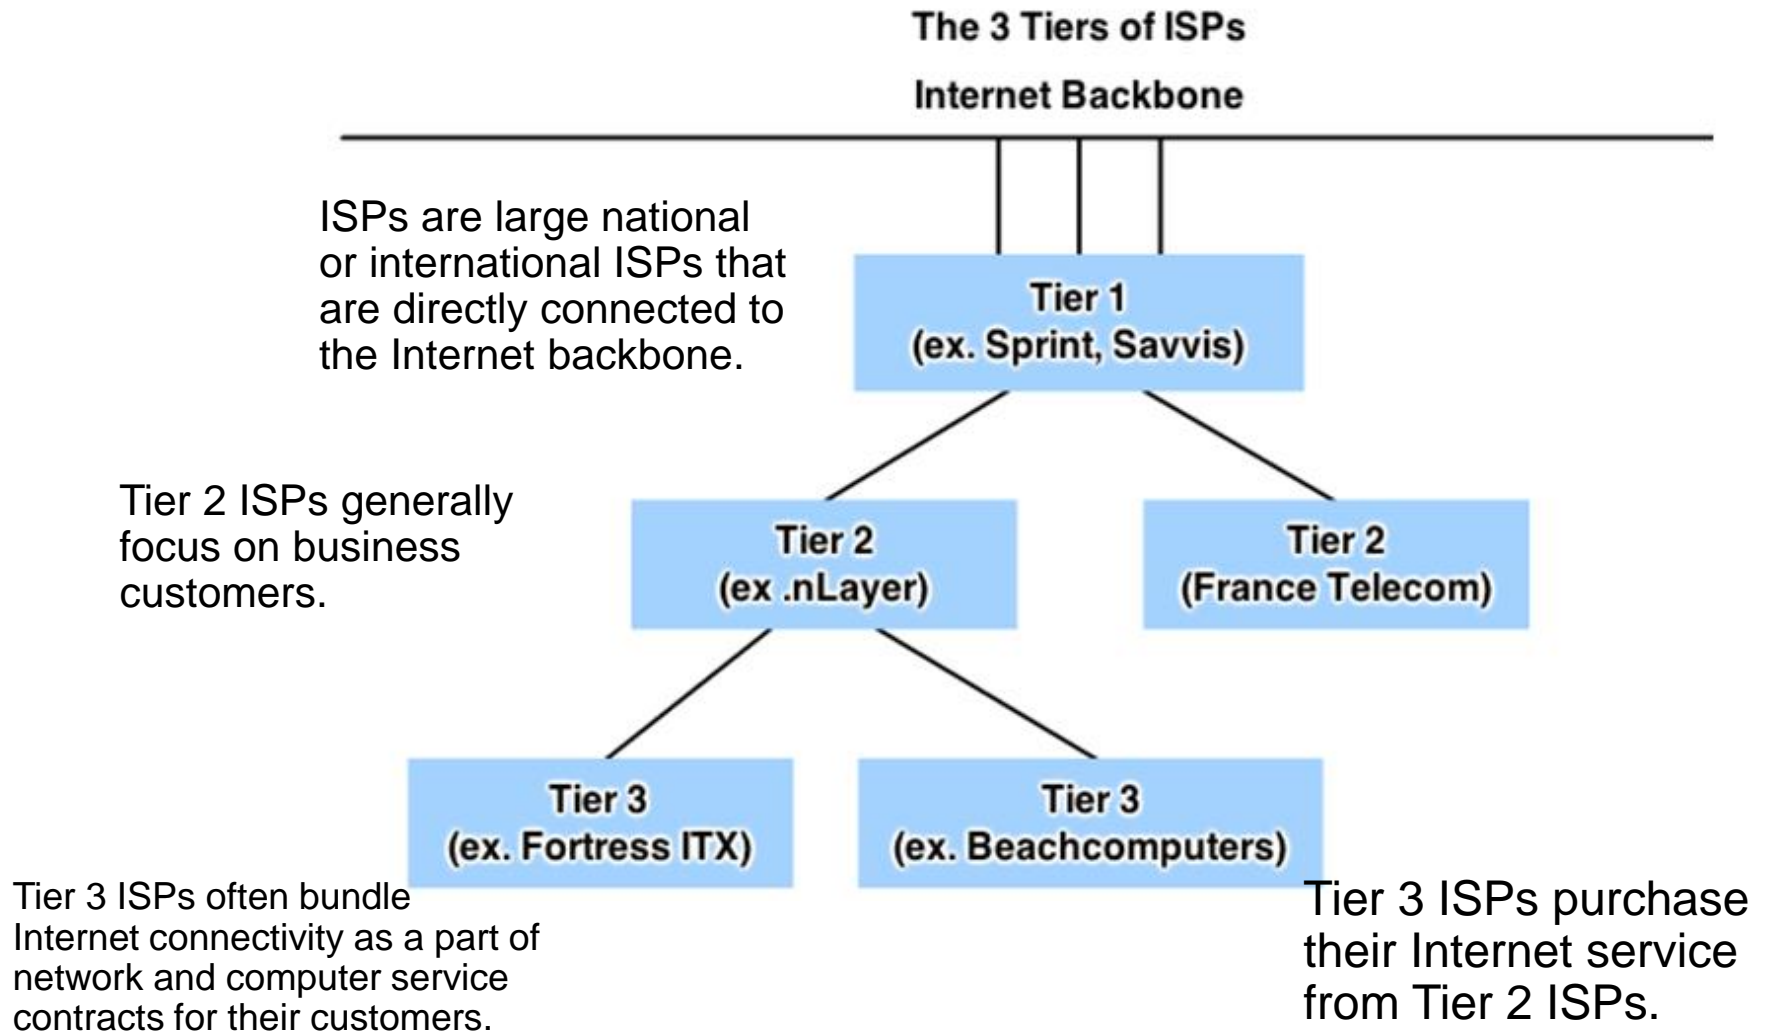



8.2

IPv6 Network Addresses



IPv4 Issues

The Need for IPv6

- IPv6 is designed to be the successor to IPv4
- Depletion of IPv4 address space has been the motivating factor for moving to IPv6
- Projections show that all five RIRs will run out of IPv4 addresses between 2015 and 2020
- With an increasing Internet population, a limited IPv4 address space, issues with NAT and an Internet of things, the time has come to begin the transition to IPv6!



IPv4 Issues

The Need for IPv6

- IPv4 has theoretical maximum of 4.3 billion addresses plus private addresses in combination with NAT
- IPv6 larger 128-bit address space providing for 340 undecillion addresses
- IPv6 fixes the limitations of IPv4 and include additional enhancements such as ICMPv6




IPv4 Issues

IPv4 and IPv6 Coexistence

The migration techniques can be divided into three categories:

#1

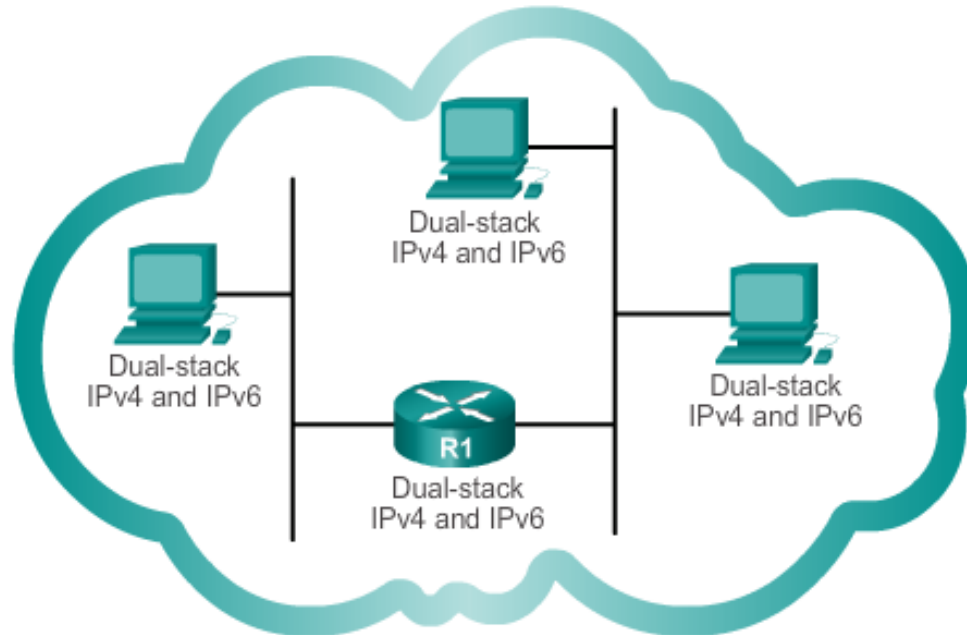


Dual-stack: Allows IPv4 and IPv6 to coexist on the same network. Devices run both IPv4 and IPv6 protocol stacks simultaneously.

IPv4 Issues

IPv4 and IPv6 Coexistence

The migration techniques can be divided into three categories:

#2

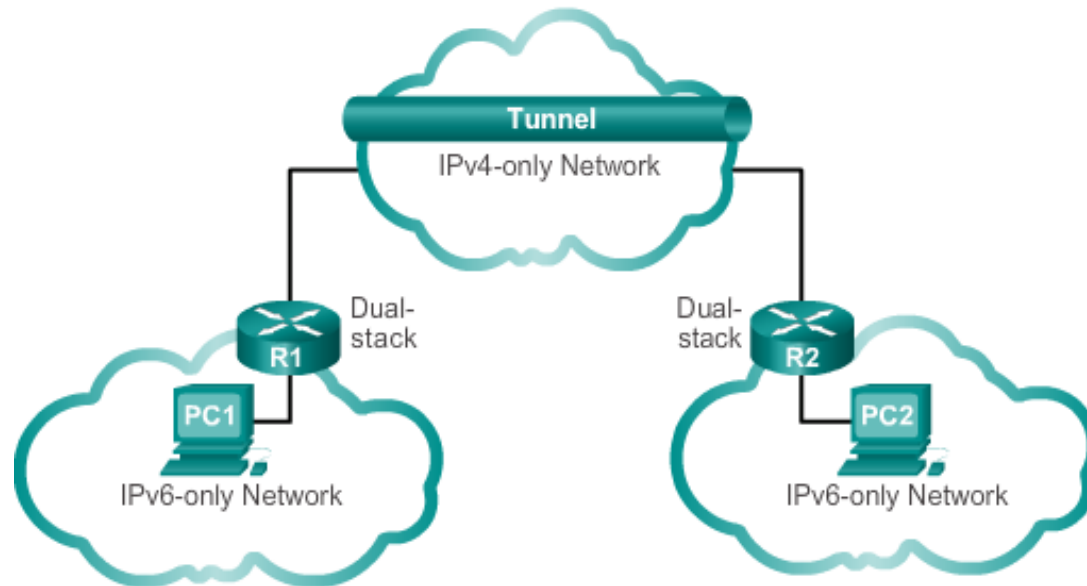


Tunnelling: A method of transporting an IPv6 packet over an IPv4 network. The IPv6 packet is encapsulated inside an IPv4 packet.

IPv4 Issues

IPv4 and IPv6 Coexistence

The migration techniques can be divided into three categories:

#3

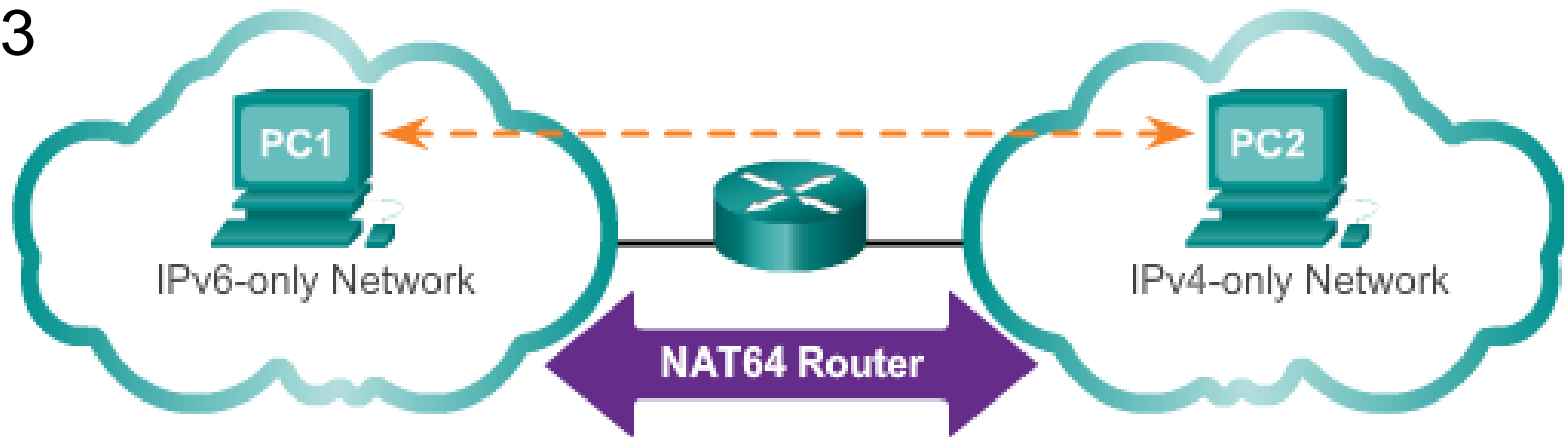

Translation: Network Address Translation 64 (NAT64) allows IPv6-enabled devices to communicate with IPv4-enabled devices using a translation technique similar to NAT for IPv4. An IPv6 packet is translated to an IPv4 packet, and vice versa.



IPv6 Addressing

Hexadecimal Number System

- Hexadecimal is a base sixteen system
- Base 16 numbering system uses the numbers 0 to 9 and the letters A to F
- Four bits (half of a byte) can be represented with a single hexadecimal value

Hexadecimal	Decimal	Binary
0	0	0000
1	1	0001
2	2	0010
3	3	0011
4	4	0100
5	5	0101
6	6	0110
7	7	0111
8	8	1000
9	9	1001
A	10	1010
B	11	1011
C	12	1100
D	13	1101
E	14	1110
F	15	1111



IPv6 Addressing

IPv6 Address Representation

- Look at the binary bit patterns that match the decimal and hexadecimal values

Hexadecimal	Decimal	Binary
00	0	0000 0000
01	1	0000 0001
02	2	0000 0010
03	3	0000 0011
04	4	0000 0100
05	5	0000 0101
06	6	0000 0110
07	7	0000 0111
08	8	0000 1000
0A	10	0000 1010
0F	15	0000 1111
10	16	0001 0000
20	32	0010 0000
40	64	0100 0000
80	128	1000 0000
C0	192	1100 0000
CA	202	1100 1010
F0	240	1111 0000
FF	255	1111 1111



IPv6 Addressing

IPv6 Address Representation

- 128 bits in length and written as a string of hexadecimal values
- In IPv6, 4 bits represents a single hexadecimal digit, 32 hexadecimal values = IPv6 address

2001:0DB8:0000:1111:0000:0000:0000:0200

FE80:0000:0000:0000:0123:4567:89AB:CDEF

- Hextet used to refer to a segment of 16 bits or four hexadecimal
- Can be written in either lowercase or uppercase



IPv6 Addressing

Rule 1- Omitting Leading 0s

- The first rule to help reduce the notation of IPv6 addresses is any leading 0s (zeros) in any 16-bit section or hextet can be omitted
- 01AB can be represented as 1AB
- 09F0 can be represented as 9F0
- 0A00 can be represented as A00
- 00AB can be represented as AB

Preferred	2001:0DB8:000A:1000:0000:0000:0000:0100
No leading <u>0s</u>	2001: DB8: A:1000: 0: 0: 0: 100
Compressed	2001:DB8:A:1000:0:0:0:100



IPv6 Addressing

Rule 2- Omitting All 0 Segments

- A double colon (::) can replace any single, contiguous string of one or more 16-bit segments (hexets) consisting of all 0's
- Double colon (::) can only be used once within an address otherwise the address will be ambiguous
- Known as the *compressed format*
- Incorrect address - 2001:0DB8::ABCD::1234



IPv6 Addressing

Rule 2- Omitting All 0 Segments

■ Examples

#1

Preferred	2001:0DB8:0000:0000:ABCD:0000:0000:0100
Omit leading 0s	2001: DB8: 0: 0:ABCD: 0: 0: 100
Compressed	2001:DB8::ABCD:0:0:100
OR	
Compressed	2001:DB8:0:0:ABCD::100

Only one :: may be used.

#2

Preferred	FE80:0000:0000:0000:0123:4567:89AB:CDEF
Omit leading 0s	FE80: 0: 0: 0: 123:4567:89AB:CDEF
Compressed	FE80::123:4567:89AB:CDEF



Types of IPv6 Addresses

IPv6 Address Types

There are three types of IPv6 addresses:

- **Unicast**
- **Multicast**
- **Anycast.**


Note: IPv6 does not have broadcast addresses.



Types of IPv6 Addresses

IPv6 Prefix Length

- IPv6 does not use the dotted-decimal subnet mask notation
- Prefix length indicates the network portion of an IPv6 address using the following format:
 - IPv6 address/prefix length
 - Prefix length can range from 0 to 128
 - Typical prefix length is /64

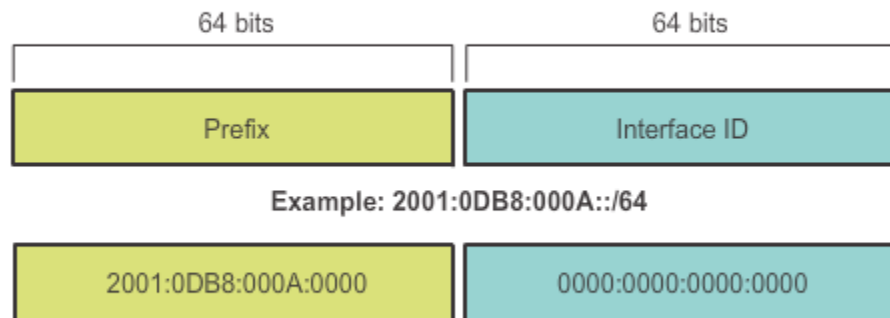


Types of IPv6 Addresses

IPv6 Unicast Addresses

■ Unicast


- Uniquely identifies an interface on an IPv6-enabled device
- A packet sent to a unicast address is received by the interface that is assigned that address.

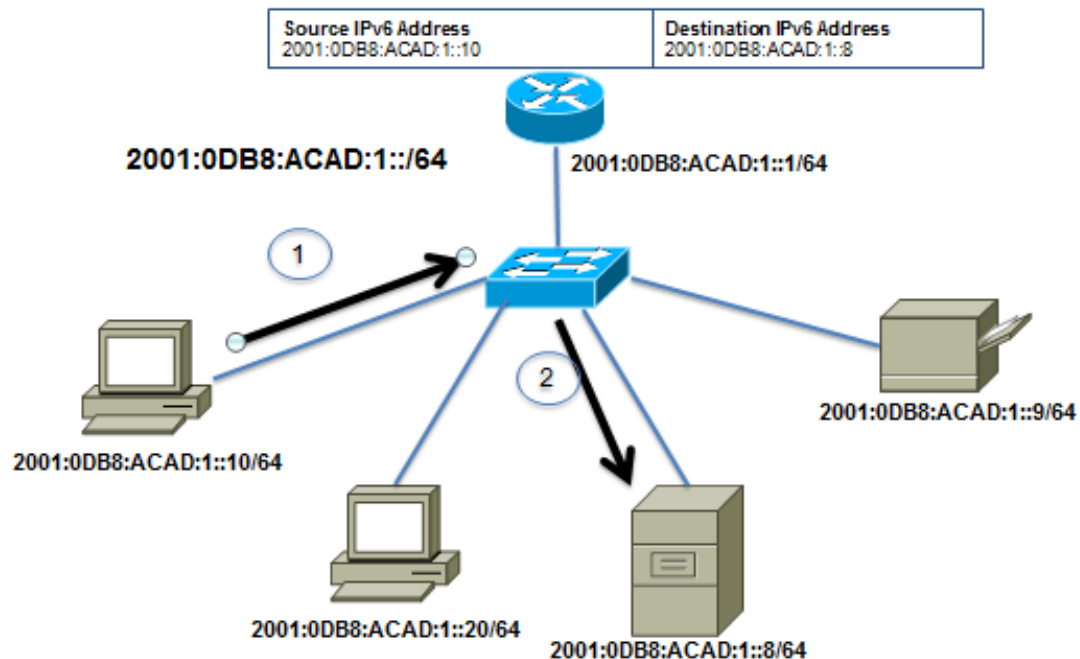



Types of IPv6 Addresses

IPv6 Unicast Addresses

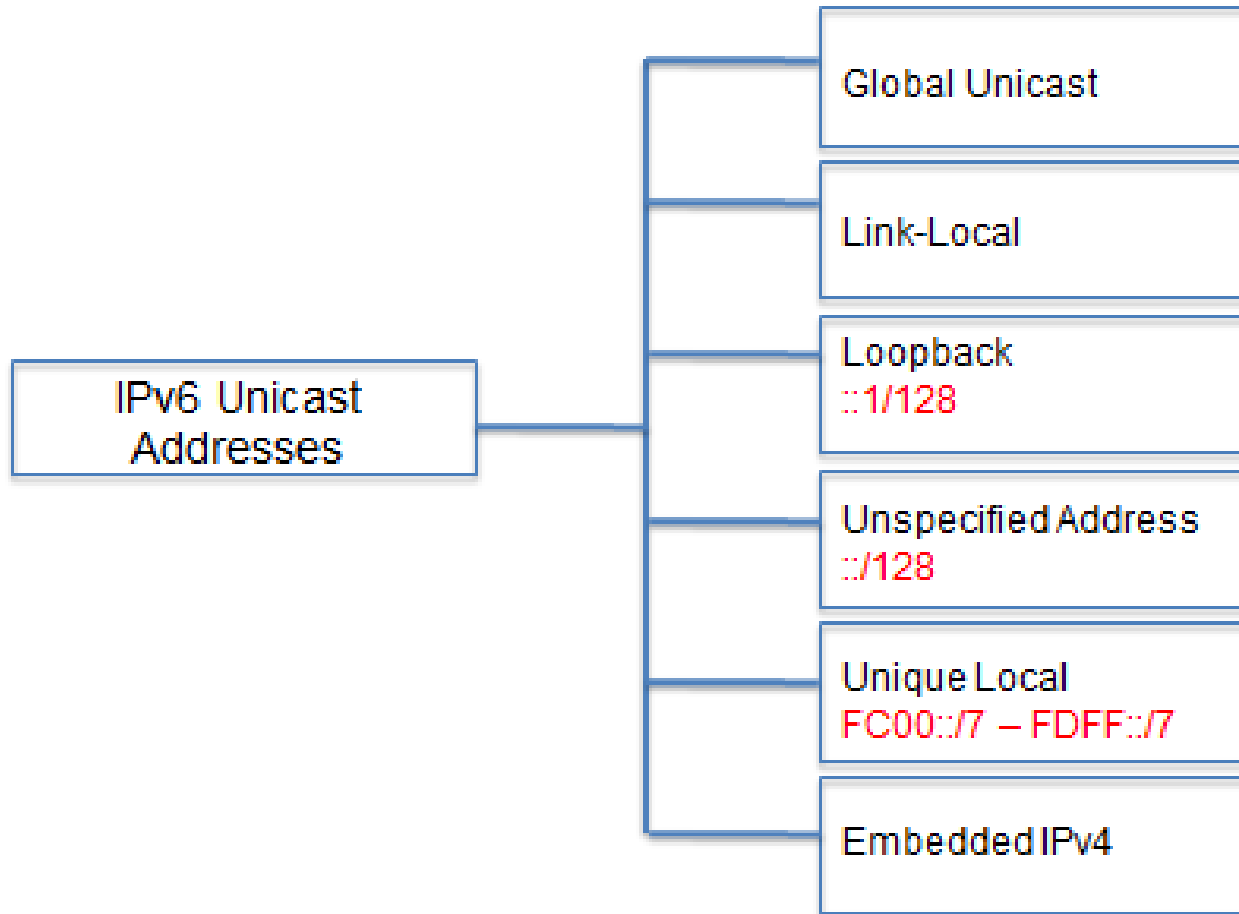



Types of IPv6 Addresses

IPv6 Unicast Addresses

■ Global unicast

- Similar to a public IPv4 address
- Globally unique
- Internet routable addresses.
- Can be configured statically or assigned dynamically

■ Link-local

- Used to communicate with other devices on the same local link
- Confined to a single link - not routable beyond the link



Types of IPv6 Addresses

IPv6 Unicast Addresses

■ Loopback

- Used by a host to send a packet to itself and cannot be assigned to a physical interface
- Ping an IPv6 loopback address to test the configuration of TCP/IP on the local host
- All-0s except for the last bit, represented as `::1/128` or just `::1`

■ Unspecified address

- All-0's address represented as `::/128` or just `::`
- Cannot be assigned to an interface and is only used as a source address
- An unspecified address is used as a source address when the device does not yet have a permanent IPv6 address or when the source of the packet is irrelevant to the destination



Types of IPv6 Addresses

IPv6 Unicast Addresses

■ Unique local

- Similar to private addresses for IPv4
- Used for local addressing within a site or between a limited number of sites
- In the range of FC00::/7 to FDFF::/7

■ IPv4 embedded (not covered in this course)


- Used to help transition from IPv4 to IPv6



Types of IPv6 Addresses

IPv6 Link-Local Unicast Addresses

- Every IPv6-enabled network interface is **REQUIRED** to have a link-local address
- Enables a device to communicate with other IPv6-enabled devices on the same link and only on that link (subnet)
- FE80::/10 range, first 10 bits are 1111 1110 10xx xxxx
- 1111 1110 10**00 0000** (FE80) - 1111 1110 10**11 1111** (FEBF)

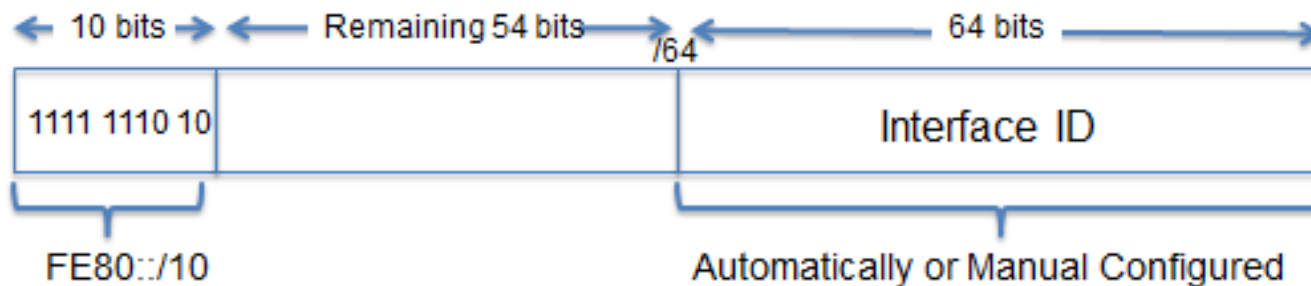




Types of IPv6 Addresses

IPv6 Link-Local Unicast Addresses

- Packets with a source or destination link-local address cannot be routed beyond the link from where the packet originated

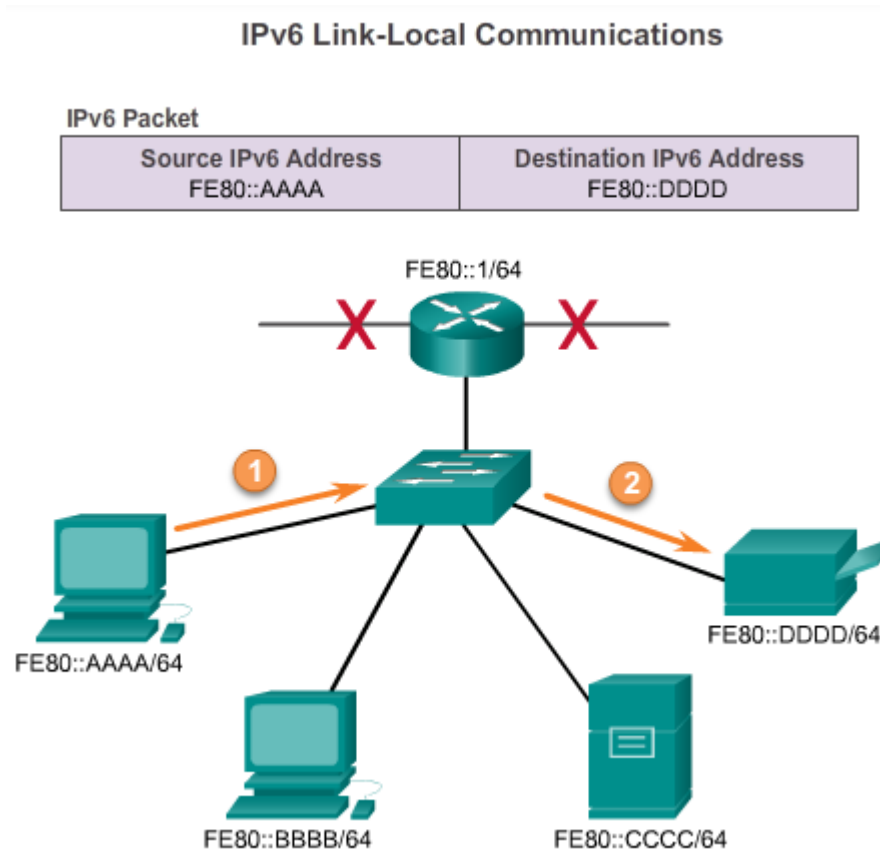



IPv6 Unicast Addresses

Structure of an IPv6 Global Unicast Address


- IPv6 global unicast addresses are globally unique and routable on the IPv6 Internet
- Equivalent to public IPv4 addresses
- ICANN allocates IPv6 address blocks to the five RIRs
- Currently, only global unicast addresses with the first three bits of 001 or 2000::/3 are being assigned



IPv6 Unicast Addresses

Structure of an IPv6 Global Unicast Address

- Currently, only global unicast addresses with the first three bits of 001 or 2000::/3 are being assigned

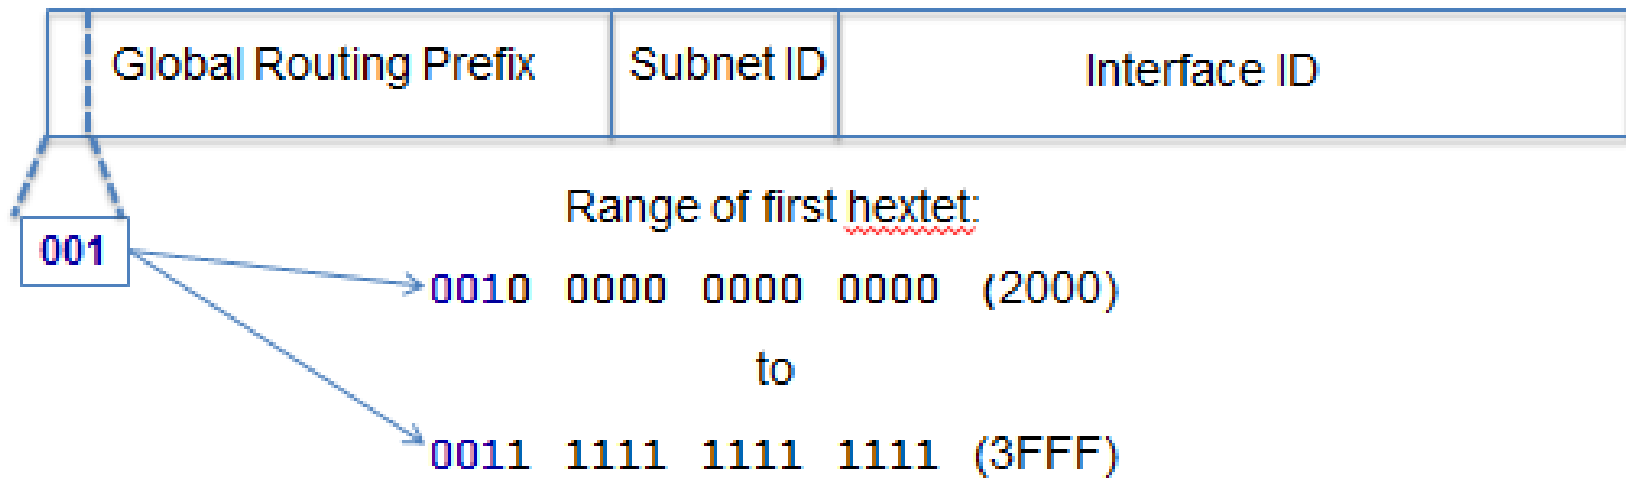




IPv6 Unicast Addresses

Structure of an IPv6 Global Unicast Address

- A global unicast address has three parts:

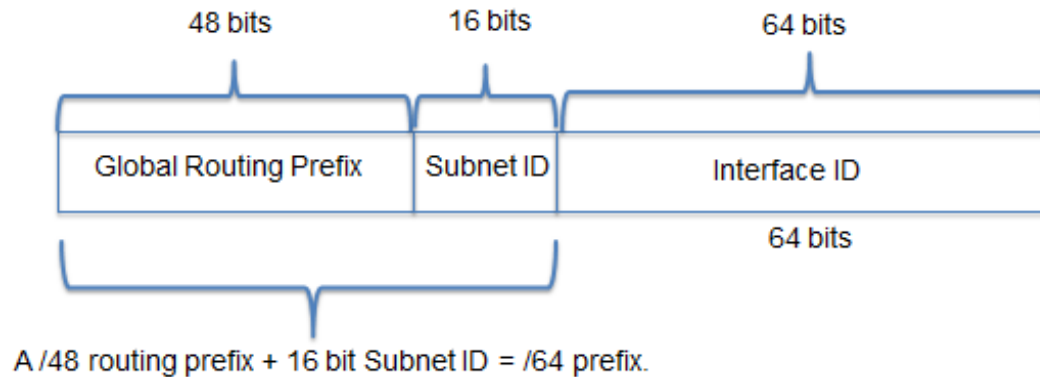

- **Global Routing Prefix-** prefix or network portion of the address assigned by the provider, such as an ISP, to a customer or site, currently, RIR's assign a /48 global routing prefix to customers
- 2001:0DB8:ACAD::/48 has a prefix that indicates that the first 48 bits (2001:0DB8:ACAD) is the prefix or network portion



IPv6 Unicast Addresses


Structure of an IPv6 Global Unicast Address

■ Subnet ID

- Used by an organization to identify subnets within its site

■ Interface ID


- Equivalent to the host portion of an IPv4 address
- Used because a single host may have multiple interfaces, each having one or more IPv6 addresses

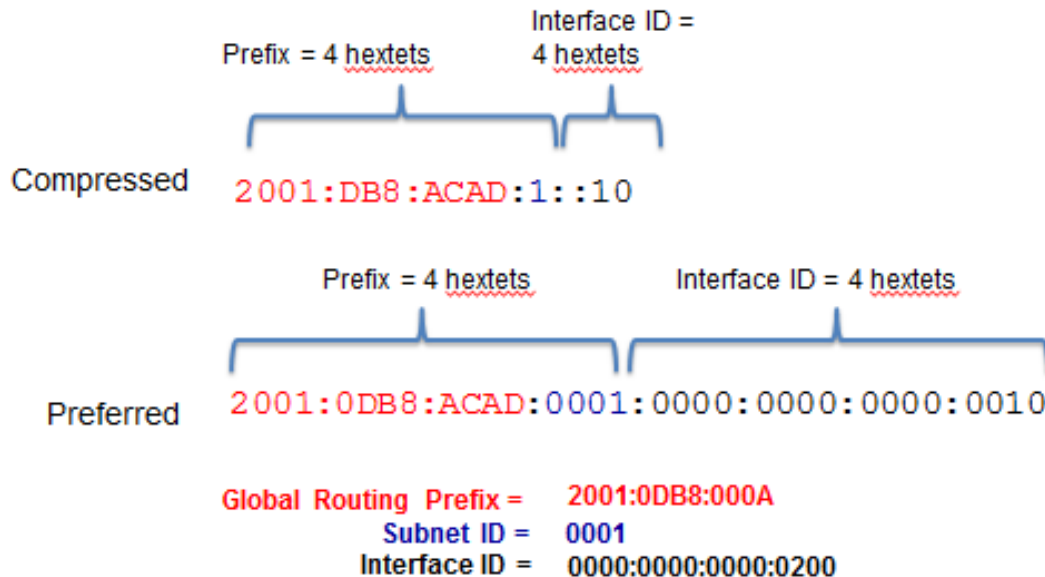



IPv6 Unicast Addresses

Static Configuration of a Global Unicast Address

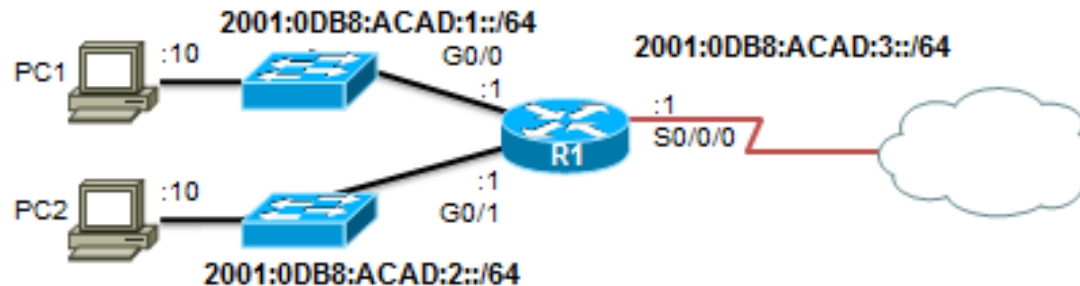

```
R1(config)#interface gigabitethernet 0/0
R1(config-if)#ipv6 address 2001:db8:acad:1::1/64
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#interface gigabitethernet 0/1
R1(config-if)#ipv6 address 2001:db8:acad:2::1/64
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#interface serial 0/0/0
R1(config-if)#ipv6 address 2001:db8:acad:3::1/64
R1(config-if)#clock rate 56000
R1(config-if)#no shutdown
```



IPv6 Unicast Addresses

Static Configuration of an IPv6 Global Unicast Address

Internet Protocol Version 6 (TCP/IPv6) Properties [?] [X]

General

You can get IPv6 settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IPv6 settings.

☐ Obtain an IPv6 address automatically

☒ Use the following IPv6 address:

IPv6 address:

Subnet prefix length:

Default gateway:

☐ Obtain DNS server address automatically

☒ Use the following DNS server addresses:

Preferred DNS server:

Alternate DNS server:

☐ Validate settings upon exit



IPv6 Unicast Addresses

Dynamic Configuration of a Global Unicast Address using SLAAC

Stateless Address Autoconfiguraton (SLAAC)

- A method that allows a device to obtain its prefix, prefix length and default gateway from an IPv6 router
- No DHCPv6 server needed
- Rely on ICMPv6 Router Advertisement (RA) messages

IPv6 routers

- Forwards IPv6 packets between networks
- Can be configured with static routes or a dynamic IPv6 routing protocol
- Sends ICMPv6 RA messages



IPv6 Unicast Addresses

Dynamic Configuration of a Global Unicast Address using SLAAC

Command **IPv6 unicast routing** enables IPv6 routing

RA message can contain one of the following three options

- SLAAC Only – use the information contained in the RA message
- SLAAC and DHCPv6 – use the information contained in the RA message and get other information from the DHCPv6 server, stateless DHCPv6 (example: DNS)
- DHCPv6 only – device should not use the information in the RA, stateful DHCPv6


Routers send ICMPv6 RA messages using the link-local address as the source IPv6 address



IPv6 Unicast Addresses

Dynamic Configuration of a Global Unicast Address using SLAAC

Router Solicitation and Router Advertisement Messages

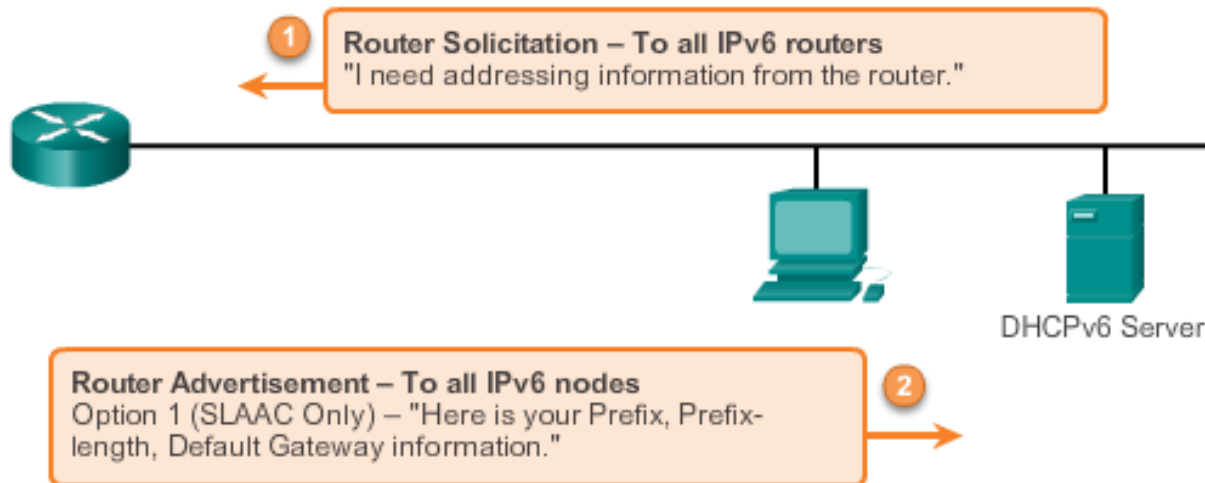

Router Advertisement Options

Option 1 (SLAAC Only) – "I'm everything you need (Prefix, Prefix-length, Default Gateway)"

Option 2 (SLAAC and DHCPv6) – "Here is my information but you need to get other information such as DNS addresses from a DHCPv6 server."

Option 3 (DHCPv6 Only) – "I can't help you. Ask a DHCPv6 server for all your information."



IPv6 Unicast Addresses

Dynamic Configuration of a Global Unicast Address using DHCPv6

Dynamic Host Configuration Protocol for IPv6 (DHCPv6)


- Similar to IPv4
- Automatically receive addressing information including a global unicast address, prefix length, default gateway address and the addresses of DNS servers using the services of a DHCPv6 server
- Device may receive all or some of its IPv6 addressing information from a DHCPv6 server depending upon whether option 2 (SLAAC and DHCPv6) or option 3 (DHCPv6 only) is specified in the ICMPv6 RA message
- Host may choose to ignore whatever is in the router's RA message and obtain its IPv6 address and other information directly from a DHCPv6 server.



IPv6 Unicast Addresses

Dynamic Configuration of a Global Unicast Address using DHCPv6

Router Solicitation and Router Advertisement Messages

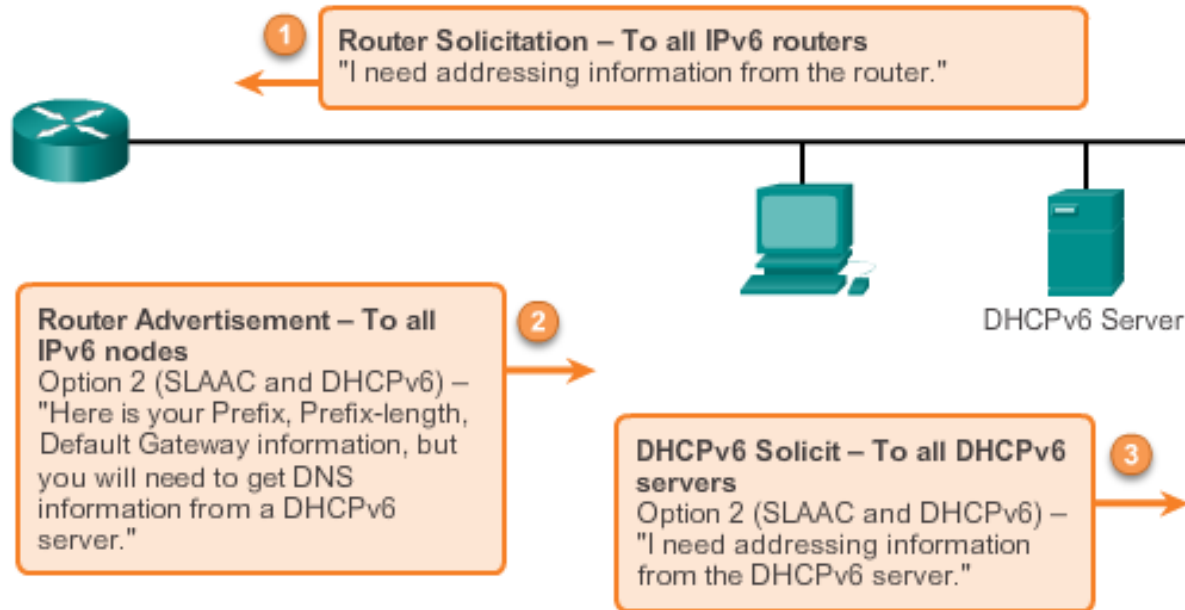

Note: An RA with option 3 (DHCPv6 Only) enabled will require the client to obtain all information from the DHCPv6 Server.



IPv6 Unicast Addresses

EUI-64 Process or Randomly Generated

EUI-64 Process

- process uses a client's 48-bit Ethernet MAC address, and inserts another 16 bits in the middle of the 46-bit MAC address to create a 64-bit Interface ID
- advantage is Ethernet MAC address can be used to determine the Interface – easily tracked

EUI-64 Interface ID is represented in binary and is made up of three parts:


- 24-bit OUI from the client MAC address, but the 7th bit (the Universally/Locally bit) is reversed (0 becomes a 1)
- inserted 16-bit value FFFE
- 24-bit device identifier from the client MAC address



IPv6 Unicast Addresses

EUI-64 Process or Randomly Generated

EUI-64 Process

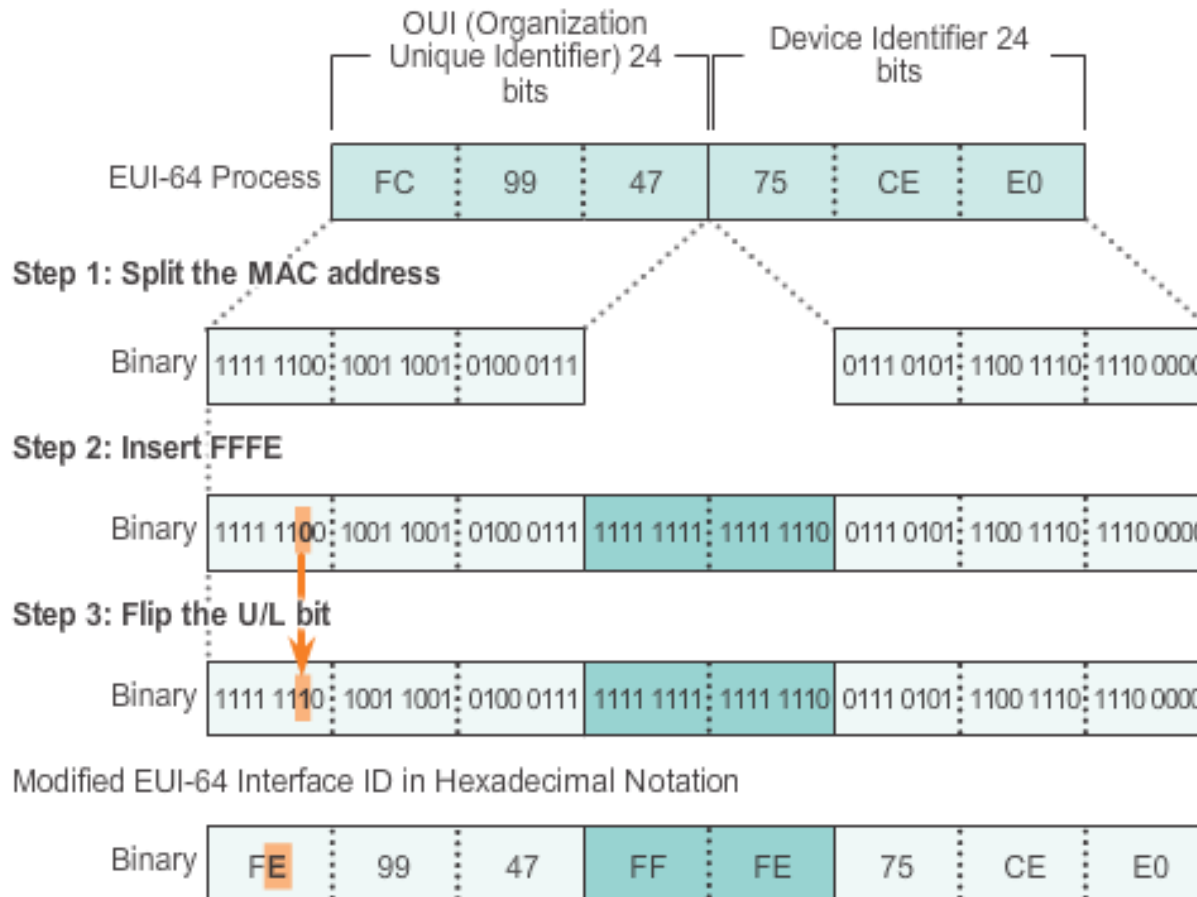



IPv6 Unicast Addresses

EUI-64 Process or Randomly Generated

```

R1#show interface gigabitethernet 0/0
GigabitEthernet0/0 is up, line protocol is up
  Hardware is CN Gigabit Ethernet, address is fc99.4775.c3e0
(bia fc99.4775.c3e0)
<Output Omitted>

R1#show ipv6 interface brief
GigabitEthernet0/0      [up/up]
  FE80::FE99:47FF:FE75:C3E0
  2001:DB8:ACAD:1::1
GigabitEthernet0/1      [up/up]
  FE80::FE99:47FF:FE75:C3E1
  2001:DB8:ACAD:2::1
Serial0/0/0             [up/up]
  FE80::FE99:47FF:FE75:C3E0
  2001:DB8:ACAD:3::1
Serial0/0/1             [administratively down/down]
  unassigned
R1#
  
```

Link-local addresses using
EUI-64



IPv6 Unicast Addresses

EUI-64 Process or Randomly Generated

Randomly Generated Interface IDs

- Depending upon the operating system, a device may use a randomly generated Interface ID instead of using the MAC address and the EUI-64 process
- Beginning with Windows Vista, Windows uses a randomly generated Interface ID instead of one created with EUI-64
- Windows XP and previous Windows operating systems used EUI-64



IPv6 Unicast Addresses

Dynamic Link-local Addresses

Link-local Address

- After a global unicast address is assigned to an interface, IPv6-enabled device automatically generates its link-local address
- Must have a link-local address which enables a device to communicate with other IPv6-enabled devices on the same subnet
- Uses the link-local address of the local router for its default gateway IPv6 address
- Routers exchange dynamic routing protocol messages using link-local addresses
- Routers' routing tables use the link-local address to identify the next-hop router when forwarding IPv6 packets




IPv6 Unicast Addresses

Dynamic Link-local Addresses

Dynamically Assigned

- Link-local address is dynamically created using the FE80::/10 prefix and the Interface ID

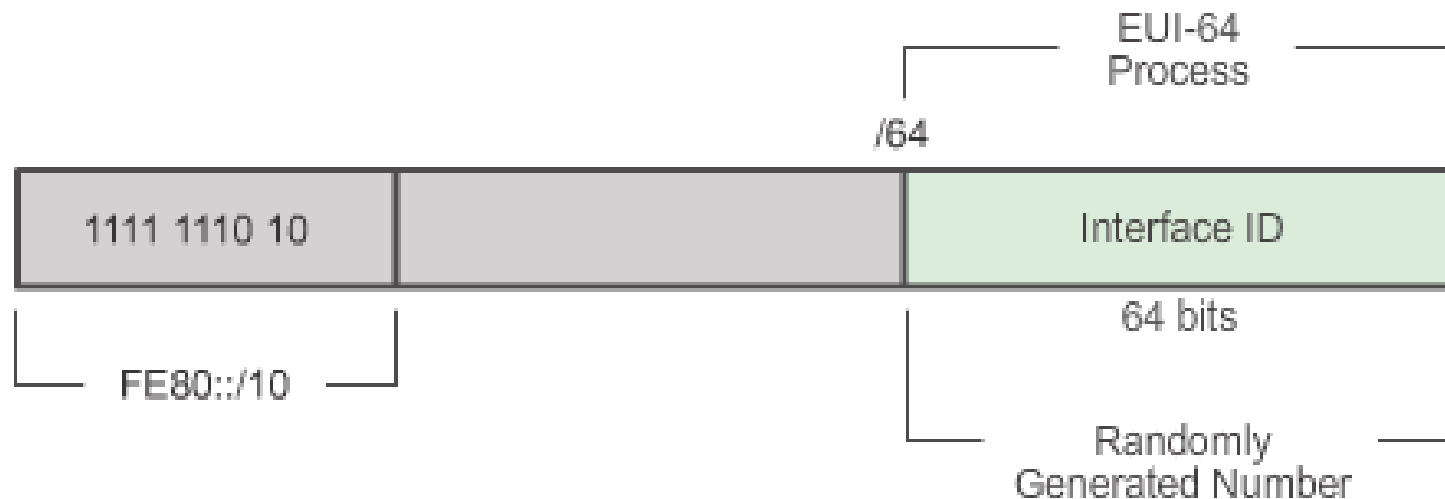



IPv6 Unicast Addresses

Static Link-local Addresses

Configuring link-local

```
R1(config)#interface gigabitethernet 0/0
R1(config-if)#ipv6 address fe80::1 ?
    link-local    Use link-local address

R1(config-if)#ipv6 address fe80::1 link-local
R1(config-if)#exit
R1(config)#interface gigabitethernet 0/1
R1(config-if)#ipv6 address fe80::1 link-local
R1(config-if)#exit
R1(config)#interface serial 0/0/0
R1(config-if)#ipv6 address fe80::1 link-local
R1(config-if)#
```



IPv6 Unicast Addresses

Static Link-local Addresses

Configuring link-local

```
R1#show ipv6 interface brief
```

```
GigabitEthernet0/0      [up/up]
```

```
FE80::1
```

```
2001:DB8:ACAD:1::1
```

```
GigabitEthernet0/1      [up/up]
```

```
FE80::1
```

```
2001:DB8:ACAD:2::1
```

```
Serial10/0/0            [up/up]
```

```
FE80::1
```

```
2001:DB8:ACAD:3::1
```

```
Serial10/0/1            [administratively down/down]
```

```
unassigned
```

```
R1#
```

Statically configured link-local addresses




IPv6 Global Unicast Addresses

Verifying IPv6 Address Configuration

Each interface has two IPv6 addresses -

1. global unicast address that was configured
2. one that begins with FE80 is automatically added link-local unicast address

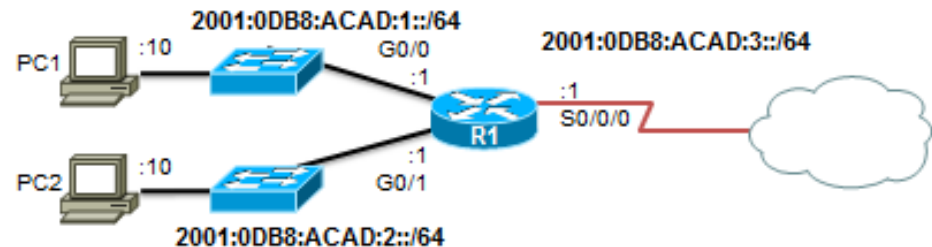

```
R1#show ipv6 interface brief
GigabitEthernet0/0    [up/up]
FE80::FE99:47FF:FE75:C3E0
2001:DB8:ACAD:1::1
GigabitEthernet0/1    [up/up]
FE80::FE99:47FF:FE75:C3E1
2001:DB8:ACAD:2::1
Serial0/0/0           [up/up]
FE80::FE99:47FF:FE75:C3E0
2001:DB8:ACAD:3::1
Serial0/0/1           [administratively down/down]
unassigned
R1#
```



IPv6 Global Unicast Addresses

Verifying IPv6 Address Configuration

```
R1#show ipv6 route
IPv6 Routing Table - default - 7 entries
Codes: C - Connected, L - Local, S - Static, U - Per-user Static

<output omitted>

C   2001:DB8:ACAD:1::/64 [0/0]
    via GigabitEthernet0/0, directly connected
L   2001:DB8:ACAD:1::1/128 [0/0]
    via GigabitEthernet0/0, receive
C   2001:DB8:ACAD:2::/64 [0/0]
    via GigabitEthernet0/1, directly connected
L   2001:DB8:ACAD:2::1/128 [0/0]
    via GigabitEthernet0/1, receive
C   2001:DB8:ACAD:3::/64 [0/0]
    via Serial0/0/0, directly connected
L   2001:DB8:ACAD:3::1/128 [0/0]
    via Serial0/0/0, receive
L   FF00::/8 [0/0]
    via Null0, receive
R1#
```



IPv6 Multicast Addresses

Assigned IPv6 Multicast Addresses

- IPv6 multicast addresses have the prefix FFxx::/8
- There are two types of IPv6 multicast addresses:
 - Assigned multicast
 - Solicited node multicast



IPv6 Multicast Addresses

Assigned IPv6 Multicast Addresses

Two common IPv6 assigned multicast groups include:


- **FF02::1 All-nodes multicast group** –
 - all IPv6-enabled devices join
 - same effect as an IPv4 broadcast address
- **FF02::2 All-routers multicast group** –
 - all IPv6 routers join
 - a router becomes a member of this group when it is enabled as an IPv6 router with **the ipv6 unicast-routing** global configuration command
 - a packet sent to this group is received and processed by all IPv6 routers on the link or network.



IPv6 Multicast Addresses

Assigned IPv6 Multicast Addresses

IPv6 All-nodes Multicast Communications

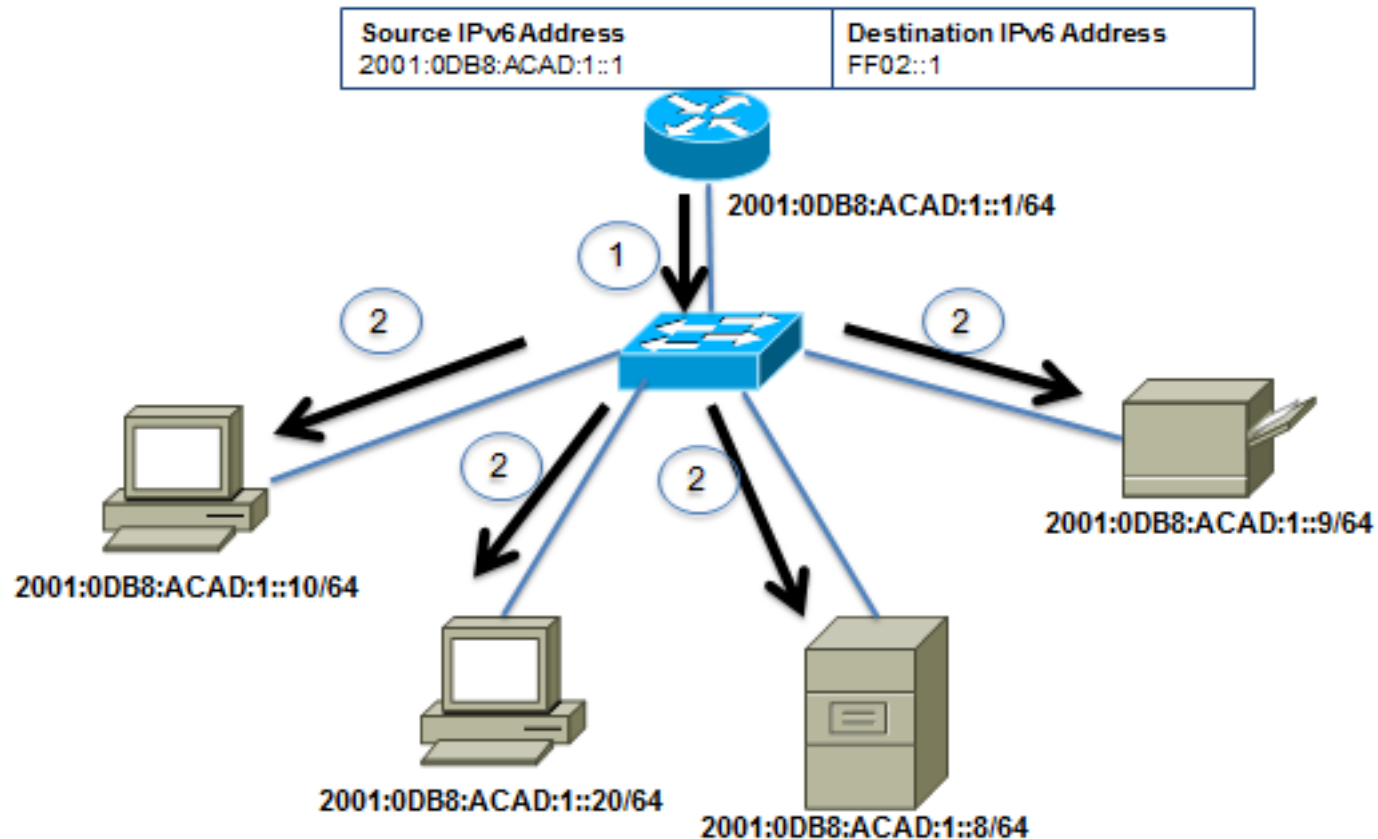




IPv6 Multicast Addresses

Solicited Node IPv6 Multicast Addresses

- Similar to the all-nodes multicast address, matches only the last 24 bits of the IPv6 global unicast address of a device

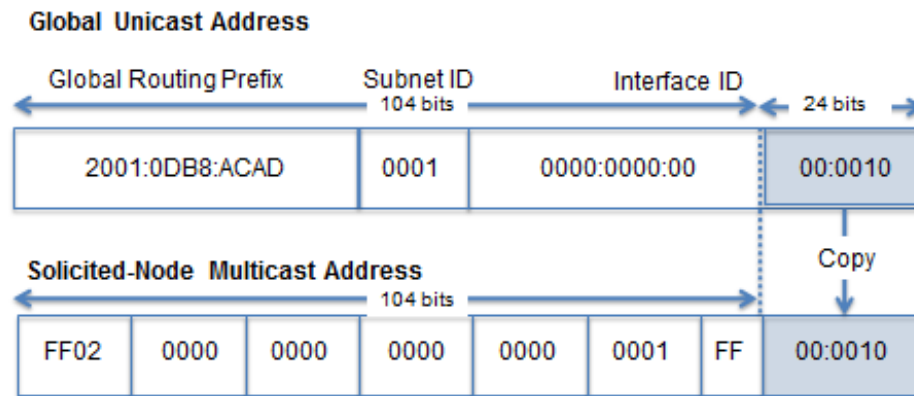

IPv6 Global Unicast Address: 2001:0DB8:ACAD:0001:0000:0000:0000:0010

IPv6 Solicited Node Multicast Address: FF02::1:FF00:0010


- Automatically created when the global unicast or link-local unicast addresses are assigned
- Created by combining a special FF02:0:0:0:0:FF00::/104 prefix with the right-most 24 bits of its unicast address.



IPv6 Multicast Addresses

Solicited Node IPv6 Multicast Addresses

- The solicited node multicast address consists of two parts:
- **FF02:0:0:0:0:FF00::/104 multicast prefix** - first 104 bits of the all solicited node multicast address
- **Least significant 24-bits** – copied from the right-most 24 bits of the global unicast or link-local unicast address of the device

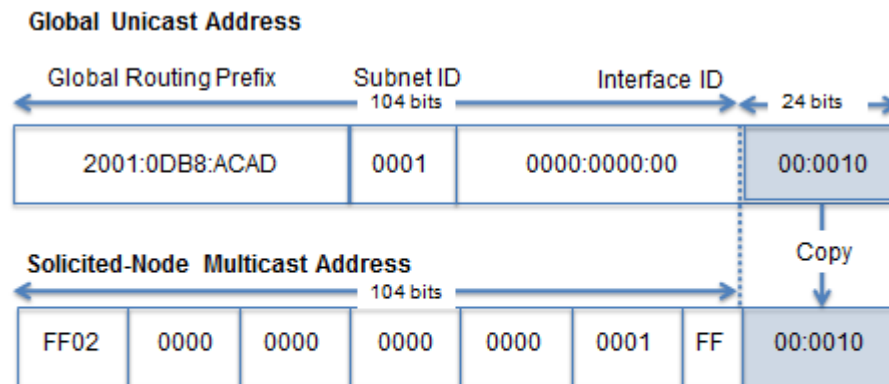

IPv6 Global Unicast Address: 2001:0DB8:ACAD:0001:0000:0000:0000:000010

IPv6 Solicited Node Multicast Address: FF02::1:FF00:0010



8.3 Connectivity Verification



ICMP

ICMPv4 and ICMPv6 Messages

- ICMP messages common to both ICMPv4 and ICMPv6 include:
 - Host confirmation
 - Destination or Service Unreachable
 - Time exceeded
 - Route redirection
- Although IP is not a reliable protocol, the TCP/IP suite does provide for messages to be sent in the event of certain errors, sent using the services of ICMP



ICMP


ICMPv6 Router Solicitation and Router Advertisement Messages

- ICMPv6 includes four new protocols as part of the Neighbor Discovery Protocol (ND or NDP):
 - Router Solicitation message
 - Router Advertisement message
 - Neighbor Solicitation message
 - Neighbor Advertisement message
- **Router Solicitation and Router Advertisement Message:** Sent between hosts and routers.
- **Router Solicitation (RS) message:** RS message is sent as an IPv6 all-routers multicast message
- **Router Advertisement (RA) message:** RA messages are sent by routers to provide addressing information



ICMP

ICMPv6 Router Solicitation and Router Advertisement Messages

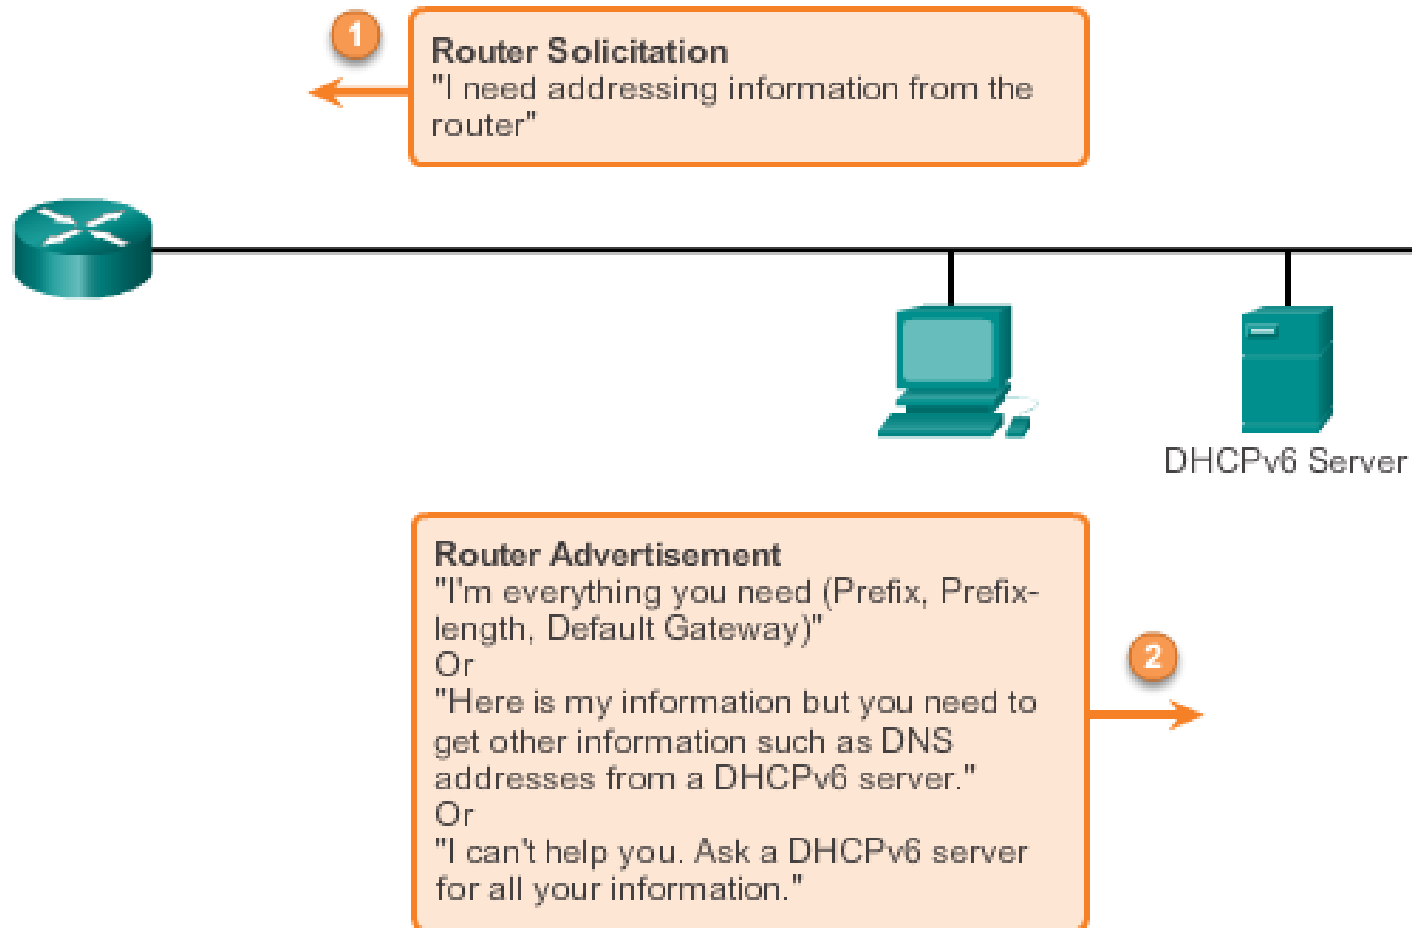



ICMP

ICMPv6 Neighbor Solicitation and Neighbor Advertisement Messages

Two additional message types

- Neighbor Solicitation (NS)
- Neighbor Advertisement (NA) messages

Used for:

- Address resolution
 - Used when a device on the LAN knows the IPv6 unicast address of a destination but does not know its Ethernet MAC address
- Duplicate Address Detection (DAD)
 - Performed on the address to ensure that it is unique
 - The device will send a NS message with its own IPv6 address as the targeted IPv6 address



ICMP


ICMPv6 Neighbor Solicitation and Neighbor Advertisement Messages

ICMPv6 Neighbor Discovery Protocol

Address Resolution

To: FF02:0:0:0:0:FF00::20

I need the Ethernet MAC address of the device that has this unicast address.
Target IPv6 Address: 2001:DB8:ACAD:1::20

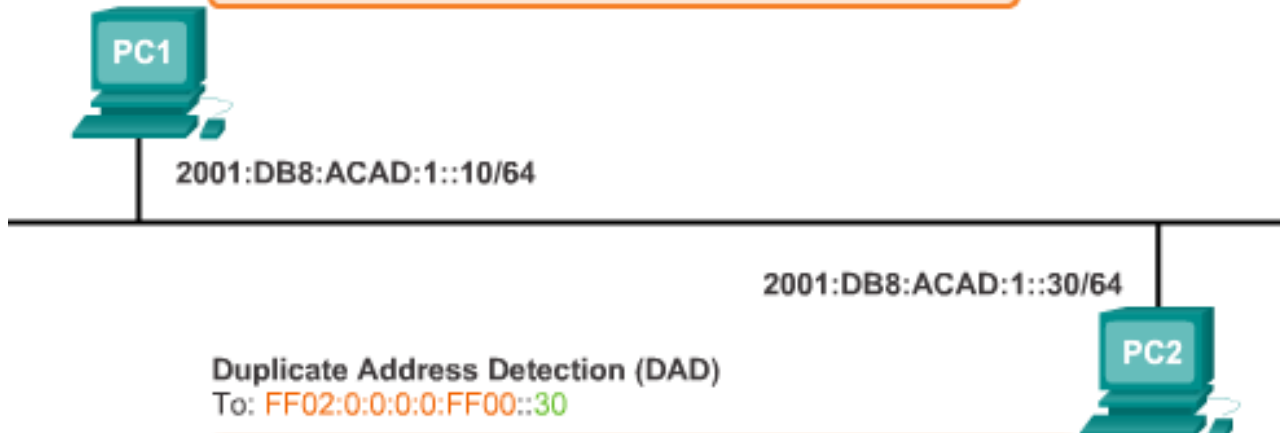

Duplicate Address Detection (DAD)

To: FF02:0:0:0:0:FF00::30

Before I use this address is anyone else on this link using this global unicast address?
Target IPv6 Address: 2001:DB8:ACAD:1::30




Testing and Verification

Ping - Testing the Local Stack


Testing Local TCP/IP Stack

Pinging the local host confirms that TCP/IP is installed and working on the local host.



C:\>ping 127.0.0.1

Pinging 127.0.0.1 causes a device to ping itself.

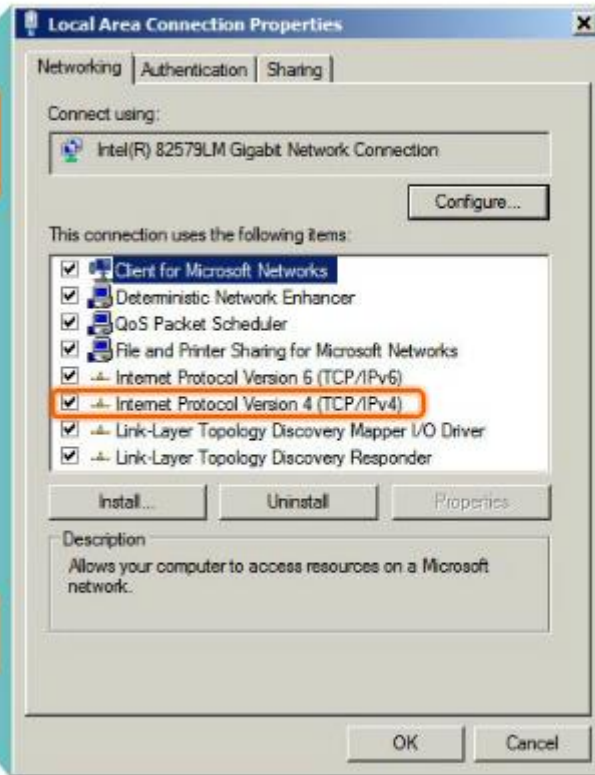




Testing and Verification

Ping – Testing Connectivity to the Local LAN

Testing IPv4 Connectivity to Local Network

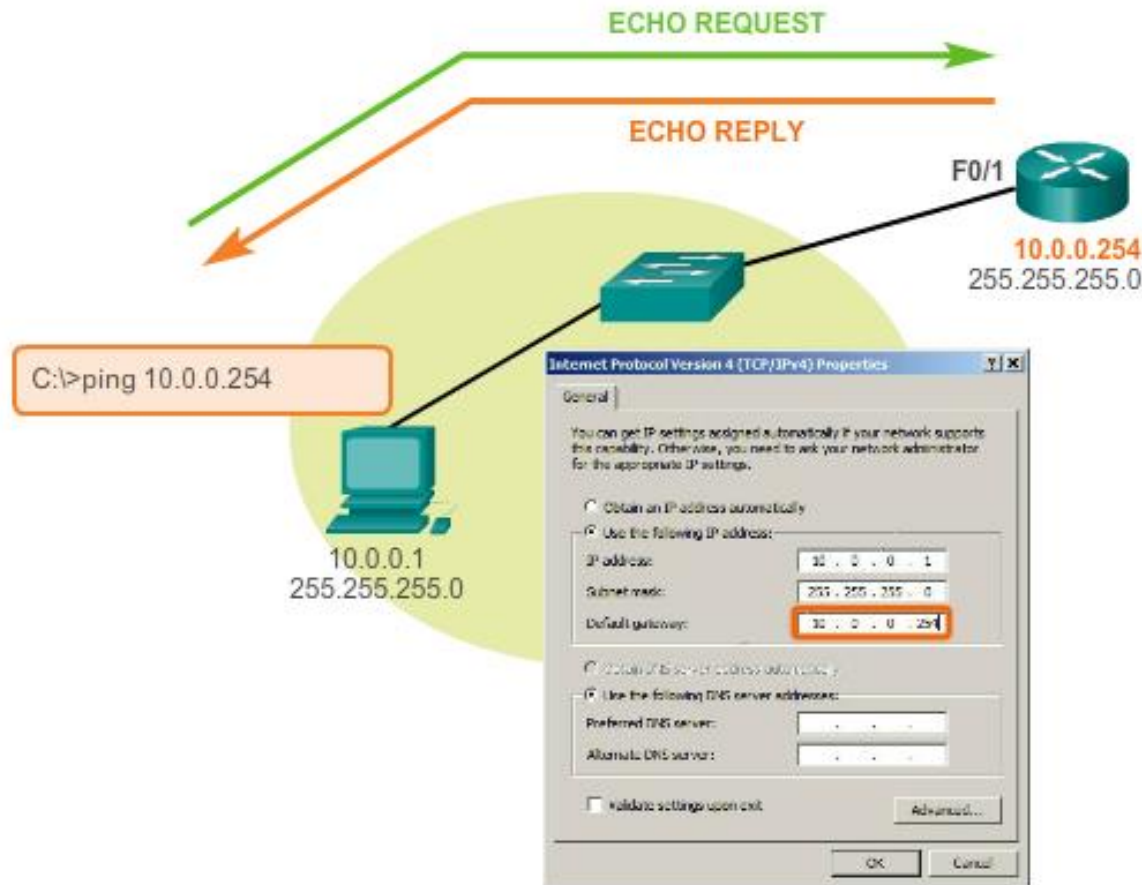




Testing and Verification

Ping – Testing Connectivity to Remote

Testing Connectivity to Remote LAN Ping to a Remote Host

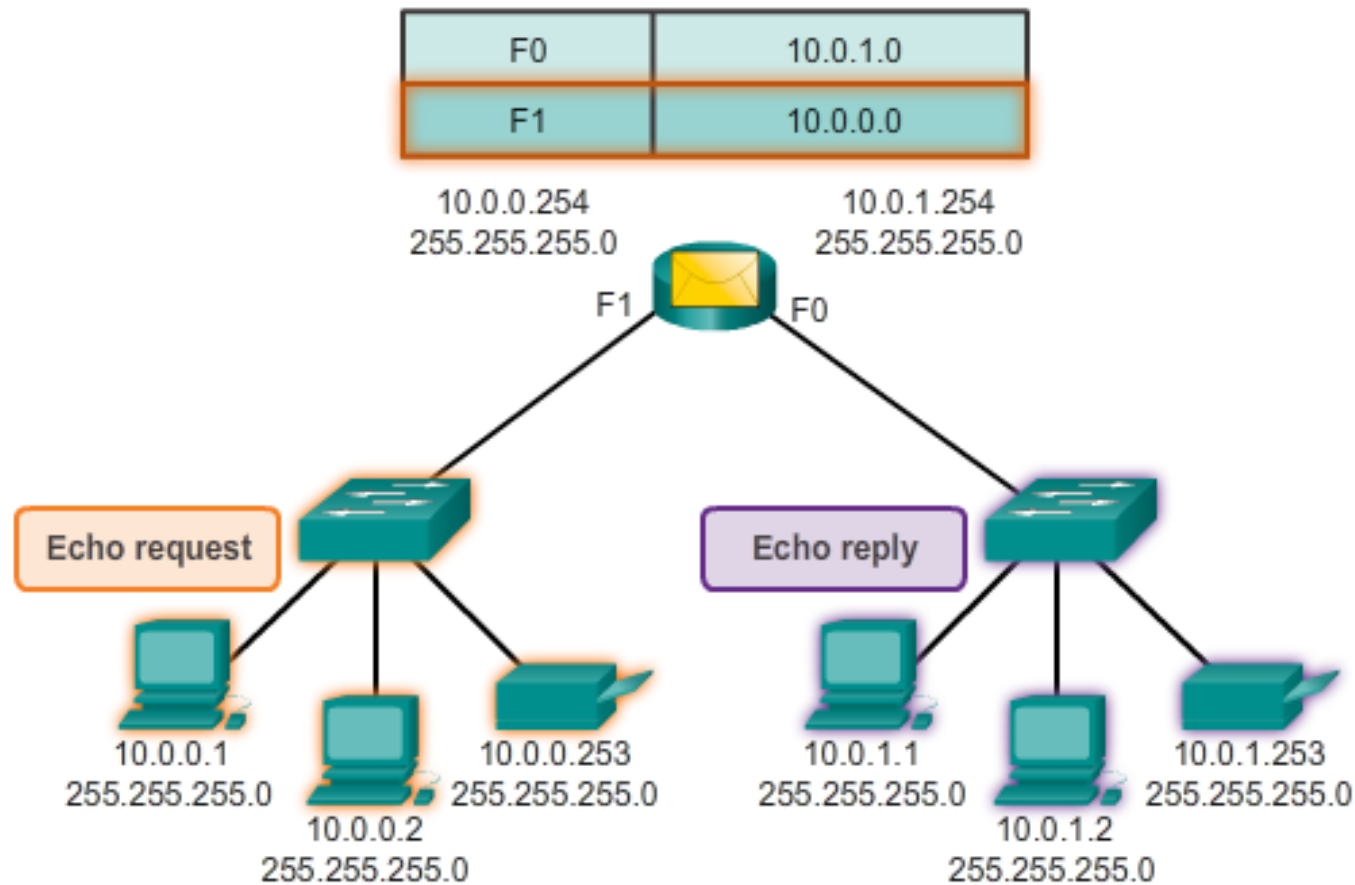



Testing and Verification

Traceroute – Testing the Path

Traceroute (tracert)

- Generates a list of hops that were successfully reached along the path
- Provides important verification and troubleshooting information
- If the data reaches the destination, then the trace lists the interface of every router in the path between the hosts
- If the data fails at some hop along the way, the address of the last router that responded to the trace can provide an indication of where the problem or security restrictions are found
- Provides round trip time for each hop along the path and indicates if a hop fails to respond



IP Addressing Summary

- IP addresses are hierarchical with network, subnetwork, and host portions. An IP address can represent a complete network, a specific host, or the broadcast address of the network.
- The subnet mask or prefix is used to determine the network portion of an IP address. Once implemented, an IP network needs to be tested to verify its connectivity and operational performance.
- DHCP enables the automatic assignment of addressing information such as IP address, subnet mask, default gateway, and other configuration information.



IP Addressing Summary

- IPv4 hosts can communicate one of three different ways: unicast, broadcast, and multicast.
- The private IPv4 address blocks are: 10.0.0.0/8, 172.16.0.0/12, and 192.168.0.0/16.
- The depletion of IPv4 address space is the motivating factor for moving to IPv6. Each IPv6 address has 128 bits verses the 32 bits in an IPv4 address. The prefix length is used to indicate the network portion of an IPv6 address using the following format: IPv6 address/prefix length.



IP Addressing Summary

- There are three types of IPv6 addresses: unicast, multicast, and anycast.
- An IPv6 link-local address enables a device to communicate with other IPv6-enabled devices on the same link and only on that link (subnet). Packets with a source or destination link-local address cannot be routed beyond the link from where the packet originated. IPv6 link-local addresses are in the FE80::/10 range.
- ICMP is available for both IPv4 and IPv6.

Cisco | Networking Academy[®]

Mind Wide Open[™]