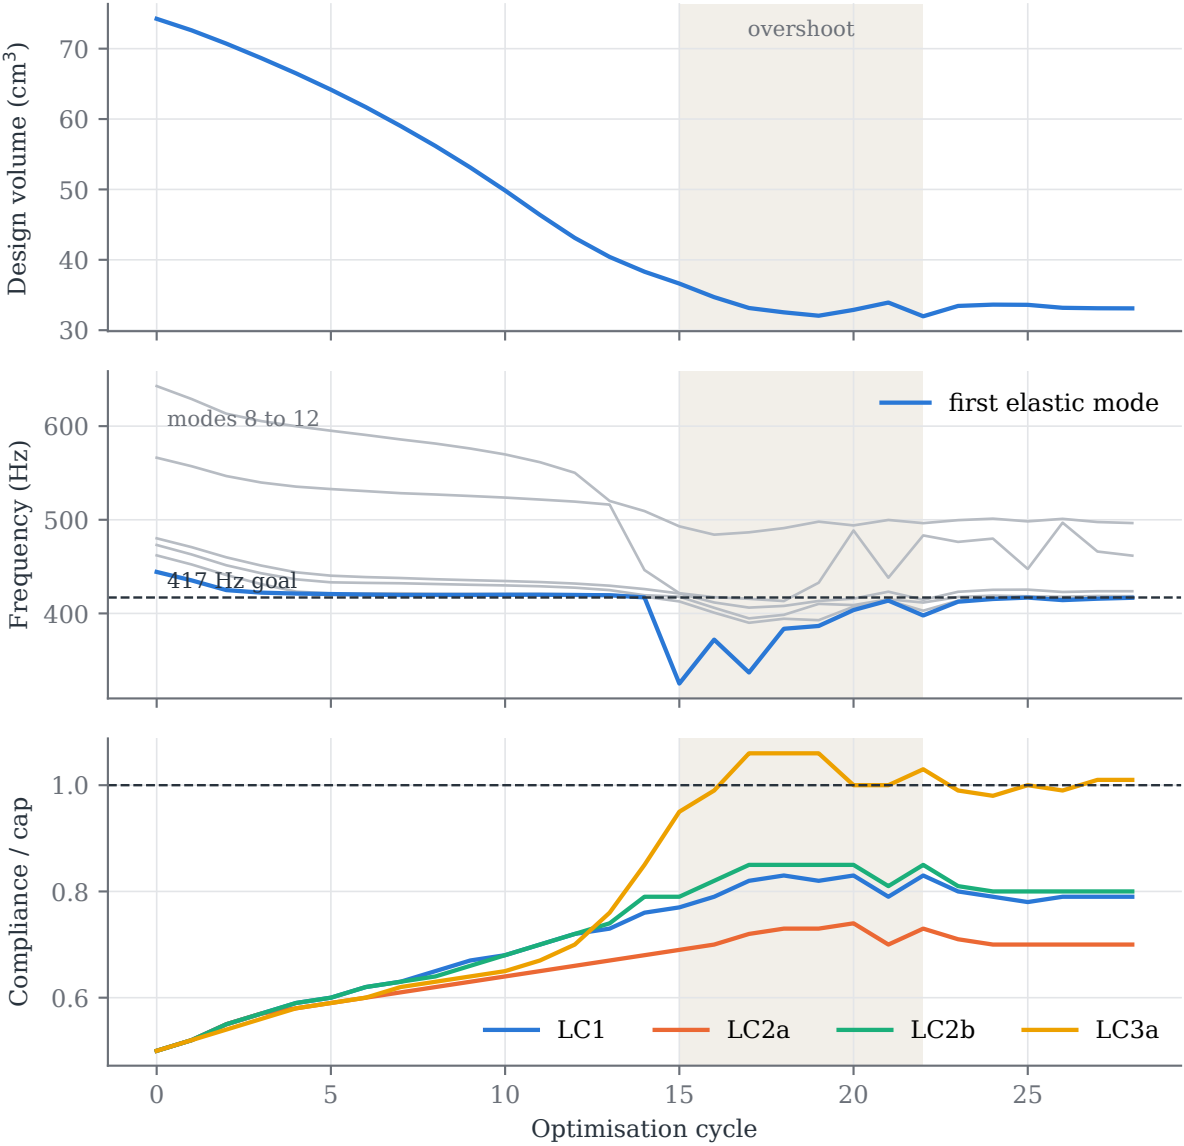
overshoot
Design volume (cm³)
70
60
50
40
30
modes 8 to 12
first elastic mode
Frequency (Hz)
600
500
400
417 Hz goal
Compliance / cap
1.0
0.8
0.6
LC1
LC2a
LC2b
LC3a
0
5
10
15
20
25
Optimisation cycle