


(a)

DW position	Site	Protocol	t_{tr} opt.	Fidelity
Center ($\sim 1/2$)	DW=11	Standard ($\sin^2$, $t_{\text{prep}}=15$)	420.0	0.6368
Center ($\sim 1/2$)	DW=11	Ramp-shaping ($\alpha=2$, $t_{\text{prep}}=10$)	410.0	0.6099
Center ($\sim 1/2$)	DW=11	Global $\sin^2$ ramp	530.0	0.6089
Third ($\sim 1/3$)	DW=7	Standard ($\sin^2$, $t_{\text{prep}}=15$)	95.0	0.0606
Third ($\sim 1/3$)	DW=7	Ramp-shaping ($\alpha=2$, $t_{\text{prep}}=10$)	380.0	0.0597
Third ($\sim 1/3$)	DW=7	Global $\sin^2$ ramp	270.0	0.0474
Quarter ($\sim 1/4$)	DW=5	Standard ($\sin^2$, $t_{\text{prep}}=15$)	495.0	0.0040
Quarter ($\sim 1/4$)	DW=5	Ramp-shaping ($\alpha=2$, $t_{\text{prep}}=10$)	200.0	0.0047
Quarter ($\sim 1/4$)	DW=5	Global $\sin^2$ ramp	120.0	0.0025

(b)

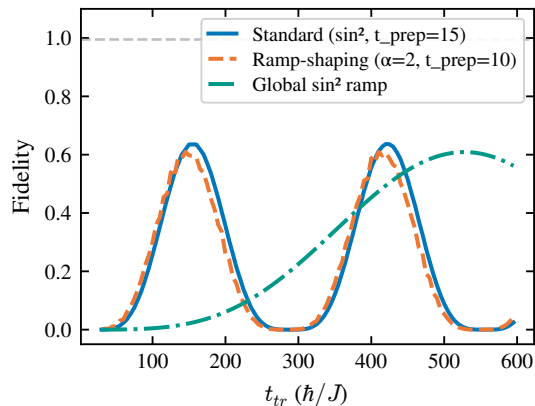

(c)

