



StarFive  
赛昉科技

# **VisionFive 2 Product Brief**

Version: 1.3.1

Date: 2023/07/18

Doc ID: VisionFive2-PBEN-001

# Legal Statements

Important legal notice before reading this documentation.

## PROPRIETARY NOTICE

Copyright©Shanghai StarFive Technology Co., Ltd., 2023. All rights reserved.

Information in this document is provided "as is," with all faults. Contents may be periodically updated or revised due to the product development. Shanghai StarFive Technology Co., Ltd.(hereinafter "StarFive") reserves the right to make changes without further notice to any products herein.

StarFive expressly disclaims all warranties, representations, and conditions of any kind, whether express or implied, including, but not limited to, the implied warranties or conditions of merchantability, fitness for a particular purpose and non-infringement.

StarFive does not assume any liability rising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation indirect, incidental, special, exemplary, or consequential damages.

All material appearing in this document is protected by copyright and is the property of StarFive. You may use this document or any part of the document for internal or educational purposes only, provided you do not modify, edit or take out of context the information in this document in any manner. Information contained in this document may be used, at your sole risk, for any purposes. StarFive authorizes you to copy this document, provided that you retain all copyright and other proprietary notices contained in the original materials on any copies of the materials and that you comply strictly with these terms. This copyright permission does not constitute an endorsement of the products or services.

## Contact Us

Address: Room 502, Building 2, No. 61 Shengxia Rd., China (Shanghai) Pilot Free Trade Zone, Shanghai, 201203, China Room 502, Building 2, No. 61 Shengxia Rd., China (Shanghai) Pilot Free Trade Zone, Shanghai, 201203, China

Website: <http://www.starfivetech.com> <http://www.starfivetech.com>

Email: [sales@starfivetech.com](mailto:sales@starfivetech.com)(sales) , [support@starfivetech.com](mailto:support@starfivetech.com)(support)

# Preface

About this guide and technical support information.

## About this document

This document mainly provides the users with the features and technical specifications for StarFive VisionFive 2 Single Board Computer (SBC).



## Revision History




Table 0-1 Revision History

Version	Released	Revision
1.3.1	2023/07/18	Updated the description in <a href="#">Overview (on page 5)</a> .
1.3	2022/12/08	Updated the power requirement via USB-C port. Added a note on using spacers in <a href="#">Physical Specifications (on page 9)</a> . Updated the dimensions.
1.2	2022/10/20	<ul style="list-style-type: none"><li>• Revised the display of MIPI CSI.</li><li>• Updated the USB port description.</li><li>• Added 1 × USB device port.</li><li>• Updated the GPU description.</li><li>• Updated the Reset button description.</li></ul>
1.1	2022/09/08	<ul style="list-style-type: none"><li>• Updated the mechanical drawings.</li><li>• Updated the description about Reset button.</li></ul>
1.0	2022/08/23	The first release.

## Notes and notices

The following notes and notices might appear in this guide:


-  **Tip:**  
Suggests how to apply the information in a topic or step.
-  **Note:**  
Explains a special case or expands on an important point.

-  **Important:**  
Points out critical information concerning a topic or step.
-  **CAUTION:**  
Indicates that an action or step can cause loss of data, security problems, or performance issues.
-  **Warning:**  
Indicates that an action or step can result in physical harm or cause damage to hardware.



StarFive  
星方科技

# 1. Overview

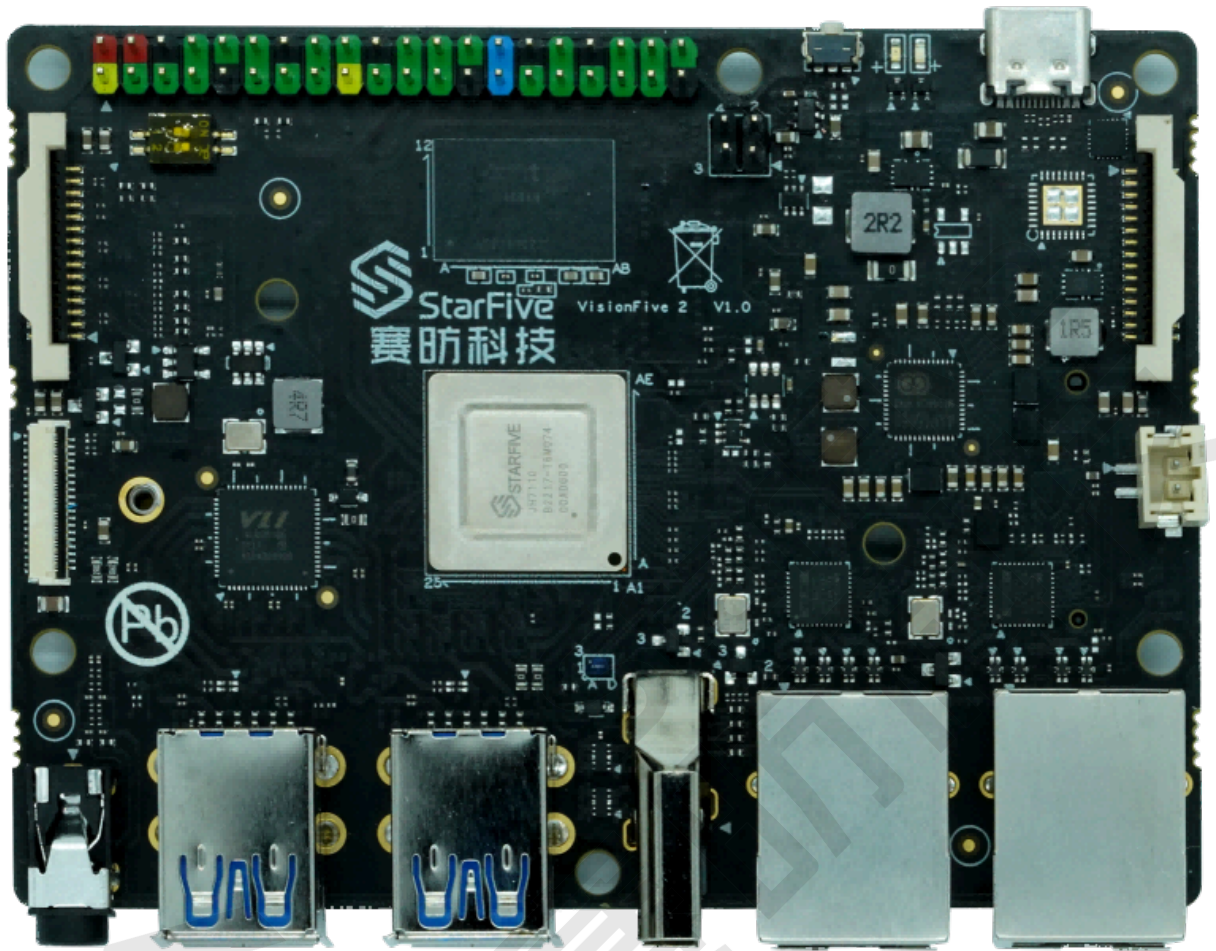


VisionFive 2 is the world's first high-performance RISC-V single board computer (SBC) with an integrated GPU. Compared with its last generation, VisionFive 2 has been fully upgraded with significant improvements in the processor work frequency, multimedia processing capabilities, scalability, etc. Its superior performance and reasonable price make VisionFive 2 the best affordable RISC-V development board ever.

VisionFive 2 boasts a quad-core 64-bit SoC with RV64GC ISA, running up to 1.5 GHz, and integrated with IMG BXE-4-32 MC1, supporting OpenCL 3.0, OpenGL ES 3.2, and Vulkan 1.2. VisionFive 2 available with 2/4/8 GB LPDDR4 RAM options, provides rich I/O peripherals such as M.2 connector, eMMC socket, USB 3.0 ports, a 40-pin GPIO header, Gigabit Ethernet ports, a TF card slot, and many more. It has onboard audio and video processing capabilities and has MIPI-CSI and MIPI-DSI connectors as multimedia peripherals. The open source SBC also provides wide software compatibility including support for Debian, Ubuntu, OpenSUSE, OpenKylin, OpenEuler, Deepin and other software running on these operating systems.

## 2. Specifications

VisionFive 2 has the following specifications.

Type	Item	Description
Processor	StarFive JH-7110	StarFive JH-7110 with RISC-V quad-core CPU with 2 MB L2 cache and a monitor core, supporting RV64GC ISA, working up to 1.5 GHz
	Imagination GPU	IMG BXE-4-32 MC1 with work frequency up to 600 MHz
Memory	2 GB/4 GB/8 GB	LPDDR4 SDRAM, up to 2,800 Mbps
Storage	Onboard TF card slot	VisionFive 2 can boot from a TF card.
	Flash	The firmware to store U-Boot and BootLoader.
Multimedia	Video Output	<ul style="list-style-type: none"><li>• 1 × 2-lane MIPI DSI display port, supporting up to 1080p@30fps</li><li>• 1 × 4-lane MIPI DSI display port, supporting up to 2K@30fps in both single display and dual display modes.</li><li>• 1 × HDMI 2.0, supporting up to 4K@30fps or 2K@60fps</li></ul> <div> <b>Note:</b> Only one MIPI DSI port can be used for display at a time.</div>
	Camera	1 × 2-lane MIPI CSI camera port, supporting up to 1080p@30fps
	Encoder/Decoder	<ul style="list-style-type: none"><li>• Video decoder supports up to 4K@60fps and multi-stream for H264/H265;</li><li>• Video encoder supports up to 1080p@30fps and multi-stream for H265;</li><li>• JPEG encoder/decoder</li></ul>
	Audio	4-pole stereo audio jack
Connectivity	Ethernet	2 × RJ45 Gigabit Ethernet ports
	USB Host	4 × USB 3.0 ports (multiplexed with a PCIe 2.0 1x lane).

Type	Item	Description
	USB Device	1 × USB device port (by reusing the USB-C port)
	M.2 Connector	M.2 M-Key
	eMMC Socket	For eMMC module as OS and data storage.
	2-Pin Fan Header	-
Power	USB-C port	5 V DC via USB-C with PD, up to 30 W (minimum 3 A)
	GPIO Power In	5 V DC via GPIO heade (minimum 3 A)
	PoE (Power over Ethernet)	Power function is enabled and requires separate PoE HAT
GPIO	40-Pin GPIO Header	<p>1 × 40-pin GPIO header, supporting various interface options:</p> <ul style="list-style-type: none"> <li>• 3.3 V (on 2 pins)</li> <li>• 5 V (on 2 pins)</li> <li>• Ground (on 8 pins)</li> <li>• GPIO</li> <li>• CAN bus</li> <li>• DMIC</li> <li>• I2C</li> <li>• I2S</li> <li>• PWM</li> <li>• SPI</li> <li>• UART</li> <li>• and so on</li> </ul>
Boot Mode	Boot mode setting pins	<p>You can choose one of the following boot modes:</p> <ul style="list-style-type: none"> <li>• 1-bit QSPI Nor Flash</li> <li>• SDIO3.0</li> <li>• eMMC</li> <li>• UART</li> </ul>

Type	Item	Description
Button	Reset button	To reset VisionFive 2, press and hold the Reset button for more than 3 seconds to ensure the reset is successful.
Dimensions	100 × 74 mm	-
Compliance	RoHS, FCC, CE	-
Environment	Recommended operating temperature	0-50 °C
Other	Debug function	UART TX and UART RX are available through the 40-pin GPIO header.



### 3. Physical Specifications

Figure 3-1 VisionFive 2 Mechanical Drawing (Top View)


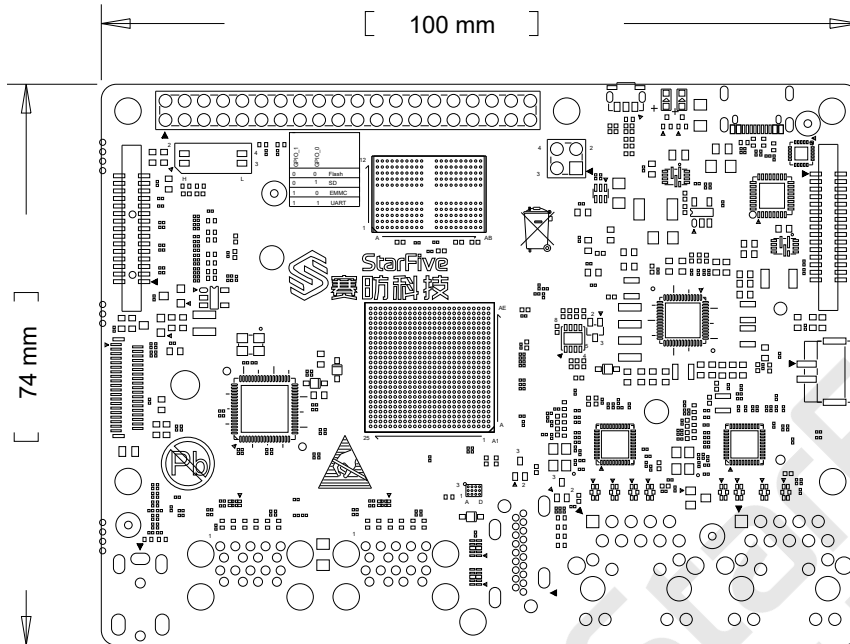


Figure 3-2 VisionFive 2 Mechanical Drawing (Bottom View)

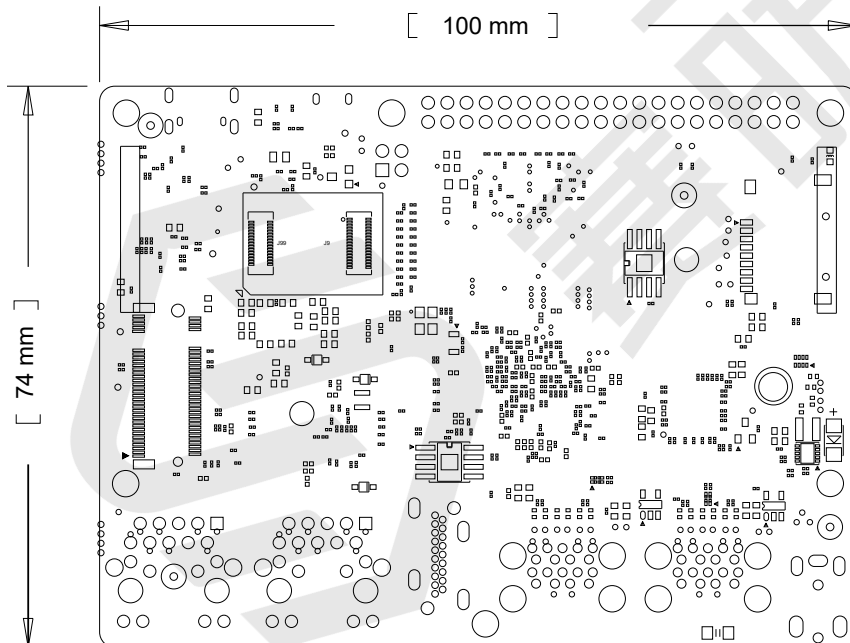


**Warning:**

During the use of VisionFive 2, avoid contact with hard objects that may cause damage. Thus, StarFive recommends that you use spacers for the following NPTHs (Non Plating Through Hole):



**Figure 3-3 NPTHs on VisionFive 2**

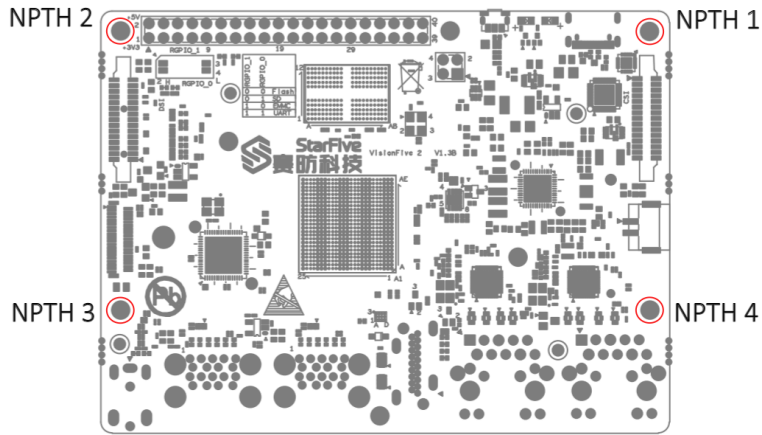

For spacers, StarFive strongly recommends that you use the copper columns or studs with the following specifications:

- Single head hexagonal copper columns (Size: M2.5\*10+6mm)

**Figure 3-4 Single head hexagonal copper columns**



- Double way hexagon copper studs (Size: M2.5\*4)

**Figure 3-5 Double way hexagon copper studs**

