


Motor with integrated radio receiver for awnings

## Simplified programming procedure

### 1) PRE-REGISTER THE REMOTE CONTROL



Power the engine.

Press simultaneously and until the curtain moves up and down.




### 2) REVERSE THE DIRECTION OF ROTATION



Check the direction of rotation by acting on and .

If the direction is not correct, press **Stop** ) until the (curtain moves up and down.



### 3) ADJUST THE LIMIT SWITCHES



#### High end of stroke

By pressing , bring the awning to the upper limit stop and then press and **Stop** ( ) at the same time until the curtain moves.



#### Low end of stroke

Once the desired lower limit switch is reached, press **Stop** ( ) and then press and **Stop** ( ) until the awning moves, reaching the upper limit switch.




#### End of stroke storage

Once the upper limit switch is reached, press **Stop** ( ) until the awning moves up and down.



## 4) STORE THE RTS TRANSMITTER



Press the **Prog** button until the awning moves up and down.



## 5) RESET THE OPERATOR MEMORY



a) Motor powered. b)

Remove power for 2 sec.

c) Reconnect power for 10

seconds. d) Remove power for 2

seconds. e) Reconnect power. The awning will move for 5 seconds, then stop.

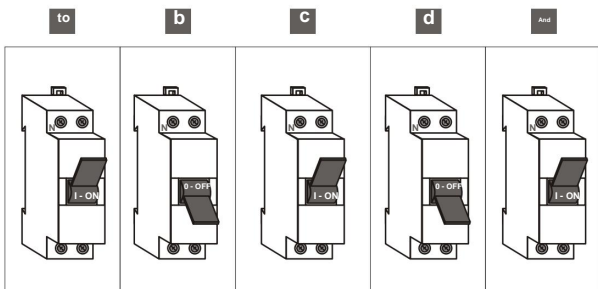

Press the **Prog** button until the awning moves up and down **2 times**.



The operator's memory is completely empty.



Somfy declares that the device complies with the essential requirements and other provisions of Directive 1999/5/EC. The declaration of conformity is available upon request.  
Usable in EU, CH