


In-network vs point-to-point ring AllReduce vs message size — single-switch scale-up crossbar (radix= $|G|$)
on the multi-domain simulator; 3600 Gbps/port, 500 ns link + 300 ns switch; INC charged 100 ns in-switch reduce

Completion: INC (solid) vs ring (dashed)



INC speedup vs message size

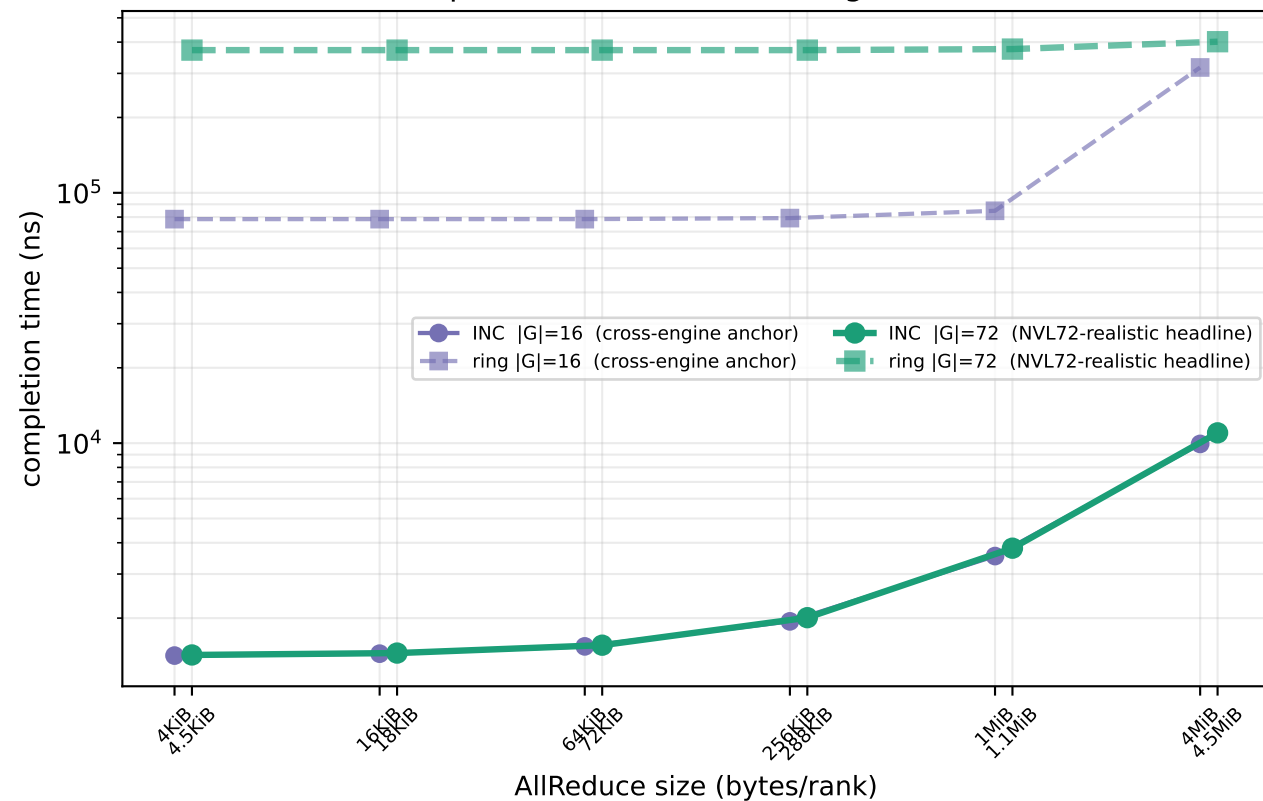