


In-network vs point-to-point AllReduce vs payload on the multi-domain simulator ($|G| = 72$)
single-switch radix-72 scale-up crossbar, lossless_input PFC, 3600 Gbps/port, fabric-rate NIC injection; INC charged 100 ns reduce; ideal ring at the realised 492.3 B/ns

Completion time vs payload



Convergence to the traffic bound

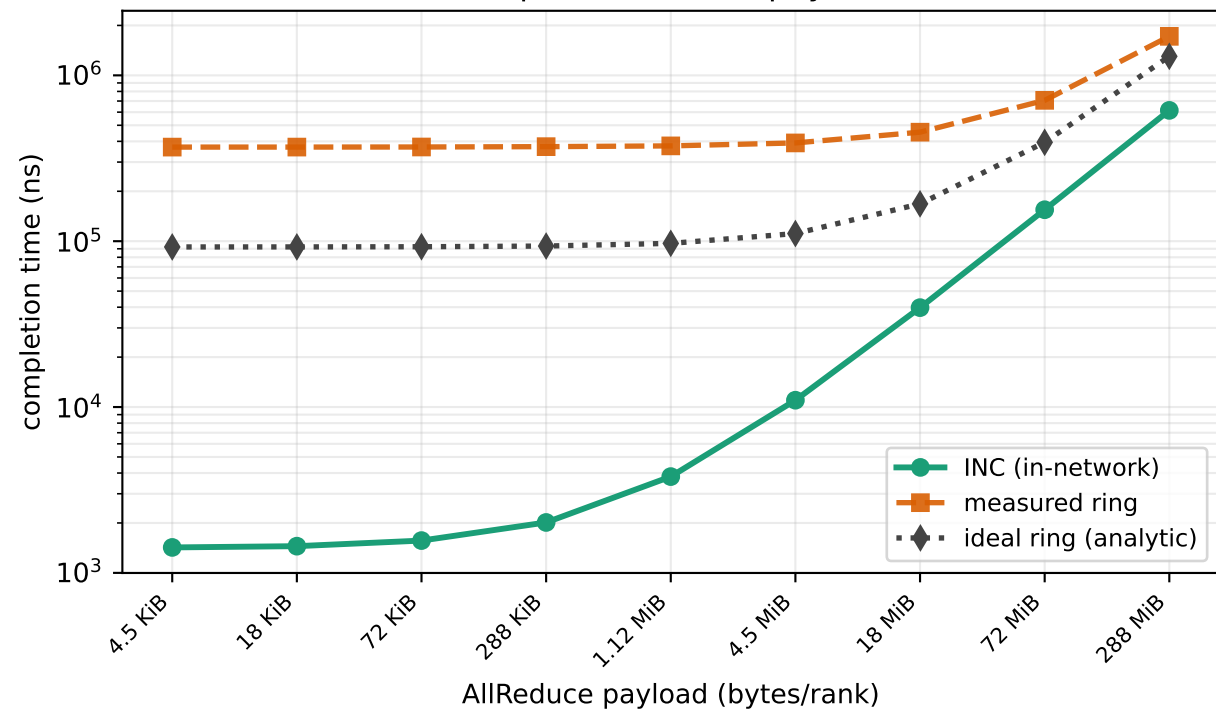