


M1 — Per-pixel conversion-gain selection (dual conversion gain, DCG)

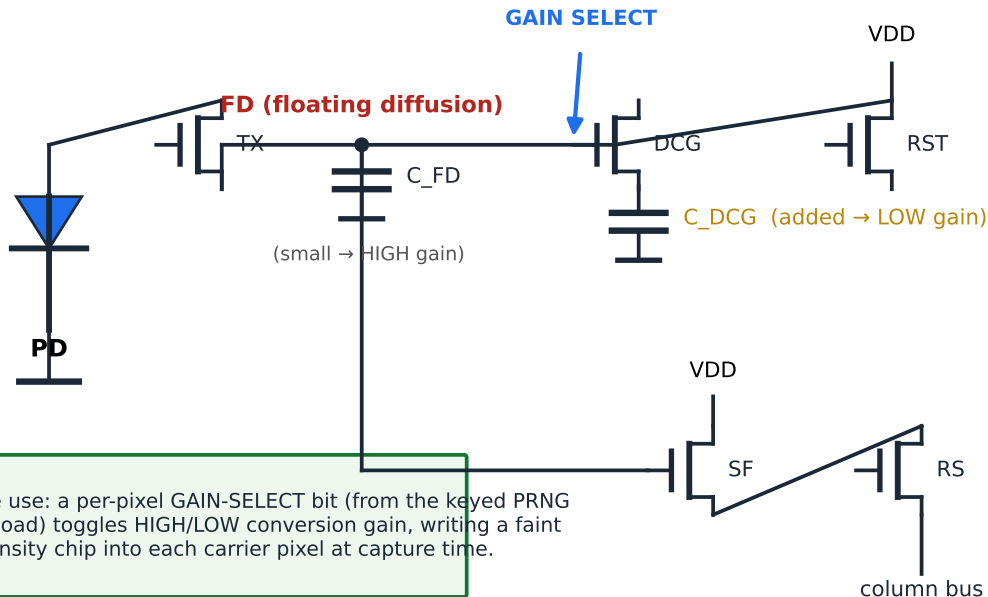

Provenance use: a per-pixel GAIN-SELECT bit (from the keyed PRNG of the payload) toggles HIGH/LOW conversion gain, writing a faint intensity chip into each carrier pixel at capture time.