



PRODUCT
DATASHEET '24

ADVANCE ANALYTIK

REVOLUTIONIZING ONLINE MONITORING SOLUTIONS



Viz Eco Duo **Dual Channel Transmitter**

www.advanceanalytik.com
sales@advanceanalytik.com

Viz Eco Duo

Dual Channel Transmitter

The Viz-Eco-Duo Parameter Transmitter is an advanced solution for simultaneous monitoring of diverse parameters, catering to a wide range of customer requirements. Compatible with multiple different sensors such as pH, DO, ORP, conductivity, turbidity, SS, COD, BOD, TOC, TSS, Nitrate, Nitrite, Color, Sludge Level, ISE and others, this device offers versatility for a wide range of applications. Designed for applications in water quality monitoring across wastewater treatment plants, waterworks, water stations, surface water, and industrial settings, this versatile transmitter brings unparalleled flexibility and ease of use to the field. With support for up to 2 sensors, various data transmission options, and a user-friendly interface, the Viz-Eco-Duo ensures efficient integration, reduced operational costs, and reliable parameter monitoring.



Product Features

- Enables plug-and-play sensor functionality with fast and convenient electrode installation and replacement.
- Easy to operate with reliable results and intuitive interface instructions to minimize operational errors.
- LCD screen with a user-friendly navigation menu and rich, comprehensive interface content.
- Multiple data output options, including 4-20mA and MODBUS RS485.
- Automatic error and alarm notifications with signal upload capabilities.
- Versatile transmitter supports wall, panel, pipe, or pole installation.
- Features include real-time display, data storage, and historical data viewing.

Parameter Specification of VIZ Eco Series Transmitter

PARAMETER	RANGE (Other ranges available on request)
pH	0-14 pH
Conductivity	0-20 mS/cm
ORP	+/-2000 mV
Dissolved Oxygen	0-20 mg/l or 0-200% saturation
TDS	0-20000 ppm
Turbidity	0.01-4000 NTU
Suspended Solids/Sludge	0.01 - 20000 mg/L
Chlorophyll	0-500 ug/L
Blue Green Algae	0-300000 cells/mL
Oil in Water	0-50 ppm
Ammonia Nitrogen (NH ₄ N)	0.1-3000 mg/L NH ₄ N
Nitrate Nitrogen (NO ₃ N)	0-3000 mg/L NO ₃ N
Residual Chlorine	0-20 mg/L
UV Visible Measurement	COD : 0-1500 mg/L
	BOD : 0-1000 mg/L
	TSS : 0-1000 mg/L
	TOC : 0-1000 mg/L
	(Other parameters available on request)
Temperature	0-80°C
ISE	Ammonia (NH ₃) : 0.01 - 17,000 ppm as NH ₃
	Cyanide (CN ⁻) : 0.2 - 260 ppm
	Fluoride (F ⁻) : 0.02 - 19000 ppm
	Sodium (Na ⁺) : 0.01 - 100,000 ppm
	Chloride (Cl ⁻) : 1.8 - 35,000 ppm
	Water Hardness (Ca ²⁺ / Mg ²⁺) : 0.5 - 40,000 ppm
	(Other ISE available on request)

Parts Reference

Viz Eco Duo

Dual Channel Universal Controller

Display: 128*64 Graphic Dot matrix LCD with LED strong backlight, can be operated in direct sunlight

Main material: Glass-filled nylon synthetic polyamide thermoplastic (top cover); Aluminum powder dusting (lower shell)

Output: 2 x 4-20mA analog output

Relay: Two relays SPDT contact

Communication protocol: Equipped with MODBUS RS485 communication function

Power supply: AC power supply: 80 - 265 VAC (50/60Hz); DC power supply: 9-36VDC

Enclosure: IP65/Nema4x

Dimensions: 145*125*162mm(L*W*H)

Mounting lugs for wall

Memory: 16 GB Memory Card Slot (Stores 1 Year measurement Data)

Depending upon measurement cycle frequency.

Memory card can be made available upon request

ORDERING CODE	DESCRIPTION
VizSens-TurbLo	Low Turbidity Sensor Range: 0.001 - 100 NTU Cable Length - Standard 3m (Maximum can be extended to 30m)
VizSens-NO3N	Nitrate Nitrogen Sensor Range: 0-3000 mg/L NO3N Cable Length - Standard 5m (Maximum can be extended to 100m)
VizSens-NH4N	Ammonia Nitrogen Sensor Range: 0.1-3000 mg/L NH4N Cable Length - Standard 5m (Maximum can be extended to 100m)
VizSens-OIW	Oil in Water Sensor Range: 0-50 ppm Cable Length - Standard 10m (Maximum can be extended to 50m)
VizSens-BGA	Blue Green Algae Sensor Range: 0-300000 cells/mL Cable Length - Standard 10m (Maximum can be extended to 100m)
VizSens-CPHL	Chlorophyll Sensor Range: 0-500 ug/L Cable Length - Standard 10m (Maximum can be extended to 100m)
VizSens-Turb	Optical Turbidity Sensor Range: 0.01 - 4000 NTU Cable Length - Standard 10m (Maximum can be extended to 100m)
VizSens-SS	Suspended Solids/Sludge Sensor Range: 0.01-20000 mg/L Cable Length - Standard 10m (Maximum can be extended to 100m)

ORDERING CODE	DESCRIPTION
VizSens-UV	COD Range: 0-1500 mg/L BOD Range: 0-1000 mg/L TSS Range: 0-1000 mg/L TOC Range: 0-1000 mg/L Cable Length - Standard 10m (Maximum can be extended to 100m)
VizSens-RCL	Residual Chlorine Sensor Range: 0-20 mg/L Cable Length - Standard 10m (Maximum can be extended to 100m)
VizSens-ODO	Optical DO Sensor Range: 0-20 mg/L or 0-200% saturation Cable Length - Standard 10m (Maximum can be extended to 100m)
VizSens-EC (Digital)	Digital Conductivity Sensor Range: 0-20 mS/cm Cable Length - Standard 10m (Maximum can be extended to 200m)
VizSens-EC (Analog)	Analog Conductivity Sensor Range: 0-20 mS/cm Cable Length - Standard 10m (Maximum can be extended to 20m)
VizSens-pH (Digital)	Digital pH Sensor Range : 0-14 pH Cable Length - Standard 10m (Maximum can be extended to 200m)
VizSens-pH (Analog)	Analog pH Sensor Range : 0-14 pH Cable Length - Standard 10m (Maximum can be extended to 20m)
VizSens-ORP (Analog)	Analog ORP Sensor Range: -/+ 2000 mV Cable Length - Standard 10m (Maximum can be extended to 20m)
VizSens-TDS (Analog)	Analog TDS Sensor Range: 0-20000 ppm Cable Length - Standard 10m (Maximum can be extended to 20m)
VizSens-ISE-NH3	Ammonia (NH3) Range: 0.01 - 17,000 ppm as NH3
VizSens-ISE-CN-	Cyanide (CN-) Range: 0.2 - 260 ppm
VizSens-ISE-F-	Fluoride (F-) Range : 0.02 - 19000 ppm
VizSens-ISE-Na+	Sodium (Na+) Range : 0.01 - 100,000 ppm
VizSens-ISE-Cl-	Chloride (Cl-) Range : 1.8 - 35,000 ppm
VizSens-ISE-Ca2+/Mg2+	Water Hardness (Ca2+ / Mg2+) Range : 0.5 - 40,000 ppm

Technical Specification of VIZ Eco Series Transmitter

Viz Eco Duo - Dual Channel Transmitter

INPUTS	Select any two Sensor (Digital/Analog/ISE) pH - Analog, Digital ORP - Analog, Digital Chlorine Sensor - Potentiometric/ISE Conductivity/Total Dissolved solids - Analog/Digital Dissolved Oxygen - Optical (Digital Type) Turbidity - Optical (Digital Type) Sludge Level - Optical (Digital Type) UV-VIS Sensor - Any One - COD,BOD,TOC,TSS,Nitrate,Nitrite,Color Total Suspended solids - IR Based Ion Selective Electrode - Analog
OUTPUTS	2 x 4-20mA active output (load of 500 ohm max)
RELAYS	2 x electromechanical SPDT (Form C) contact, 5 A Programmable individually for high or low alarm.
MEMORY	16 GB Memory Card Slot (Stores 1 Year measurement Data) Depending upon measurement cycle frequency. <i>*Memory card can be made available upon request*</i>
POWER SUPPLY	AC power supply: 80 - 265 VAC (50/60Hz); DC power supply: 9-36VDC
DISPLAY	128*64 dot matrix LCD with LED backlight
COMMUNICATION INTERFACE	Modbus RS485, 4-20mA
CERTIFICATIONS	IP65/NEMA4X
ENCLOSURE	Glass-filled nylon synthetic polyamide thermoplastic (top cover); Aluminum powder dusting (lower shell)
DIMENSIONS	145 x 125 x 162 mm L*W*H
WEIGHT	1.5Kg
OPERATING TEMPERATURE	-15 to 60°C






PRODUCT
DATASHEET '24

ADVANCE ANALYTIK

REVOLUTIONIZING ONLINE MONITORING SOLUTIONS

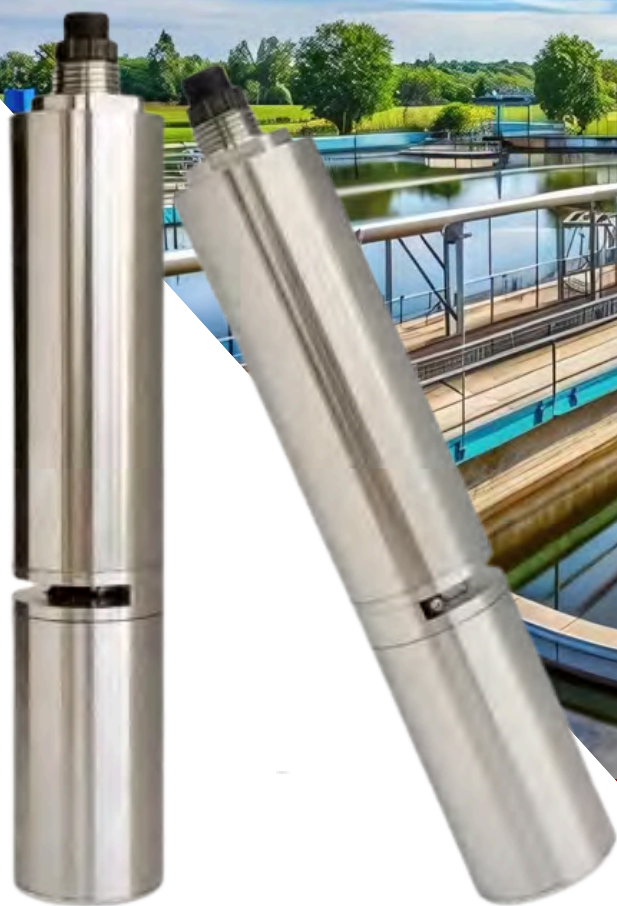

VizSens-UV


COD/BOD/TSS/TOC Sensor

www.advanceanalytik.com

sales@advanceanalytik.com

VizSens-UV

The VizSens-UV series COD/BOD/TSS/TOC sensor represents a new era in environmental protection sensors, offering reagent-free, pollution-free, economical, and eco-friendly water quality monitoring. This sensor is compact, easily installable, and enables online continuous monitoring. With automatic turbidity interference compensation and an integrated cleaning device, it maintains excellent stability even during prolonged monitoring. Utilizing the UV-Visible spectrum, this sensor measures the absorption of organic substances at 254nm enabling compensation for optical path attenuation and turbidity effects, ensuring consistent and reliable measurement values.

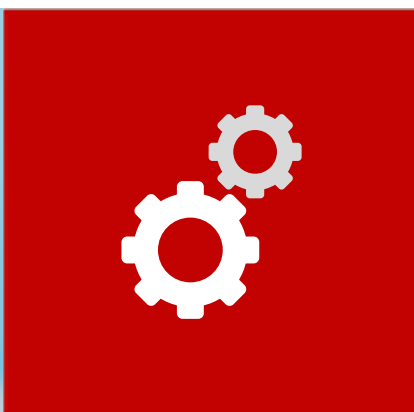


Product Features

- Direct immersion probe allows measurement without the need for sampling or pretreatment.
- No chemical reagents are required, eliminating the risk of secondary pollution.
- Equipped with an automatic cleaning wiper, which minimizes maintenance time.
- Operates within a spectral range of 200 nm to 750 nm, with built-in color and turbidity compensation.
- Provides rapid response time for continuous measurements.
- Includes reverse polarity protection for the sensor's power supply.

VizSens-UV

Technical Specifications

Measurement Method	
Measuring Range	COD: 0-1500mg/L , BOD: 0-1000mg/L , TOC: 0-1000mg/L , TSS: 0-1000mg/L , <i>*Range and path length can be customised as per requirement.</i>
Accuracy and Performance	
Accuracy	±2 %
Repeatability	±2 %
Resolution	0.01 mg/L
Pressure Range	≤ 0.1 Mpa
Sensor material	Body: SUS316L Cable: Polyurethane
Measuring temperature	0-45 °C
Cable Length	Standard:10m,can be extended to 100m
Sensor Protection	IP68/NEMA6P
Operating Temperature	0°C to 50°C
Dimensions	Diameter: 34mm, Length: 217mm
Weight	1 kg

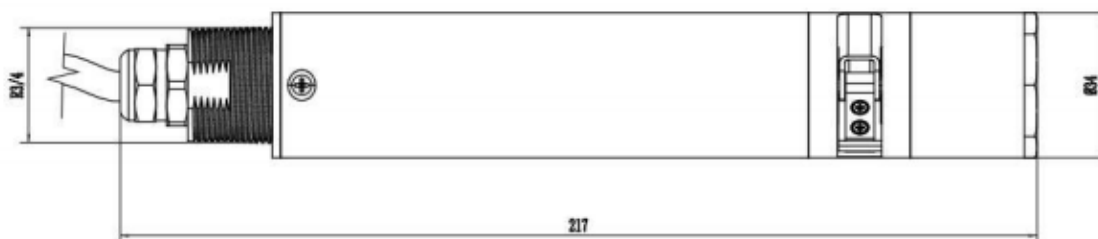



PRODUCT
DATASHEET '24

ADVANCE ANALYTIK

REVOLUTIONIZING ONLINE MONITORING SOLUTIONS



VizSens-PH(Analog) pH Sensor

www.advanceanalytik.com
sales@advanceanalytik.com

VizSens-PH(A)

pH Sensor

The VizSens-PH(A) pH Sensor is an essential tool for accurate pH monitoring across various applications, including water treatment, hydrological monitoring, wastewater treatment, swimming pools, fish ponds, and industries such as fertilizers, chemicals, and biology. Designed with a composite electrode that combines a glass indicating electrode and a reference electrode, this sensor provides reliable pH measurement for water-based environments.



Product Features

- **Repeatability and Stability:** Offers good stability and repeatability, suitable for fresh and sea water testing.
- **Measurement range:-** 0 - 14pH
- **Simple design:** Allows for easy manual cleaning.
- **Analog-Digital Conversion Module (Optional):** Enables digital signal output with high anti-jamming capacity and far transmission distance.
- **RS485 Digital Signal Output (Optional):** Achieves standard digital signal output via RS485, enabling integration and networking with other equipment without a controller.
- **Quick and Easy Installation:** Facilitates field installation through terminal connection.




VizSens-PH(A)

Technical Specifications

Physical Specifications	
Main Material	Black Polypropylene, Ag/AgCl Reference Gel
Weight	0.2KG
Dimensions	Dia. 28.7mm * Length 195mm
Cable Length	Standard: 10m, extendable to 20m
Measurement Specifications	
Measurement Range	0-14pH;
Measurement Accuracy	pH: ± 0.1 pH; Temperature: $\pm 0.5^{\circ}\text{C}$
Temperature Range	0-80 $^{\circ}\text{C}$
Pressure Range	≤ 0.6 Mpa
Zero Potential pH Value	7 ± 0.25 pH (15mV)
Slope	$\geq 95\%$
Internal Resistance	≤ 250 M Ω
Alkaline Error	0.2pH (1mol/L Na ⁺ pH14) (25 $^{\circ}\text{C}$)
Response Time	≤ 10 seconds (After stirring)



APPLICATIONS



Water Treatment Plants
Accurate pH measurement
for effective water treatment
processes.



Hydrological Monitoring
Essential for monitoring pH
levels in natural water
bodies.



Wastewater Treatment
Facilitates pH control in
wastewater treatment
systems.




Swimming Pools
Maintains optimal pH for safe
and comfortable swimming
environments.



Fish Ponds
Ensures suitable pH
conditions for aquatic life.



Fertilizers, Chemicals, and Biology Industries
Supports pH monitoring in
various industrial
processes.

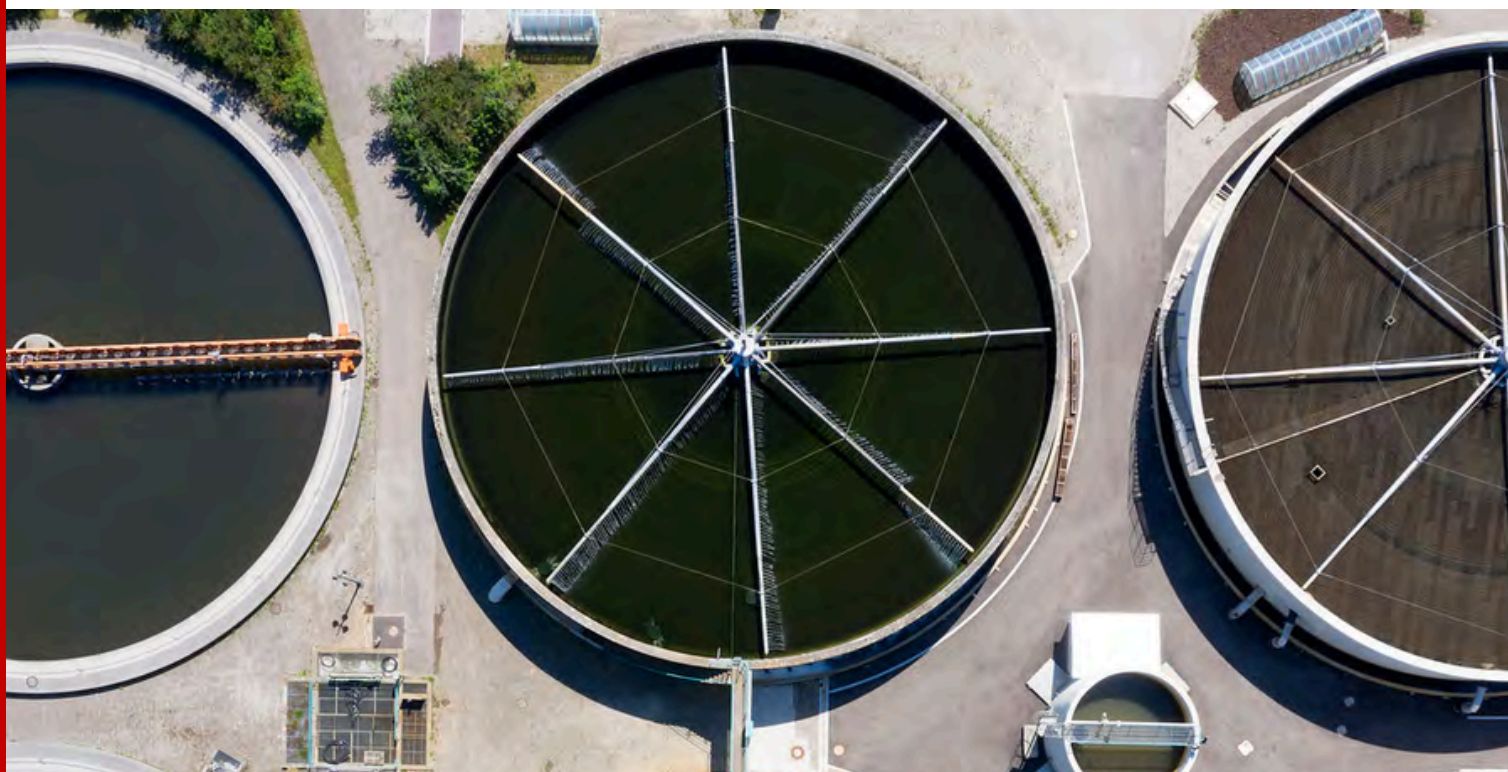

Note -

This data sheet serves as general information about the VizSens-PH(A). For specific technical details, installation guidelines, and troubleshooting assistance, please refer to the official user manual provided with the product.

For inquiries and detailed technical information, please contact sales@advanceanalytik.com.





LET'S CONNECT !

Let's work together to find a solution that works for you



Contact Us :

+36 70328 6862

1024, KeletiKarolyutca 48. fszt.

Budapest

<https://advanceanalytik.com>

sales@advanceanalytik.com

