

Clause 173 was added to IEEE Std 802.3-2022 by IEEE Std 802.3df-2024:

173. Physical Medium Attachment (PMA) sublayer, type 800GBASE-R

173.1 Overview

173.1.1 Scope

Change 173.1.1 as follows:

~~This clause specifies the Physical Medium Attachment (PMA) sublayer for the family of 800 Gb/s Physical Layer implementations, known as 800GBASE-R. The PMA allows the PCS (specified in Clause 172) to connect in a media-independent way with a range of physical media, or for the DTE 800GXS to connect to the PHY 800GXS (specified in Clause 171). The 800GBASE-R PMA(s) can support any of the 800 Gb/s PMDs in Table 169-1.~~

This clause specifies the Physical Medium Attachment (PMA) sublayer types that use bit-multiplexing for 800GBASE-R Physical Layer implementations.

When necessary to differentiate the bit-multiplexing PMA (BM-PMA) types defined in this clause from the symbol-multiplexing PMA (SM-PMA) types defined in Clause 176, the term BM-PMA is used. Within this clause the term PMA refers specifically to a BM-PMA.

Three types of ~~the~~ 800GBASE-R BM-PMA are defined: 32:8 PMA, 8:32 PMA, and 8:8 PMA.

Insert new subclause 173.1.1a as follows:

173.1.1a Introduction

The PMA allows the PCS (specified in Clause 172) to connect in a media-independent way with a range of physical media, or for the DTE 800GXS to connect to the PHY 800GXS (specified in Clause 171). The 800GBASE-R PMA supports any 8-lane PMD or 800GAUI-8 in Table 169-2 and Table 169-3.

173.4 PMA types

173.4.2 8:32 PMA

Change the last item in the dashed list in 173.4.2 as follows:

- The interface below the PMA (32 lanes) connects with a PHY 800GXS, 800GBASE-R 32:4 SM-PMA, 800GBASE-LR1 Inner FEC, or 800GBASE-ER1 FEC.

Replace Figure 173–4 with the following:

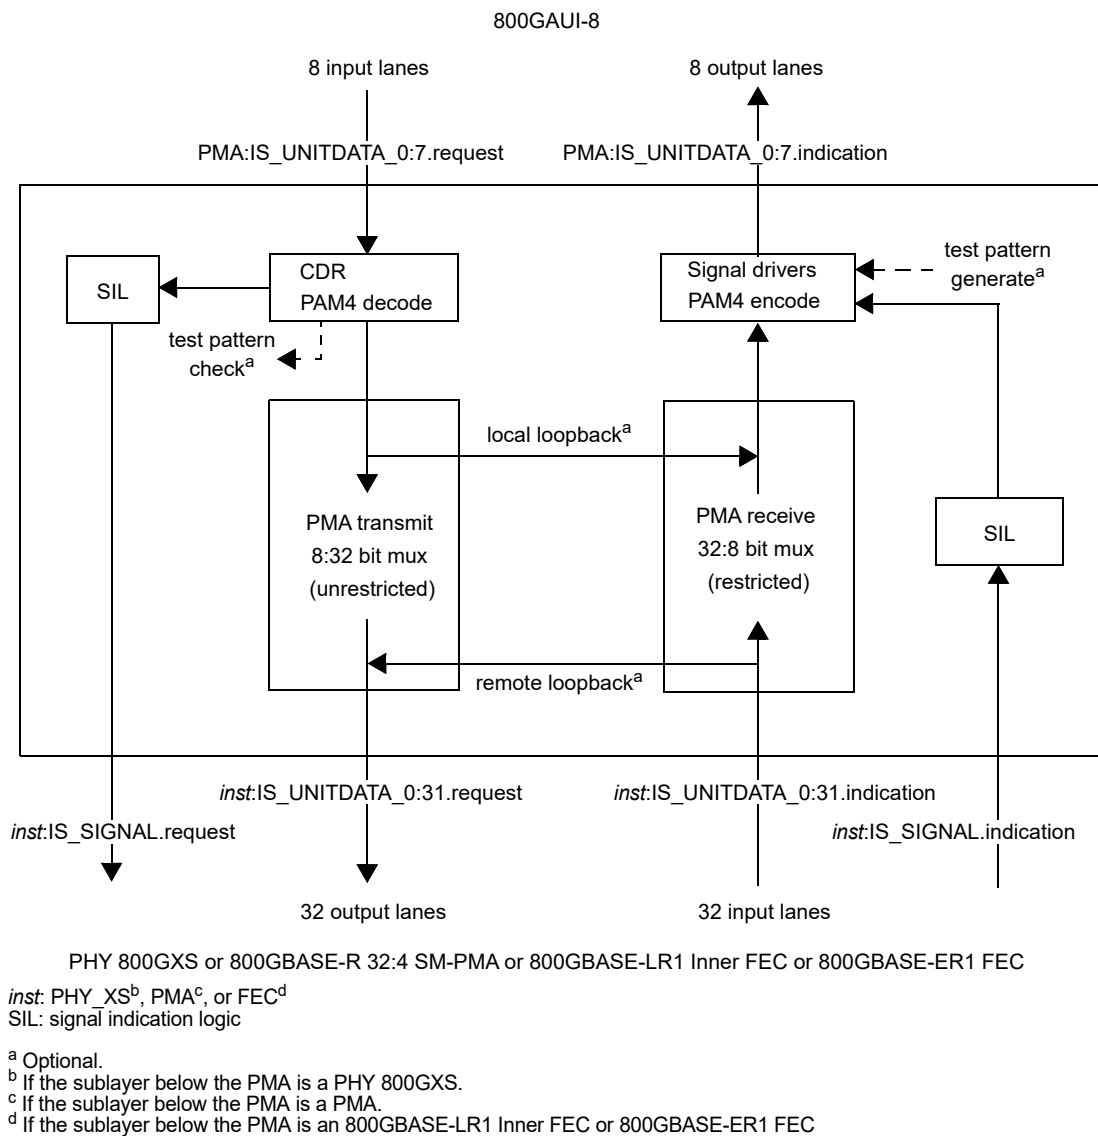


Figure 173–4—8:32 PMA functional block diagram