


Thermal Monitor Architecture

C and C++ implementations share the same behavior: poll temperature, convert by sensor type, evaluate thresholds, and drive panel LEDs.

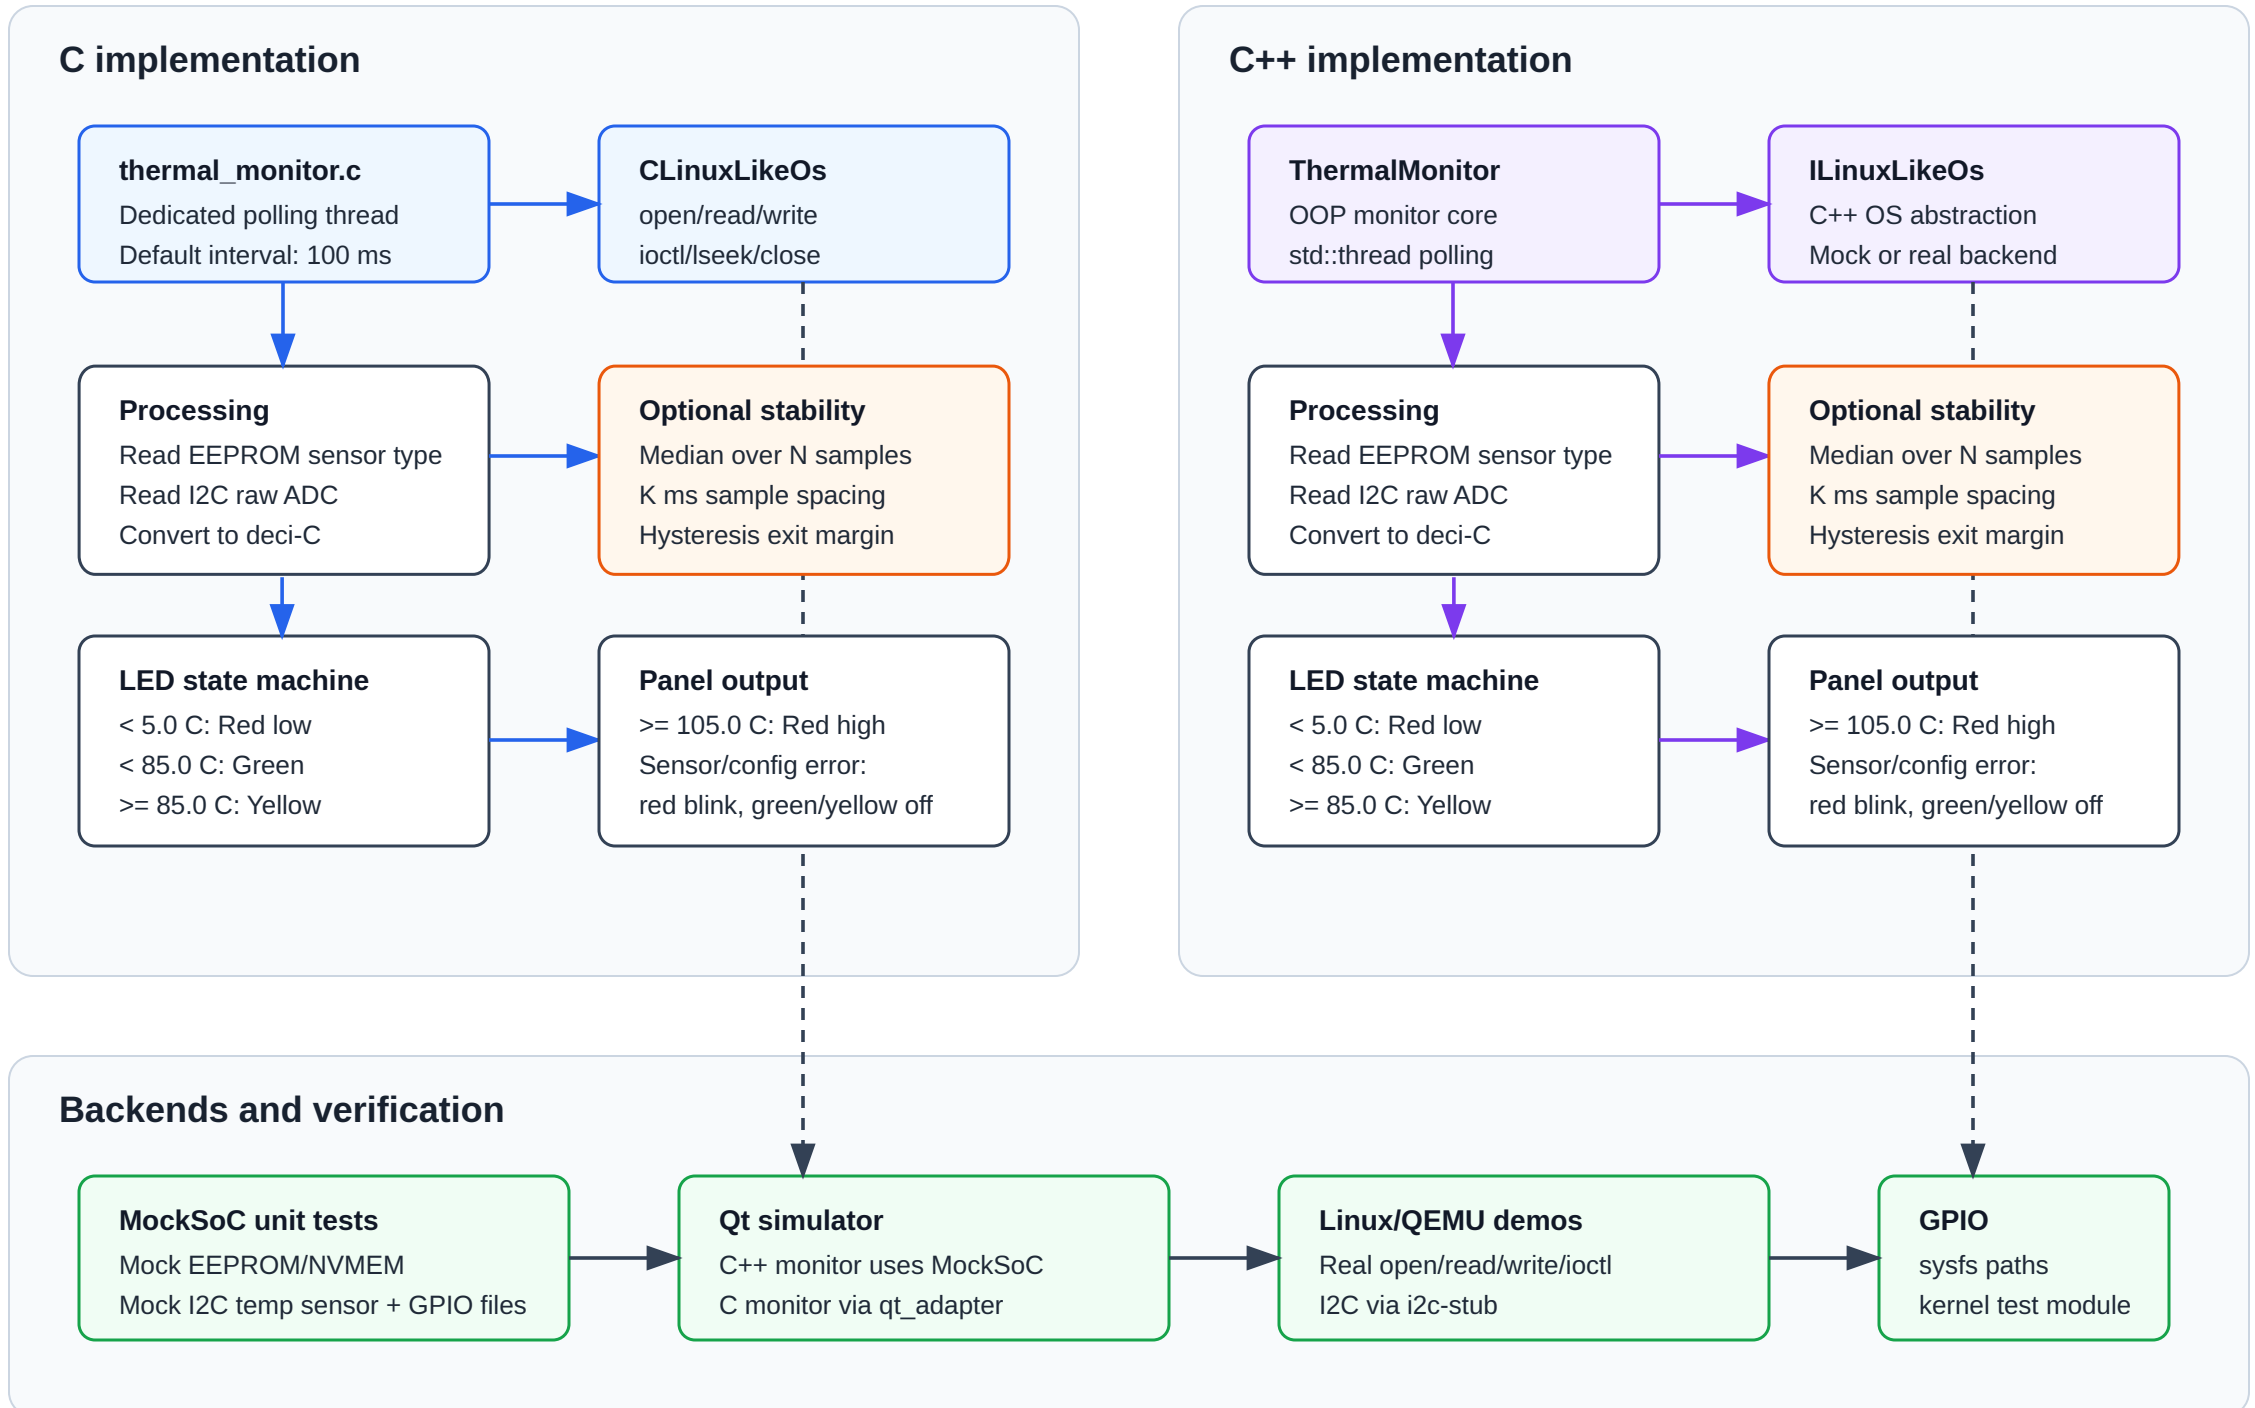

Default stability config is disabled: 1 sample, 0 ms spacing, 0 deci-C hysteresis. Threshold behavior still includes red below 5.0 C.