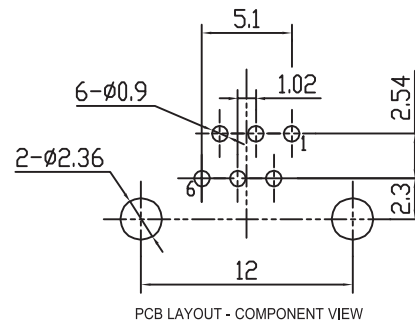



1	2	3	4	5
---	---	---	---	---



#### TECHNICAL CHARACTERISTICS

MATERIAL  
 INSULATOR MATERIAL: PBT  
 FLAMMABILITY RATING: UL94-V0  
 COLOR: BLACK  
 CONTACT MATERIAL: COPPER ALLOY  
 CONTACT TYPE: STAMPED  
 CONTACT PLATING: GOLD  
 QUALITY CLASS: 500 MATING CYCLES

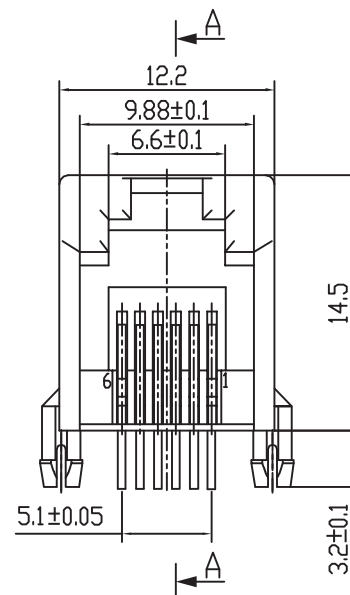
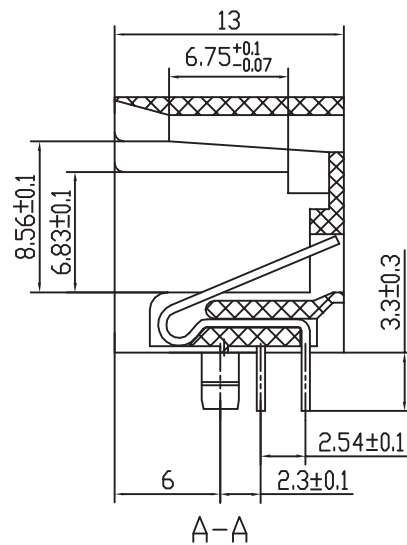
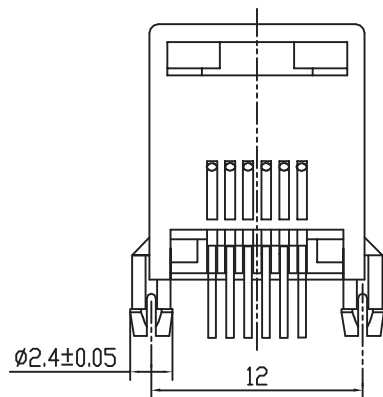
ENVIRONMENTAL  
 OPERATING TEMPERATURE: -40 °C UP TO 85 °C  
 COMPLIANCE: LEAD FREE AND ROHS



ELECTRICAL  
 CURRENT RATING: 1.5 A  
 WORKING VOLTAGE: 120 VAC  
 INSULATION RESISTANCE: >500 MOHM  
 DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MIN  
 CONTACT RESISTANCE: 20 mOHM MAX

STANDARD  
 CERTIFIED: E324776

SOLDERING  
 JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING  
 TRAY



RoHS Compliant				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = <math>\pm</math> 0.2</div> <div>.XX = <math>\pm</math> 0.15</div>	<div></div>	
G							
F							
E	30-JUL-15	SHIELDING	AK				
D	28-JUL-14	GENERAL UPDATE	AS				
C	06-JUN-14	MATERIAL COLOR	AS	APPROVAL: JTs	UNIT: MM	DESCRIPTION: HORIZONTAL PLASTIC 6P6C MODULAR JACK TAP UP	SIZE <b>A4</b>
B	03-JAN-14	UL & TEMP UPDATE	QL		SCALE:		
A	02-NOV-08	PDF	CH		SHEET: 1/2	WERI PART NO: 615 006 138 421	
REV	DATE	FILE	BY		DRAW:		



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[615006138421](#)