



Temperature & Humidity Sensor

Reference Manual

TBHH100-915
TBHH100-868

Table of Contents

1. Description	1
2. Specifications	2
2.1 Mechanical	2
2.1.1 Sensor	2
2.2 Environmental	2
2.3 Radio	2
2.4 Certifications and Conformity	2
2.5 Power	2
2.6 User Interface	2
2.7 Additional Features	2
3. Operation	4
3.1 Transport Mode	4
3.2 Default Operation	4
4. Messages	4
4.1 Status	4
4.1.1 Triggers	4
4.1.2 Payload	4
4.1.2 Payload (continue)	5
5. Battery	6
5.1 Replacement	6
5.2 Cautions	6
6. Label format information	7
6.1 Round label	7
6.1.1 All QR code	7
6.1.2 JoinEUI	7
6.1.3 DevEUI	7
6.1.4 Model number	7
6.1.5 Factory check code	8
6.1.6 Model Name	8
6.2 PE Bag & Back Label Label Barcode	8
7. Important Product & Safety Instructions	9
8. Warnings	10
9. Notices	11
10. Cautions	11
11. Regulatory	12
Appendix. Configuration Downlink Command	13
Appx. 1 Payload	13
Appx. 2 Response Content	14

1. Description

The Temperature & Humidity Sensor is designed for in-home and in-building usage for consumer or facility management applications. The design is optimized for high volume manufacturing, optimal battery lifetime, and pleasing aesthetics for in-building placement.

2. Specifications

2.1 Mechanical



2.2 Environmental

Temperature	0°C to +50°C
IP Rating	IP 40 equivalent

2.3 Radio

Frequency	<ul style="list-style-type: none">• 863–870MHz for EU• 902–928MHz for North America
Tx Power	US: +19dBm EU: +17dBm
Rx Sensitivity	-135dBm
Antenna Gain	-2dBi Peak, -5dBi Avg.

2.4 Certifications and Conformity

FCC ID: 2AMUGTBSP100
IC: 22980-TBSP100
CE
ROHS REACH

2.1.1 Sensor

Length x Width x Height	50mm x 20mm x 50mm
Weight	30g without battery 40g with battery
Sensor	Temperature & Relative Humidity

2.5 Power

Source	3.6V 1/2 AA Li-SOCl ₂ 1200mAh battery
Maximum Voltage	3.6V
Minimum Voltage	3.1V
Current	135mA maximum/ 100uA minimum

2.6 User Interface

LEDs	One blue LED
------	--------------

2.7 Additional Features

Battery Monitoring

3. Operation

3.1 Transport Mode

Sensors are shipped with a plastic battery insulating pull tab that must be removed before the operation.

3.2 Default Operation

During default operation, the device will send a message to the network once there is a sufficient delta in the environmental conditions or after 60 minutes of inactivity. The precise trigger values can be found in 4.1.1.

4. Messages

LoRaWAN Packets for this device use port 107.

4.1 Status

4.1.1 Triggers

Packet Triggers: 60-minute inactivity, ± 2 °C delta, ± 5 %RH Delta

4.1.2 Payload

Port	107
Payload Length	8 bytes

Bytes	0	1	2	3	4	5	6	7
Field	Status	Battery	Temp. (environment)	RH	CO ₂		VOC	

4.1.2 Payload (continue)

Status	Sensors status	
	Bits [7:0]	0x00: VOC sensor 0x08: Temperature and humidity sensor
Battery	Battery level	
	Bits [3:0]	unsigned value v, range 1 – 14; battery voltage in V = $(25 + v) \div 10$.
	Bits [7:4]	RFU
Temp(environment)	Temperature as measured by the digital sensor	
	Bits [6:0]	unsigned value τ , range 0 – 127; temperature in °C = $\tau - 32$.
	Bit [7]	RFU measurement range -32 to 95°C
RH	Relative humidity as measured by digital sensor	
	Bits [6:0]	unsigned value in %, range 0-100. The value 127 indicates measurement error.
	Bit [7]	RFU
CO₂	Equivalent CO₂ level as measured by digital sensor	
	Bits [15:0]	RFU The value is always displayed as 0xffff because no CO ₂ sensor is installed in this module.
VOC	Total Volatile Organic Compound Level as measured by the digital sensor	
	Bits [15:0]	RFU The value is always displayed as 0xffff because no VOC sensor is installed in this module.

5. Battery

5.1 Replacement

Use ER14250 or equivalent.

Remove the upper cap and replace the battery.



5.2 Cautions

CAUTION: Disposal of a battery (or battery pack) into a fire or a hot oven, or mechanically crushing or cutting of a battery (or battery pack) can result in an EXPLOSION!

Leaving a battery (or battery pack) in an extremely high temperature surrounding environment that can result in an EXPLOSION or leakage of flammable liquid or gas.

A battery (or battery pack) subjected to extremely low air pressure may also result in an EXPLOSION or leakage of flammable liquid or gas.

Discard used batteries according to the manufacturer's instructions.

CAUTION: The unit is provided with a battery-powered circuit.

There is a danger of explosion if the battery is incorrectly replaced.

Replace only with the same or equivalent type recommended by the manufacturer.
Discard used batteries according to the manufacturer's instructions.

Risk of Explosion if Battery is replaced by an Incorrect Type. Dispose of Used Batteries According to the Instructions.

6. Label format information

6.1 Round label



6.1.1 All QR code

URN:LWDP:58A0CB0000210000:58A0CBFFFFFFEFFFF:TBMS100915:4D4483B1.

The total maximum resulting character sentence is 72 alphanumeric characters long.

6.1.2 JoinEUI

900MHz: 58A0CB0000210000. (US/AU/AS923/BR)

800MHz: 58A0CB0001500000. (EU/IN/RU)

Uses a hexadecimal representation resulting in 16 characters.

6.1.3 DevEUI

58A0CBFFFFFFEFFFF.

Uses a hexadecimal representation resulting in 16 characters

6.1.4 Model number

TBHH100915

Sensor's model name

915 for US/AU/AS923/BR
868 for EU/IN/RU

Non-reserved characters(except ":" and space) with a maximum length of 20 characters.

6.1.5 Factory check code

4D4483B1.


Checksum of the factory production line.

6.1.6 Model Name


MODEL:TBHH100.

Fixed code, not including in QR code.

6.2 PE Bag & Back Label Label Barcode

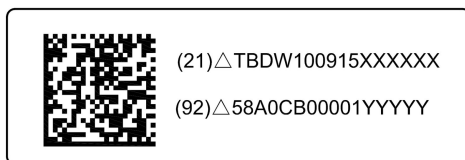

PE Bag Label

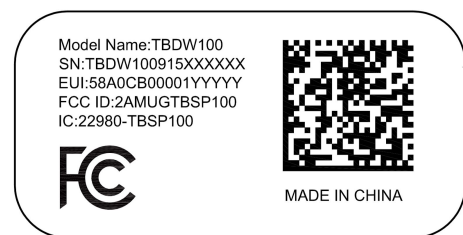

Back Label

Definition of Back Label and PE Bag Barcode Label:

GS1 DataBar DataMatrix

- The GS1 Application Identifier (21) indicates that the GS1 Application Identifier data field contains a serial number.
- The GS1 Application Identifier (92) assigned to the company's internal information is DevEUI.

7. Important Product & Safety Instructions

For the most current and more detailed information about Tabs features and settings as well as safety instructions, please download the user manual for the products online at www.browan.com before the use of any Tabs products or services.

Certain sensors contain magnets. **Keep away from ALL Children!** Do not put in nose or mouth. Swallowed magnets can stick to intestines causing serious injury or death. Seek immediate medical attention if magnets are swallowed.

These products are not toys and contain small parts that can be dangerous to children under 3 years old. Do not allow children or pets to play with products.

Observe proper precautions when handling batteries. Batteries may leak or explode if improperly handled.

Observe the following precautions to avoid a sensor explosion or fire:

- Do not drop, disassemble, open, crush, bend, deform, puncture, shred, microwave, incinerate or paint the sensors, Hub or other hardware.
- Do not insert foreign objects into any opening on the sensors or Hub, such as the USB port.
- Do not use the hardware if it has been damaged—for example, if cracked, punctured or harmed by water. Disassembling or puncturing the battery (whether integrated or removable) can cause an explosion or fire.
- Do not dry the sensors or battery with an external heat source such as a microwave oven or hairdryer.

8. Warnings

- Do not place naked flame sources, such as lighted candles, on or near the equipment.
- The battery shall not be exposed to excessive heat such as sunshine, fire or the like.
- Do not dismantle, open or shred battery pack or cells.
- Do not expose batteries to heat or fire. Avoid storage in direct sunlight.
- Do not short-circuit the battery. Do not store batteries in a box or drawer where they may short-circuit each other or be short-circuited by other metal objects.
- Do not remove a battery from its original packaging until required for use.
- Do not subject batteries to mechanical shock.
- In the event of a battery leaking, do not allow the liquid to come in contact with the skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice.
- Do not use any charger other than that specifically provided for use with the equipment.
- Observe the plus (+) and minus (-) marks on the battery and equipment and ensure correct use.
- Do not use any which is not designed for use with the product.
- Do not mix cells of different manufacture, capacity, size or type within a device.
- Keep batteries out of the reach of children.
- Seek medical advice immediately if a battery has been swallowed.
- Always purchase the correct battery for the equipment.
- Keep batteries clean and dry.
- Wipe the battery terminals with a clean dry cloth if they become dirty.

9. Notices

- Avoid exposing your sensors or batteries to very cold or very hot temperatures. Low or high temperature conditions may temporarily shorten the battery life or cause the sensors to temporarily stop working.
- Take care in setting up the Hub Gateway and other hardware. Follow all installation instructions in the User Guide. Failure to do so may result in injury.
- Do not install hardware equipment while standing in water or with wet hands. Failure to do so can result in electric shock or death. Use caution when setting up all electronic equipment.
- When charging the sensors, do not handle the sensors with wet hands. Failure to observe this precaution could result in electric shock.
- PROP 65 WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm
- Cleaning Tabs Products: Use a clean dry cloth or wipe to clean Tabs products. Do not use detergent or abrasive materials to clean the Tabs products, as this may damage the sensors.

10. Cautions

CAUTION: Disposal of a battery (or battery pack) into a fire or a hot oven, or mechanically crushing or cutting of a battery (or battery pack) can result in an **EXPLOSION!**

Leaving a battery (or battery pack) in an extremely high temperature surrounding environment that can result in an **EXPLOSION** or leakage of flammable liquid or gas.

A battery (or battery pack) subjected to extremely low air pressure may also result in an **EXPLOSION** or leakage of flammable liquid or gas.

Discard used batteries according to the manufacturer's instructions.




CAUTION: The unit is provided with a battery-powered circuit.

There is a danger of **EXPLOSION** if the battery is incorrectly replaced.

Replace only with the same or equivalent type recommended by the manufacturer. Discard used batteries according to the manufacturer's instructions.

Risk of **EXPLOSION** if Battery is replaced by an Incorrect Type. Dispose of Used Batteries According to the Instructions.

11. Regulatory

 	<p>Hereby, Browan Communications Inc. declares that the radio equipment for Tabs products is in compliance with Directive 2014/53/EU.</p> <p>This device complies with Part 15 of the FCC Rules and RSS Standards of Industry Canada. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.</p> <p>For the full FCC/IC Compliance Statements and EU declaration of conformity, visit www.browan.com/#/Contact</p>
	<p>This symbol means that according to local laws and regulations your product should be disposed of separately from household waste. When this product reaches its end of life, take it to a collection point designated by local authorities. Some collection points accept products for free. The separate collection and recycling of your product at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment.</p>

Appendix. Configuration Downlink Command

Port	204
Payload Length	3 bytes

Appx. 1 Payload

Bytes	0	1	2
Field	Cmd	Config	

Cmd	<div><div>Command</div><div>1 byte</div></div> <div><div>Bit [3:0]</div><div><div>0x00 – Set keep alive interval. default : 3600 sec. (min: 15 sec)</div><div>0x01 – Set sensor detection interval. (Must be lesser than “keep-alive interval”) default : 60 sec. (min: 15 sec)</div><div>0x02 – Temperature trigger value. default : 2 °C.</div><div>0x03 – Humidity trigger value. default : 5 %RH.</div></div></div>															
Config	<div><div>Configuration</div><div>1 or 2 bytes</div></div> <div>See the table as follows:</div> <table><tr><th>Command</th><th>Command Description</th><th>Data Length</th></tr><tr><td>0x00(1byte)</td><td>Set kee- alive interval. *Note: little-endian format.</td><td>2 bytes</td></tr><tr><td>0x01(1byte)</td><td>Set the sensor detection interval. *Note: little-endian format. *Note: fewer than “keep-alive time”.</td><td>2 bytes</td></tr><tr><td>0x02(1byte)</td><td>Set temperature trigger value.</td><td>1 byte</td></tr><tr><td>0x03(1byte)</td><td>Set humidity trigger value.</td><td>1 byte</td></tr></table>	Command	Command Description	Data Length	0x00(1byte)	Set kee- alive interval. *Note: little-endian format.	2 bytes	0x01(1byte)	Set the sensor detection interval. *Note: little-endian format. *Note: fewer than “keep-alive time”.	2 bytes	0x02(1byte)	Set temperature trigger value.	1 byte	0x03(1byte)	Set humidity trigger value.	1 byte
Command	Command Description	Data Length														
0x00(1byte)	Set kee- alive interval. *Note: little-endian format.	2 bytes														
0x01(1byte)	Set the sensor detection interval. *Note: little-endian format. *Note: fewer than “keep-alive time”.	2 bytes														
0x02(1byte)	Set temperature trigger value.	1 byte														
0x03(1byte)	Set humidity trigger value.	1 byte														
Payload Content	<div><div>Command content</div><div>Ex: 00100E 013C00 0202 0305 00 100E => Keep alive interval : 0x0E10 -> 3600 (sec) 01 3C00 => Monitor time interval : 0x003C -> 60 (sec) 02 02 => Temperature trigger value : 0x02 -> 2 (°C) 03 05 => Humidity trigger value : 0x05 -> 5 (%RH)</div></div>															

Appx. 2 Response Content

(Only for unconfirmed downlink)

Port	204
Payload Length	12 bytes

Payload Content	Response content
	<p>Ex:</p> <p>00100e 013c00 0202 0305 806b</p> <p>00 100e => Keep alive interval : 0x0E10 -> 3600 (sec)</p> <p>01 3c00 => Monitor time interval : 0x003C -> 60 (sec)</p> <p>02 02 => Temperature trigger value : 0x02 -> 2 (°C)</p> <p>03 05 => Humidity trigger value : 0x05 -> 5 (%RH)</p> <p>806b => Payload check byte: RFU</p>