

## SECTION 2 – PREINSTALLATION

### 2–1 ENVIRONMENTAL REQUIREMENTS

STORAGE PRIOR TO INSTALLATION. Store Compact PDU only in an environment which meets the following conditions:

- Temperature: –30 to 140 °F  
–17 to 60 °C
- Humidity: 20% to 80% non–condensing
- Altitude: 0 to 8000 ft (0 to 2440 m)

OPERATING ENVIRONMENT. Provide an operating environment which meets the following conditions:

- Ambient temperature: 50 to 80 °F  
10 to 27 °C
- Ambient temperature change: 5 °F (2.8 °C) per hour
- Ambient temperature gradient: maximum 5 °F (2.8 °C)
- Relative humidity: 30% to 60% non–condensing,  
maximum rate of change of 5% per hour
- Magnetic field: maximum 200 gauss
- Altitude: 0 to 8000 ft (0 to 2440 m)

### 2–2 FLOOR LOADING

Compact PDU has a base of 22.1 X 30 in. (56 X 76 cm). Provide a floor with strength sufficient for loads specified in Table 2–1.

TABLE 2–1  
FLOOR LOADING


| MODEL                                  | FLOOR LOADING                      |
|----------------------------------------|------------------------------------|
| 46–317099P8/P9/P10/P11/P13/P14/P15/P16 | 233 lbs/sq. ft.<br>1,143 kg/sq. m. |
| 46–317099P12                           | 278 lbs/sq. ft.<br>1,116 kg/sq. m. |

### 2–3 FLOOR LAYOUT AND CABLE ACCESS

Locate Compact PDU close to power source to minimize line inductance.

Interconnection cables may be routed into Compact PDU through rear panel, or either side of bottom panel. See Illustration 2–1.

After installation, minimum service access area for Compact PDU is 3 ft (91 cm) in the front. Some service is easier with access to either side panel, but side access is not required. See Illustration 2–2.

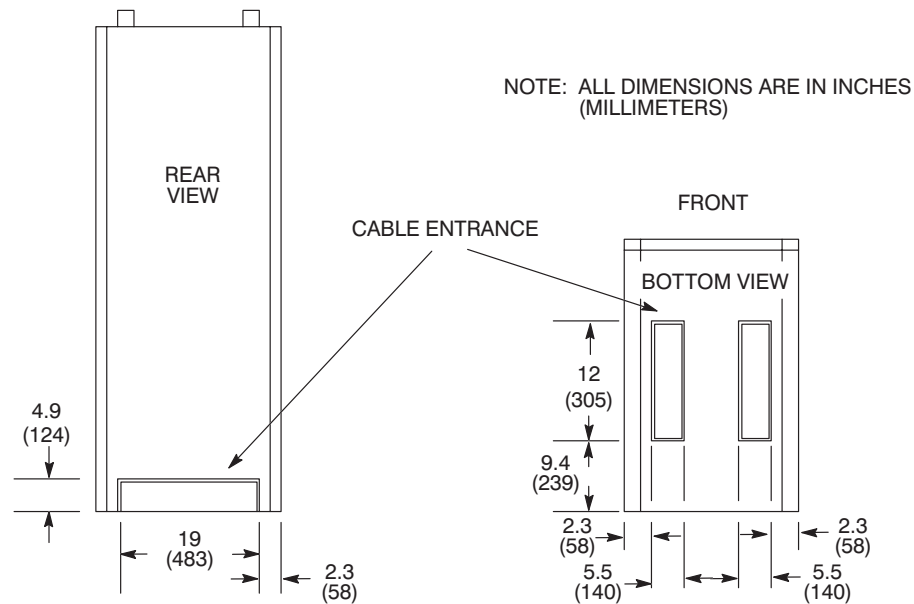

**CABLE ENTRANCE**  
ILLUSTRATION 2–1

### 2–4 SEISMIC INFORMATION


Compact PDU center of gravity is shown in Illustration 2–2. See Table 2–2 for dimensions.

For a mobile installation, or if required by local seismic code, mount Compact PDU to floor using two angle brackets. Mount top of Compact PDU to wall on either side or back. Use a wall angle bracket.

## 2–4 SEISMIC INFORMATION (continued)

## NOTE:

- ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)
- APPROX. WEIGHT: 1000 lbs. (455 kg)
-  INDICATES AIR FLOW
-  INDICATES CENTER OF GRAVITY. DIMENSIONS A, B, C SEE TABLE 2–2.

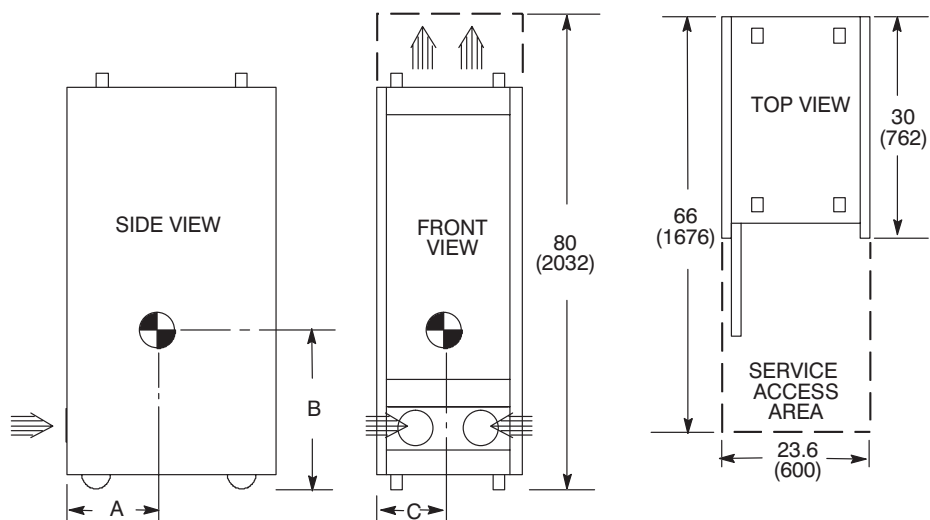

**SERVICE AND VENTILATION CLEARANCE**  
ILLUSTRATION 2–2

TABLE 2–2  
CENTER OF GRAVITY

| DIMENSION<br>(SEE ILLUS. 2–2) | MODEL<br>DIMENSIONS ARE IN INCHES (MILLIMETERS) |              |
|-------------------------------|-------------------------------------------------|--------------|
|                               | 46–317099P8 through P16 except P12              | 46–317099P12 |
| A                             | 17.4 (442)                                      | 17.5 (445)   |
| B                             | 18.7 (475)                                      | 15.2 (386)   |
| C                             | 12.5 (318)                                      | 12.6 (320)   |

## 2–5 ROUTE TO INSTALLATION SITE



Compact PDU weighs about 1000 lbs (455 kg). Use care when rolling Compact PDU. It weighs 250 lbs (114 kg) per caster. Plywood or steel plates may be used to distribute weight and protect floor surface from overload damage.

**2–5 ROUTE TO INSTALLATION SITE (continued)**

Compact PDU can be rolled on integral casters to the installation site with protective cardboard packaging still in place, all doors and corridors must be 24 X 71 in. (61 X 181 cm) or larger. For Compact PDU dimensions refer to Table 2–3.

Any elevator en route to installation site must be of a size and weight–bearing capacity to carry Compact PDU. With protective cardboard packaging in place, each Compact PDU with voltage regulation (Models 46–317099 P8 through P16 except P12) weighs 970 lbs (440 kg). Model 46–317099P12 weighs 870 lbs (395 kg) with packaging. For net weight refer to Table 2–3.

TABLE 2–3  
SITE PLANNING SPECIFICATIONS

| MODEL 46–317099 >                    | P8/P10/P15/P16                  | P9/P11/P13/P14     | P12         |
|--------------------------------------|---------------------------------|--------------------|-------------|
| NOMINAL INPUT VOLTAGE                | 480                             | 380/415            | 380/415/480 |
| INPUT VOLTAGE RANGE                  | 415–502                         | 329–397<br>359–434 | 327–502     |
| MAXIMUM INPUT VOLTAGE                | 502                             | 434                | 502         |
| NOMINAL RATED CURRENT (A)            | 66                              | 95                 | 95          |
| MAXIMUM RATED CURRENT (A)            | 80                              |                    |             |
| FREQUENCY (Hz)                       | 60                              | 50/60              | 50/60       |
| COOLING REQUIREMENT (BTU/hr)         | 7000                            |                    |             |
| AMBIENT TEMPERATURE F (C)            | 80 (26.7)                       |                    |             |
| THE FOLLOWING ARE WITHOUT PACKAGING: |                                 |                    |             |
| SIZE H X W X D in. (cm)              | 70 X 22.1 X 30 (1779 X 56 X 76) |                    |             |
| WEIGHT lbs (kg)                      | 854 (388)                       | 933 (424)          | 820 (372)   |

**2–6 DELIVERY INFORMATION**

All Compact PDU's are wrapped in plastic and shipped on integral casters.

Roll to installation site on integral casters.