


820-0234 - Install Instructions - Signal Box (P/N: 205-0121-06) GE P/N: 5269691

Tools Required:

- Flat bladed screwdriver
- Hoist Assembly (Lytron P/N: 205-0121-17)

Removal Procedure:

1. Perform shutdown of system in accordance with Lytron manual #820-0190.
2. Lockout/Tag out system in accordance with GE procedures.
3. Install Hoist Assembly as per Lytron Instructions 820-0253.
4. Open front cover of Signal Box by loosening 6 thumbscrews.
5. Attach door by inserting door tabs into built-in hinge holes in Signal Box frame.
6. Remove the following cables plugs from their respective sockets on the right side of the Signal Box:
 - a. J11 through J28
7. Attach hoist chain eyelet to top of Signal Box. Take out any slack in chain.
8. Loosen 4 thumbscrews that secure the Signal Box to the machine frame. (Refer to Photo 1)

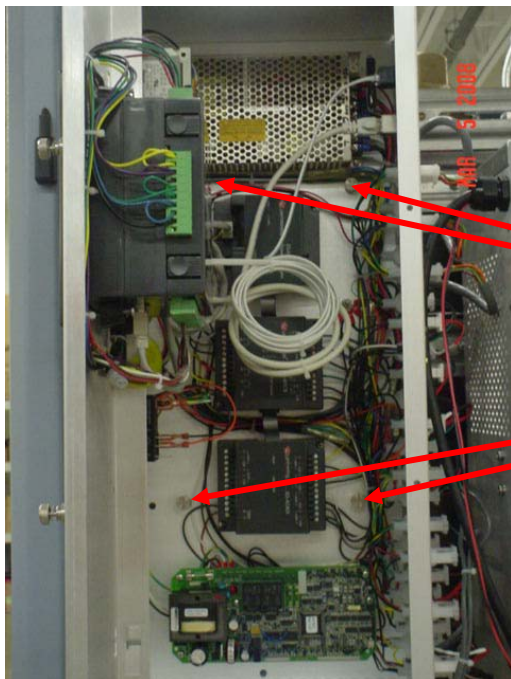

Thumbscrews – (1)
in each corner

Photo 1 Signal Box interior- thumbscrew location

9. Place Hoist ratchet handle in the “UP” position.
10. While support Signal Box with one hand, lift the box up by ratcheting the hoist ratchet handle. Continue to lift until the Signal Box can clear the machine main cabinet.

11. Slide Signal Box out of the interior of the machine main cabinet by moving the hoist ratchet handle along the hoist beam track.
12. Place box or pallet on the floor beneath the suspended Signal Box.
13. Place the Hoist ratchet handle in the "DOWN" position.
14. Slowly lower Signal Box to awaiting pallet or shipping box.
15. Unhook the Hoist chain hook from the Signal Box.

End of Procedure

Installation Procedure:

1. Remove new Signal Box front cover by loosening 4 screws.
2. Attach Hoist chain hook to the lifting eyelet on the new Signal Box.
3. Place Hoist ratchet handle in the "UP" position.
4. Carefully ratchet up the Signal Box until it can be moved into mounting position.
5. When the Signal Box is at the correct height, slide the Signal Box into machine main cabinet by moving the Hoist ratchet handle along the Hoist beam track.
6. Position the Signal Box so that the mounting holes in the main cabinet frame align with thumbscrews on the Signal Box.
7. Tighten one thumbscrew at a time to just finger tight. Tighten thumbscrew and then its opposite counterpart until all thumbscrews are secure.
8. Disconnect Hoist chain hook from Signal Box.
9. Plug connectors J1 through J28 into the appropriate jack on the right side of the Signal Box.
10. Replace front cover on the Signal Box.
11. Remove Hoist Assembly from machine.
12. Remove Lockout/Tagout in accordance with GE procedures.
13. Start system per Lytron manual #820-0190.

End of Procedure