

Effectivity

The following CT Equipment is affected:

2260619 LightSpeed Plus Gantry Assembly

Purpose

The purpose of this FMI is to upgrade the CT gantry with a new intercom board.

Furnished Materials

FMI Kit Part Number 2299382 includes the items listed below.

Qty	Description	Part #
1	FMI Document	2299186-100
1	Intercom Board	2286305

Special Tools and Test Equipment

Qty	Description	Part #
1	ESD Wrist-Band	
1	Phillips #1 Screwdriver	
1	¼" Ratchet	
1	6" Extension	
1	7mm Socket	

Disposal

U.S. ONLY

- 1.) Place the old Intercom board into the static bag used to ship the new board.
- 2.) Seal the bag and reuse the box for shipment.
- 3.) Mail to:

***GEMS Recycling Center
c/o ACE Warehouse, Bldg. 11
2200 College Avenue
Cudahy, WI 53110***

- 4.) Destroy and/or dispose of all obsolete hardware, software and documentation according to GE policy.

INTERNATIONAL SITES (OUTSIDE THE U.S.)

Destroy and/or dispose of all obsolete hardware, software and documentation according to GE policy.

People Power

Allow 0.75 hours of labor for the completion of this intercom board upgrade.

Procedure

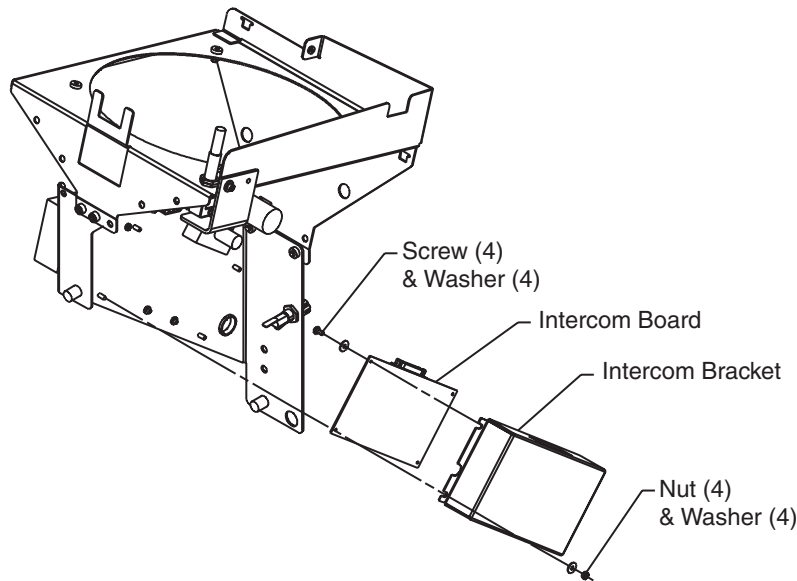


Figure 1 Intercom Assembly

- 1.) Remove right side gantry cover.
- 2.) Turn off all 3 switches (Axial Drive, HVDC, 120VAC) on the STC backplane.
- 3.) Use the 7mm socket (with the quarter inch ratchet) to loosen, but not remove, the 2 lower nuts and washers.

Note: Be careful not to lose the nuts and washers. Also notice that the flat washer is installed first, then the lock washer and then the nut.

- 4.) Remove 2 upper nuts and washers.
- 5.) Disconnect control cable.
- 6.) Remove 4 screws that secure intercom board.
- 7.) Reinstall intercom board in reverse order.
 - Verify that J2 jumper is in auto position.
 - Reattach control cable.
 - Be sure to torque screws to 9 inch-pounds for rotational force integrity.
- 8.) Restore power to gantry, by setting STC service switches to ON.
- 9.) Play canned AUTOVOICE messages, to verify operation of intercom.
- 10.) Replace right side gantry cover.

End of Document