

FCT SERVICE NOTE

SN05120511a

Class A Service information enclosed.

Date: December 5, 2005

Subject: VCT Save State Issue for Detector Config File

Effectivity: This applies ONLY to 05MW31.6.V40_H_V64_G_GTL and **must be performed after each completed software Load From Cold.** This needs to be done after the LFC and before a SaveState is performed. Keep a copy of these instructions with the software CDs as a reminder.

ISSUE: Save System State does not save the necessary detector configuration files for 05MW31.6.V40_H_V64_G_GTL software release. This is a known software bug, which will be fixed in the M4 software release. Failure to perform the defined corrective action will cause FRDM Wizard Tool failures when replacing detector modules.


CORRECTIVE ACTION: Create a backup copy and edit the Save System State configuration file to correct a mistake in a filename. This will then have the Detector configuration file saved with each Save State. Make sure a Save State is performed after this update to have a complete State backup.

PROCEDURE START:

Step 1:

Open a shell and execute the following commands: (Your entries/mouse actions are in bold type)

```
{ctuser@hostname} [1] cd /usr/g/config
{ctuser@hostname} [2] ls -al Sys*
See Figure 1 for output
{ctuser@hostname} [3] cp SysState.cfg.hp SysState.cfg.hp.lfc
{ctuser@hostname} [4] ls -al Sys*
See Figure 1 for output
{ctuser@hostname} [5] nedit SysState.cfg.hp
New editor window opens. See Figure 2.
```

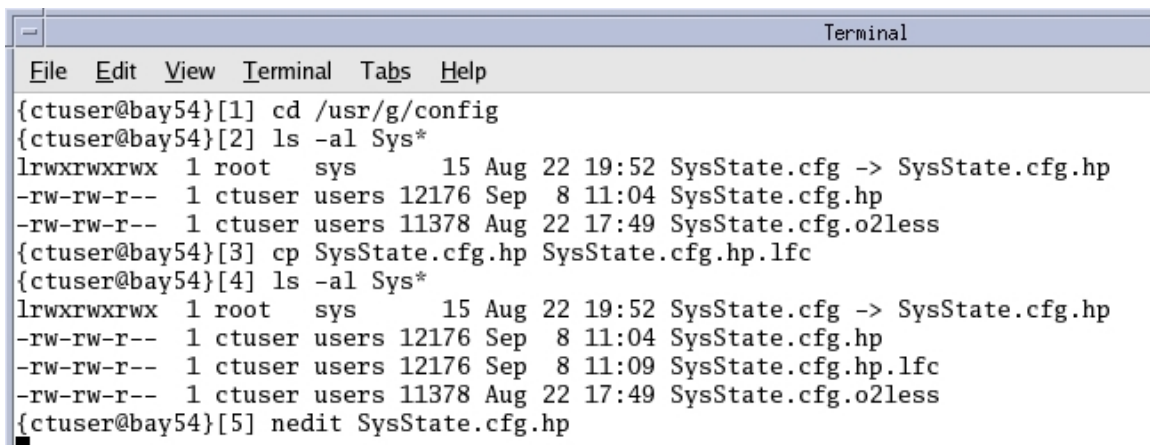

```
Terminal
File Edit View Terminal Tabs Help
{ctuser@bay54}[1] cd /usr/g/config
{ctuser@bay54}[2] ls -al Sys*
lrwxrwxrwx 1 root sys 15 Aug 22 19:52 SysState.cfg -> SysState.cfg.hp
-rw-rw-r-- 1 ctuser users 12176 Sep 8 11:04 SysState.cfg.hp
-rw-rw-r-- 1 ctuser users 11378 Aug 22 17:49 SysState.cfg.o2less
{ctuser@bay54}[3] cp SysState.cfg.hp SysState.cfg.hp.lfc
{ctuser@bay54}[4] ls -al Sys*
lrwxrwxrwx 1 root sys 15 Aug 22 19:52 SysState.cfg -> SysState.cfg.hp
-rw-rw-r-- 1 ctuser users 12176 Sep 8 11:04 SysState.cfg.hp
-rw-rw-r-- 1 ctuser users 12176 Sep 8 11:09 SysState.cfg.hp.lfc
-rw-rw-r-- 1 ctuser users 11378 Aug 22 17:49 SysState.cfg.o2less
{ctuser@bay54}[5] nedit SysState.cfg.hp
```

Figure 1

Step 2:

In the editor window **Scroll Down** until the following line is seen;

```
charactFileList_46 = { host = OC, file = /usr/g/service/state/config_tracker/masterDCF.xml, req = N}
```



Figure 2

Using the cursor, **left click** and highlight the first lower case "m" in "masterDCF.xml" only. See figure 2.

With this letter highlighted type a capital M on the keyboard: **Shift + M**

The lower case "m" has been changed to an uppercase "M". See figure 3.

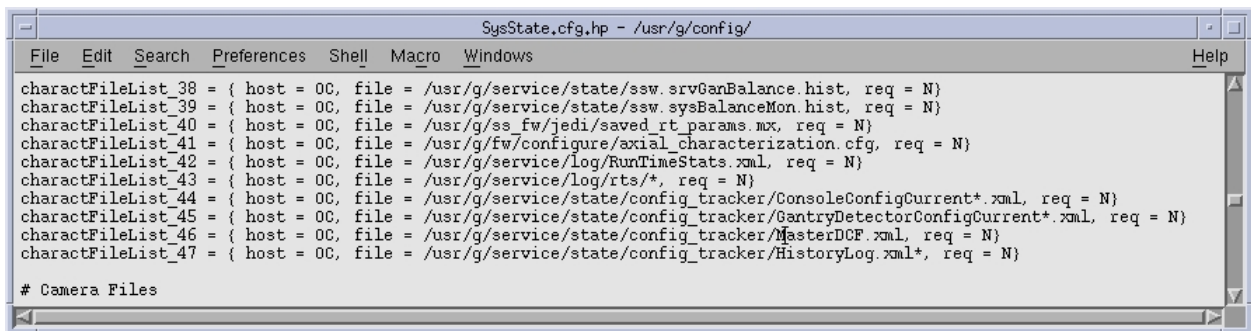


Figure 3

Save the file and exit:

Left Click the **File** Pull down and select **Save**.


Left Click the **File** Pull down and select **Exit**.

Step 3:

In the open shell window type the following;

```
{ctuser@hostname} [6] diff SysState.cfg.hp SysState.cfg.hp.lfc
```

Verify the only difference between these two files is the "M" in MasterDCF.xml is capitalized. See Figure 4.

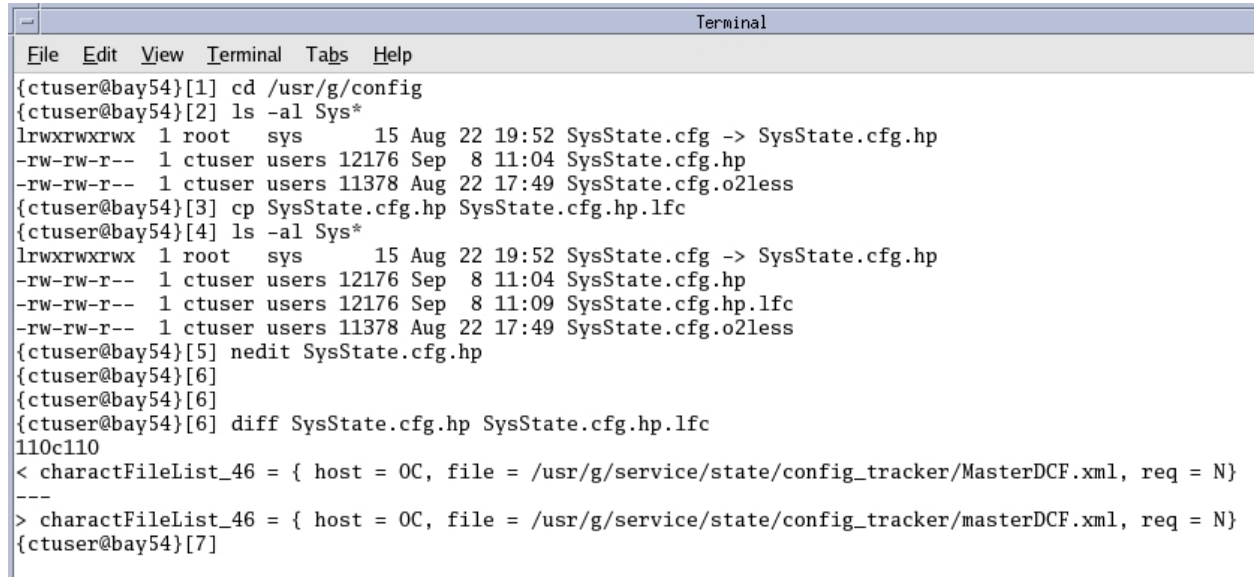

```
Terminal
File Edit View Terminal Tabs Help
{ctuser@bay54}[1] cd /usr/g/config
{ctuser@bay54}[2] ls -al Sys*
lrwxrwxrwx 1 root sys 15 Aug 22 19:52 SysState.cfg -> SysState.cfg.hp
-rw-rw-r-- 1 ctuser users 12176 Sep 8 11:04 SysState.cfg.hp
-rw-rw-r-- 1 ctuser users 11378 Aug 22 17:49 SysState.cfg.o2less
{ctuser@bay54}[3] cp SysState.cfg.hp SysState.cfg.hp.lfc
{ctuser@bay54}[4] ls -al Sys*
lrwxrwxrwx 1 root sys 15 Aug 22 19:52 SysState.cfg -> SysState.cfg.hp
-rw-rw-r-- 1 ctuser users 12176 Sep 8 11:04 SysState.cfg.hp
-rw-rw-r-- 1 ctuser users 12176 Sep 8 11:09 SysState.cfg.hp.lfc
-rw-rw-r-- 1 ctuser users 11378 Aug 22 17:49 SysState.cfg.o2less
{ctuser@bay54}[5] nedit SysState.cfg.hp
{ctuser@bay54}[6]
{ctuser@bay54}[6]
{ctuser@bay54}[6] diff SysState.cfg.hp SysState.cfg.hp.lfc
110c110
< charactFileList_46 = { host = 0C, file = /usr/g/service/state/config_tracker/MasterDCF.xml, req = N}
---
> charactFileList_46 = { host = 0C, file = /usr/g/service/state/config_tracker/masterDCF.xml, req = N}
{ctuser@bay54}[7]
```

Figure 4

Step 4:

A SaveState can be performed and it will contain all the required configuration files for any subsequent software reload. Remember this procedure must be done again for any load from cold with this same software revision.

Steve Merritt

FCT Service Engineering